

# Expansion PEX x Male Sweat Copper Fitting Adapter

(Lead Free Brass)

## FEATURES

- **Made for use with PEX-A tubing**
- **Lead Free** – Made from lead free C46500 brass alloy for safe and effective use in commercial and residential jobs
- **Durable** – Carries a 250PSI/180°F pressure/temperature rating to withstand a wide range of job settings
- **Compliance Notes**

Meets ASTM Standard F876-877


Meets the Following NSF/ANSI Standards: 14, 61, 372

Meets SE, CSA B137.5



PLEASE NOTE: THIS PRODUCT IS SUSCEPTIBLE TO DEZINCIFICATION AND DOES NOT HOLD A HIGH DZR RATING. THIS PRODUCT SHOULD NOT BE USED IN APPLICATIONS WHERE BRASS PARTS MAY BE EXPOSED TO HARD WATER (HIGH SULFUR OR MINERAL CONTENT).

SKU: PPSA050, PPSA075, PPSA100, PPSA125, PPSA150,  
PPSA200, PPSA050-075, PPSA058-075, PPSA075-050

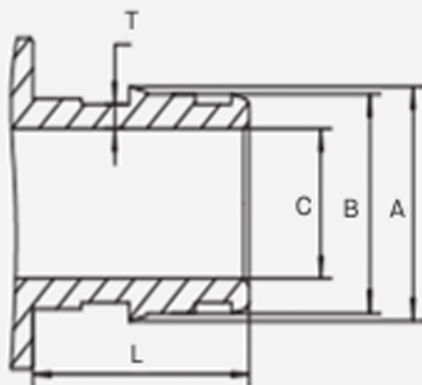

Insert for Fittings Size					
Size	A	B	C	L	T
3/8"	0.476"	0.437"	0.26"	0.591"	0.047"
1/2"	0.614"	0.575"	0.378"	0.709"	0.057"
5/8"	0.744"	0.693"	0.50"	0.866"	0.057"
3/4"	0.87"	0.791"	0.595"	0.945"	0.057"
1"	1.106"	1.028"	0.795"	1.181"	0.072"
1-1/4"	1.357"	1.271"	0.96"	1.445"	0.075"
1-1/2"	1.49"	1.378"	1.084"	1.704"	0.095"
2"	2.075"	1.954"	1.55"	2.147"	0.095"