


PVC Schedule 40 Reducer Coupling

FEATURES

- **Fully-Compliant** – Meets UPC, NSF, and ASTM D2665 standards for PVC.

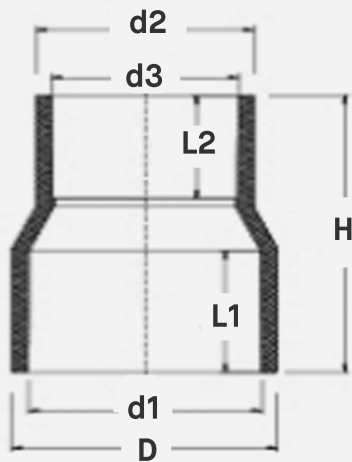

SKU	Size	D	d1	d2	d3	H	L1	L2
PVBC075-050	3/4" x 1/2"	1.32"	1.05"	1.08"	0.84"	2.12"	1.02"	0.73"
PVBC100-050	1" x 1/2"	1.61"	1.31"	1.08"	0.84"	2.11"	1.08"	0.75"
PVBC100-075	1" x 3/4"	1.61"	1.31"	1.32"	1.05"	2.52"	1.08"	1.00"
PVBC125-075	1-1/4" x 3/4"	1.97"	1.66"	1.32"	1.05"	2.54"	1.14"	1.02"
PVBC125-100	1-1/4" x 1"	1.97"	1.66"	1.61"	1.31"	2.65"	1.14"	1.08"
PVBC150-050	1-1/2" x 1/2"	2.23"	1.90"	1.08"	0.84"	2.57"	1.34"	0.75"
PVBC150-075	1-1/2" x 3/4"	2.23"	1.90"	1.32"	1.05"	2.85"	1.34"	1.02"
PVBC150-100	1-1/2" x 1"	2.23"	1.90"	1.61"	1.31"	2.91"	1.34"	1.08"
PVBC150-125	1-1/2" x 1-1/4"	2.23"	1.90"	1.97"	1.66"	2.93"	1.34"	1.14"
PVBC200-075	2" x 3/4"	2.72"	2.38"	1.32"	1.05"	3.26"	1.57"	1.02"
PVBC200-100	2" x 1"	2.72"	2.38"	1.61"	1.31"	3.32"	1.57"	1.08"
PVBC200-125	2" x 1-1/4"	2.72"	2.38"	1.97"	1.66"	3.38"	1.57"	1.14"
PVBC200-150	2" x 1-1/2"	2.72"	2.38"	2.23"	1.90"	3.58"	1.57"	1.34"