


# Schedule 40 PVC Ball Valve

(Solvent)

## FEATURES

- **PVC Construction** – Offers excellent durability, corrosion resistance, and cost-effectiveness.
- **Socket Connection** – Provides a secure and easy-to-install leak-free seal.
- **150 PSI at 73°F Pressure Rating** – For safe operation in moderate pressure conditions.
- **EPDM O-Ring** – Known for its resistance to heat, water, and steam, EPDM makes the O-ring longer lasting and more effective.
- **For Non-Potable Systems Only** – While not certified for potable water use, this product is suitable for a wide range of other applications where NSF certification is not required.
- **ISO-9002 Compliant**

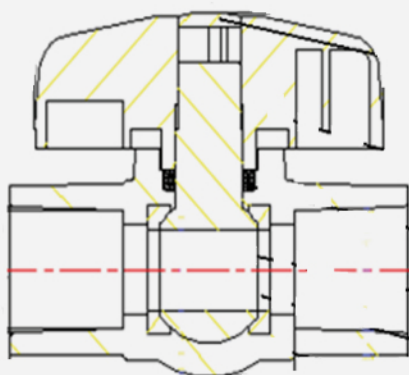

SKU	Size	Length	Width	Height
PVBVS050	1/2"	3.05"	1.56"	2.62"
PVBVS075	3/4"	3.46"	1.78"	3.07"
PVBVS100	1"	3.95"	2.19"	3.63"
PVBVS125	1-1/2"	4.35"	2.58"	3.96"
PVBVS150	1-3/4"	4.86"	2.93"	4.32"
PVBVS200	2"	5.59"	3.57"	5.27"
PVBVS250	2-1/2"	9.84"	4.47"	6.26"
PVBVS300	3"	11.69"	6.30"	7.13"
PVBVS400	4"	12.48"	7.24"	8.31"