


PVC In-Line Check Valve

FNPT x FNPT (Threaded)

FEATURES

- **Corrosion-resistant** – Comes with a stainless-steel, spring-loaded poppet for increased longevity
 - **Compatible** - Fits both schedule 40 and schedule 80 pipes
 - **Durable** – Included O-ring seal is rated at 200 PSI at 73°F
 - **ANSI B1.20.1**
- *Not for use with compressed air**

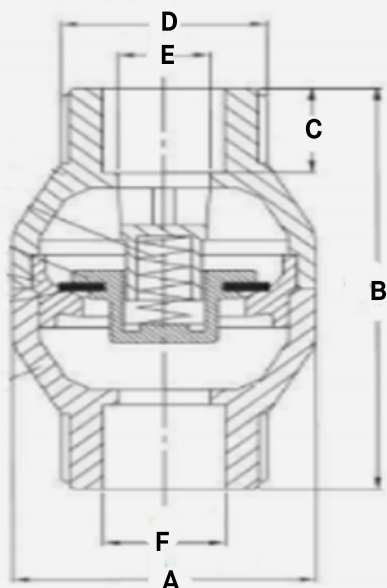

SKU	Size	A	B	C	D	E	F
PVCVT050	1/2"	2.268"	4.134"	0.698"	1.378"	0.689"	1/2" NPT
PVCVT075	3/4"	2.268"	4.134"	0.730"	1.378"	0.858"	3/4" NPT
PVCVT100	1"	2.866"	5.236"	0.895"	1.756"	1.110"	1" NPT
PVCVT125	1-1/4"	3.654"	6.181"	0.968"	2.047"	1.376"	1-1/4" NPT
PVCVT150	1-1/2"	3.654"	6.181"	1.104"	2.378"	1.614"	1-1/2" NPT
PVCVT200	2"	4.280"	7.000"	1.164"	2.920"	2.062"	2" NPT