

PEX Full Port Ball Valve w/ Drain

Lead Free


FEATURES

• **Lead Free** – Made from lead free C46500 brass alloy for safe use in commercial and residential jobs.

Built for Versatility – Rated for working pressures
from 20 PSI to 125 PSI and working temperatures
from 41°F to 160°F for effective use in a variety of systems

• Fully Compliant - Complies with ASME A112.18.1-2018/ CSA B125.1-18 standards for use in both the United States and Canada



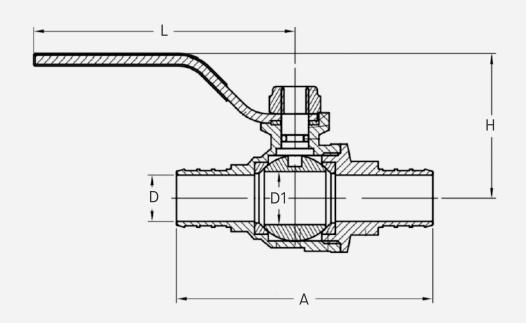

SKU	Size	D	D1	Α	н	L
PXBVD050	1/2"	0.35"	0.47"	2.60"	1.73"	2.83"
PXBVD075	3/4"	0.53"	0.55"	2.80"	1.81"	3.35"
PXBVD100	1"	0.71"	0.75"	3.31"	2.05"	4.17"