


PEX x 1/2" PEX Ball Valve, T-Handle

Lead Free

FEATURES

- **Lead Free** – Made from lead free C46500 brass alloy for safe use in commercial and residential jobs.
- **Built for Versatility** – Rated for working pressures from 20 PSI to 125 PSI and working temperatures from 41°F to 160°F for effective use in a variety of systems.
- **Fully Compliant** - Complies with ASME A112.18.1-2018/ CSA B125.1-18 standards for use in both the United States and Canada.

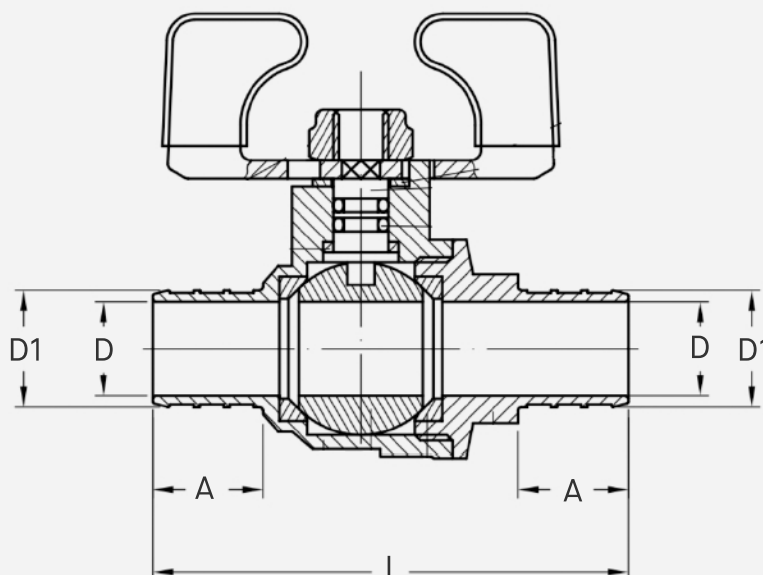

SKU	Size	D	D1	A	L
PXBVT050	1/2"	0.35"	0.47"	0.63"	2.48"
PXBVT075	3/4"	0.53"	0.67"	0.63"	2.68"
PXBVT100	1"	0.71"	0.85"	0.81"	3.27"