

PXCLTL-2 Heavy Duty PEX Ratchet Clamp & Cutting Tool

MODEL NO: PXCLTL-2




FEATURES

- One master cinch tool installs all sizes from 3/8" to 1" of Cinch Clamps.
- With a unique "tab" design, the Cinch Tool goes into those hard-to-reach spaces.
- Ratchet design releases only when the cinch clamp tab is properly pinched, thus ensuring a leak-proof connection.
- Meets ASTM F-2098 specifications.
- Compresses Stainless Steel Clamp Rings to secure PEX or PE-RT tubing to brass or poly crimp fittings.

NOTE: Do not use with Zurn® Quickclamp™ PEX crimp PEX crimp rings.

OPERATION

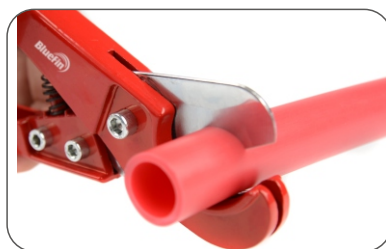

1. Cut PEX tubing squarely, leaving a clean, even edge. Remove burrs.



2. Slide PEX cinch clamp over tubing and insert fitting. Place cinch damp 1/8"-1/4"



3. Place PEX cinch clampnub between tool jaws and ratchet the clamp until the PEX Cinch Clamp Tool auto-releases.



4. Pressure test the PEX tubing and inspect before normal use. If there are any signs of leaks, repeat the total procedure.

CALIBRATION

No calibration needed for this tool.

Cinch the clamp

Switch the rotary knob and turn the numeric 1 to the red point



✓ **CINCHING**

Remove the clamp

Switch the rotary knob and turn the numeric 2 to the red point




✓ **REMOVING**

ADJUSTMENT NUT

IN THE EVENT OF A JAM, COMPRESS HANDLES TO RELIEVE PRESSURE ON RATCHET PULL RELEASE LEVER IN DIRECTION OF ARROW.

ECCENTRIC STUD

ROTATE COUNTER-CLOCKWISE TO INCREASE JAW GAP.

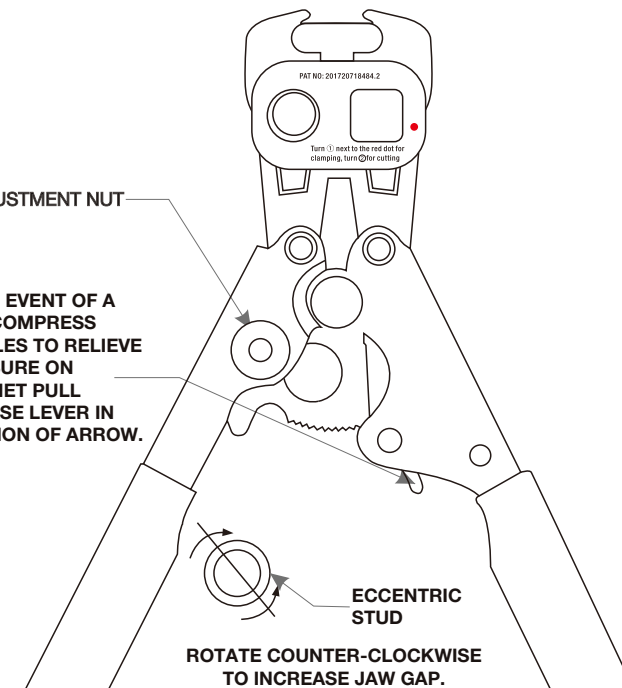

MODE 1 CINCHING



MODE 2 CUTTING



WARNING! This product contains chemicals including DEHP, which is known to the State of California to cause cancer and birth defects or other reproductive harm. **Wash hands after handling.** For more information, go to www.P65Warnings.ca.gov.