


Poly PEX Crimp Tee

FEATURES

- Material: Acudel 22000, Radel R-5100
- For use in hot and cold potable water distribution systems
- Max Temperature: 200°F
- NSF/ANSI Standard 14
- NSF/ANSI Standard 61
- NSF/ANSI Standard 372 (Low Lead)
- ASTM F2159
- ASTM F877
- CSA B137.5



SKU: PXLT038, PXLT050, PXLT075, PXLT100, PXLT050-050-075, PXLT075-050-050, PXLT075-050-075, PXLT075-075-050, PXLT075-075-100, PXLT100-075-075, PXLT100-075-100, PXLT100-100-050, PXLT100-100-075

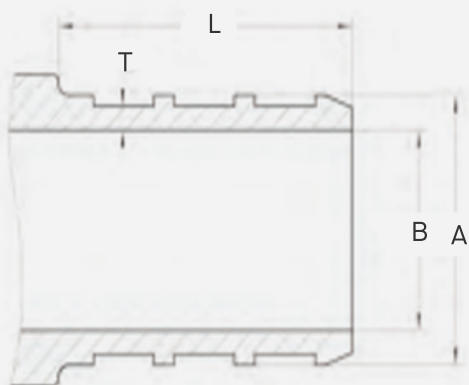

Size	A (Outside Diameter)	B (Minimum ID)	L (Insert Length)	T (Minimum Wall)
3/8"	0.347"	0.197"	0.70"	0.050"
1/2"	0.473"	0.315"	0.70"	0.056"
3/4"	0.668"	0.460"	0.70"	0.082"
1"	0.856"	0.610"	0.85"	0.100"