

PEX x NPT Brass Male Adapter


Lead Free



SKU: PXM125, PXM150

FEATURES

- Can be used with PEX tubing manufactured to ASTM Standard F876-877
- Manufactured to ASTM Standard F1807
- Material: C46500 Lead Free Brass
- NSF/ANSI Standard 14, NSF/ANSI Standard 61
- NSF/ANSI Standard 372 (Low Lead), SE, CSA B137.5

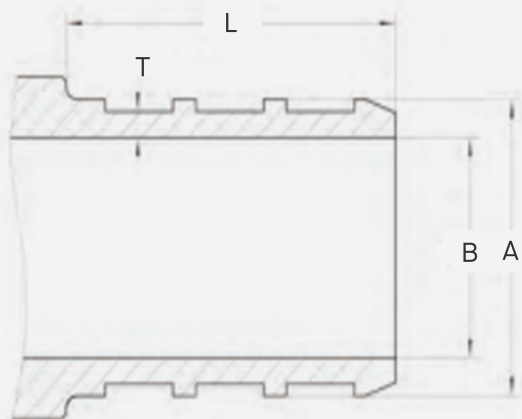

Insert for Fitting Size				
Size	A (Outside Diameter)	B (Minimum ID)	L (Minimum Insert Length)	T (Minimum Wall)
3/8"	0.345"	0.230"	0.625"	0.025"
1/2"	0.471"	0.350"	0.625"	0.028"
5/8"	0.570"	0.451"	0.625"	0.032"
3/4"	0.667"	0.530"	0.625"	0.037"
1"	0.856"	0.710"	0.795"	0.041"
1-1/4"	1.045"	0.870"	0.940"	0.045"