

PEX Crimp Frost Free Sillcock


Lead Free

DESCRIPTION

Bluefin Lead-Free, Frost-Free, Anti-Siphon Sillcocks connect PEX to a 3/4" female hose thread. This PEX sillcock can be used with either the stainless steel clamping system or the copper crimp ring system.

FEATURES

- **Brass Construction** – C46400 brass alloy includes tin for added corrosion resistance and excellent strength
- **Anti-Siphon Design** – protects the system against backflow
- **Rated for Durability** – Able to withstand a maximum operating temperature of 180°F at 125 PSI

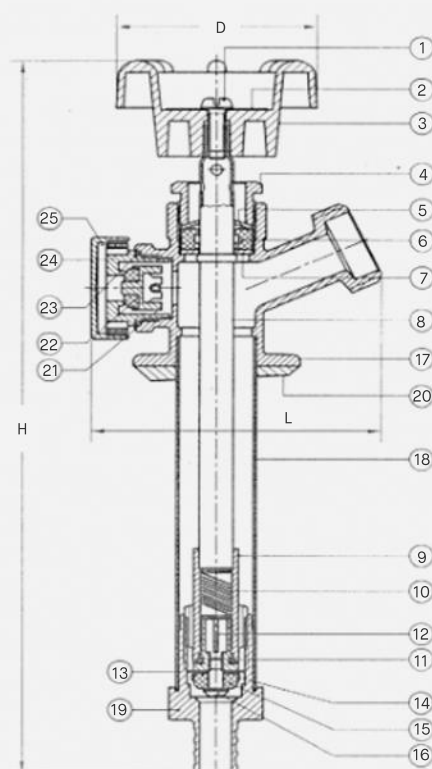

SKU	Size	Dimensions		
		D	H	L
PXSIL050-8AS	1/2" PEX x 3/4" MHT x 8"	2.20"	12.64"	3.07"
PXSIL050-10AS	1/2" PEX x 3/4" MHT x 10"	2.20"	14.65"	3.07"
PXSIL050-12AS	1/2" PEX x 3/4" MHT x 12"	2.20"	16.69"	3.07"

No.	Part	Material	Water Contact
1	Bolt	Forged Brass C26000	No
2	Name Plate	Aluminum A1100	No
3	Handle	Zinc (Z30A)	No
4	Bonnet	Brass Rod C37700	No
5	Washer	Stainless Steel 304	No
6	Packing	Rubber (NBR) SN-719F	Yes
7	Washer	Stainless Steel 304	Yes
8	Pipe	Brass (Copper Alloy Nos. 27000)	Yes
9	Stem	Brass Rod C46400	Yes
10	Spring	Stainless Steel .04	Yes
11	O-Ring	Rubber (NBR) SN-719F	Yes
12	Spring Seat	Brass Rod C46400	Yes
13	Flapper	Rubber (NBR) SN-719F	Yes
14	Seat	Forged Brass C26000	Yes
15	Seat Packing	Rubber (NBR) SN-819F	Yes
16	Screw	Forged Brass C26000	Yes
17	Body	Cast Brass C4640 MOD	Yes
18	Pipe	Brass (Copper Alloy Nos. 27000)	Yes
19	Nipple	Brass ROD C46400	Yes
20	Packing	POM M90 Formocon FM090 CF500P	No
21	Floating	POM M90 Formocon FM090 CF500P	Yes
22	Floating Packing	Rubber (NBR) SN-719F	Yes
23	O-Ring	Rubber (NBR) SN-719F	Yes
24	Packing	POM M90 Formocon FM090 CF500P	Yes
25	Cap	Brass ROD C37700	No