


Pex Crimp Tee

Lead Free Brass

FEATURES

- **Versatile** - PEX fitting can be used with a stainless-steel clamping system or a copper crimp ring system.
- **Durable** - Able to withstand a maximum temperature of 200°F and a maximum pressure of 200 PSI.
- **Lead-free** - The C46500 brass meets ASTM F1807 lead-free alloy for safe and effective use in commercial and residential jobs.

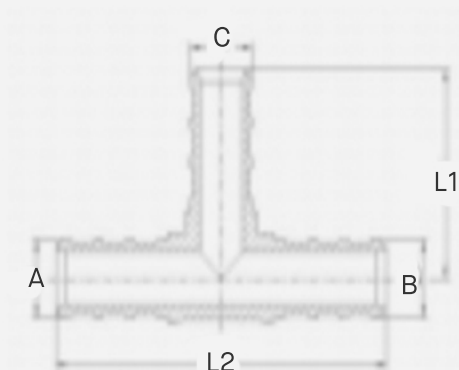

SKU	Size	A	B	C	L1	L2
PXT038	3/8"x3/8"x3/8"	.35"	.35"	.35"	.93"	1.85"
PXT050	1/2"x1/2"x1/2"	.47"	.47"	.47"	.94"	1.89"
PXT075	3/4"x3/4"x3/4"	.67"	.67"	.67"	1.06"	2.13"
PXT100	1"x1"x1"	.86"	.86"	.86"	1.34"	2.56"