


Tube Hanger w/ Nail

SPECIFICATION

- Preloaded ring shank nail
- Absorbs vibration
- High Density polyethylene, ultra-violet protected
- Impact resistant to 0°F
- Max Temp.: 160°F continuous, 185°F intermittent
- Safe working loads: 1/2": 12lbs, 3/4": 16lbs, 1": 24lbs

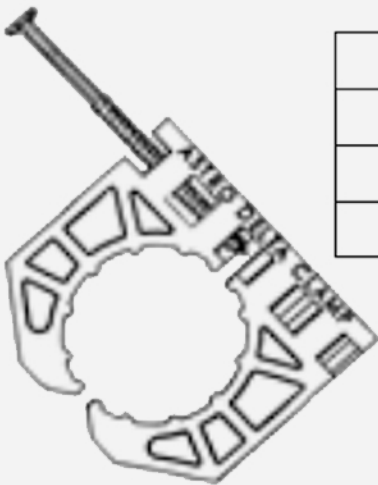

| SKU | SIZE | LENGTH | WIDTH | HEIGHT |
|---------|------|--------|-------|--------|
| PXTH050 | 1/2" | 1" | .374" | 2.46" |
| PXTH075 | 3/4" | 1.36" | .433" | 3.29" |
| PXTH100 | 1" | 1.65" | .491" | 3.94" |