


Brass Relief Valve (75 PSI)

Non-Adjustable (Lead Free)

FEATURES

- **Pressure Set Point:** 75 PSI
- **Brass Construction** – C46400 brass alloy includes tin for added corrosion resistance and excellent strength
- **Stainless Steel** – keeps spring and retaining screw resistant to rust and corrosion
- **Buna-N Sealing Disc** – ensures a watertight connection
- **Rated for Durability** - Able to withstand a maximum operating temperature of 180°F

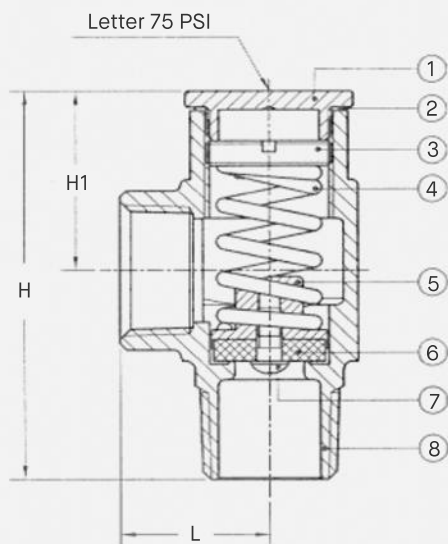

No	Parts	Materials	Water Contact
1	Bonnet	Brass Rod C46400	Yes
2	Packing	Fiber	Yes
3	Spring Cap	Brass Rod C46400	Yes
4	Spring	Stainless Steel 304	Yes
5	Seat House	Brass Rod C46400	Yes
6	Seat Packing	Rubber (NBR) SN-819F	Yes
7	Screw	Stainless Steel 304	Yes
8	Body	Cast Brass C46400 MOD	Yes

SKU	Nominal Size	Dimensions			Flow Rate GPM	Pressure Test PSI	Pressure Drop PSI	Cv
		H	H1	L				
RFV050-75	1/2" FIP x 1/2" FIP	2.45"	1.11"	0.97"	7.869	100	3	4.540
RFV075-75	3/4" FIP x 3/4" FIP	2.45"	1.11"	0.97"	8.020	100	3	4.628