


T304 Stainless Steel Reducer Coupling

FEATURES

- **Stainless Steel Construction** – durable yet flexible T304 stainless steel makes this product both reliable and easy to work with.
- **High Pressure Tolerance** – Carries a pressure rating of 150lbs.
- **Built for Versatility** – Rated for temperatures from -20°F to 150°F for effective use in a wide variety of systems.

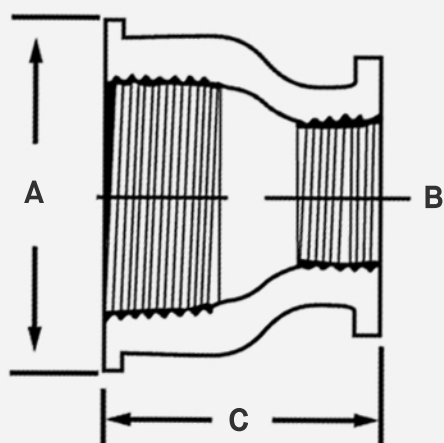

SKU	A	B	C
SLCG025-018	1/4"	1/8"	1.01"
SLCG038-025	3/8"	1/4"	1.12"
SLCG050-025	1/2"	1/4"	1.40"
SLCG050-038	1/2"	3/8"	1.40"
SLCG075-025	3/4"	1/4"	1.50"
SLCG075-038	3/4"	3/8"	1.50"
SLCG075-050	3/4"	1/2"	1.50"
SLCG100-025	1"	1/4"	1.61"
SLCG100-050	1"	1/2"	1.61"
SLCG100-075	1"	3/4"	1.61"
SLCG125-075	1-1/4"	3/4"	2.01"
SLCG125-100	1-1/4"	1"	2.01"
SLCG150-075	1-1/2"	3/4"	2.13"
SLCG150-100	1-1/2"	1"	2.13"
SLCG150-125	1-1/2"	1-1/4"	2.13"
SLCG200-075	2"	3/4"	2.52"
SLCG200-100	2"	1"	2.52"
SLCG200-125	2"	1-1/4"	2.52"
SLCG200-150	2"	1-1/2"	2.52"