


# Sweat Spring-Loaded Check Valve

Lead Free



## FEATURES

- **Brass Construction** –C46400 brass alloy includes tin for added corrosion resistance and excellent strength.
- **Rated for Durability** - Able to withstand a maximum operating temperature of 180°F and operating pressure of 200 PSI.

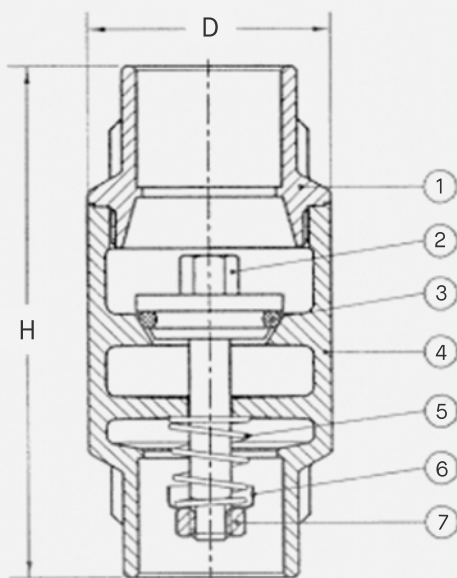

No	Parts	Materials	Water Contact
1	Nut	Stainless Steel 304	Yes
2	Spring Holder	Stainless Steel 304	Yes
3	Spring	Stainless Steel 304	Yes
4	Body	Cast Brass C46400 MOD	Yes
5	O-Ring	Rubber (NBR) SN-719F	Yes
6	Stem	Cast Brass C46400 MOD	Yes
7	Bonnet	Cast Brass C46400 MOD	Yes

SKU	Size	Dimension	
		D	H
SLCS050	1/2"	1.26"	2.77"
SLCS075	3/4"	1.50"	3.53"
SLCS100	1"	1.77"	4.08"
SLCS125	1-1/4"	2.17"	4.67"
SLCS150	1-1/2"	2.33"	4.92"
SLCS200	2"	3.05"	6.05"