

1/2" Push Fit Ball Valve x 3/4" FIP Braided Water Heater Connector, Lead Free (18" Length)


SKU: WHCB18BV-050PF-075F

APPLICATION

- Water supply for water heaters

FEATURES

- **Fully Compliant** – Meets cUPC, ASME A112.18.6-2017, CSA B125.6-17, and NSF/ANSI 14-2010a specifications for flexible water connectors
- **Lead Free** – Meets NSF/ANSI 61, and NSF372/ANSI 372 standards for use in commercial and residential lead-free drinking water systems

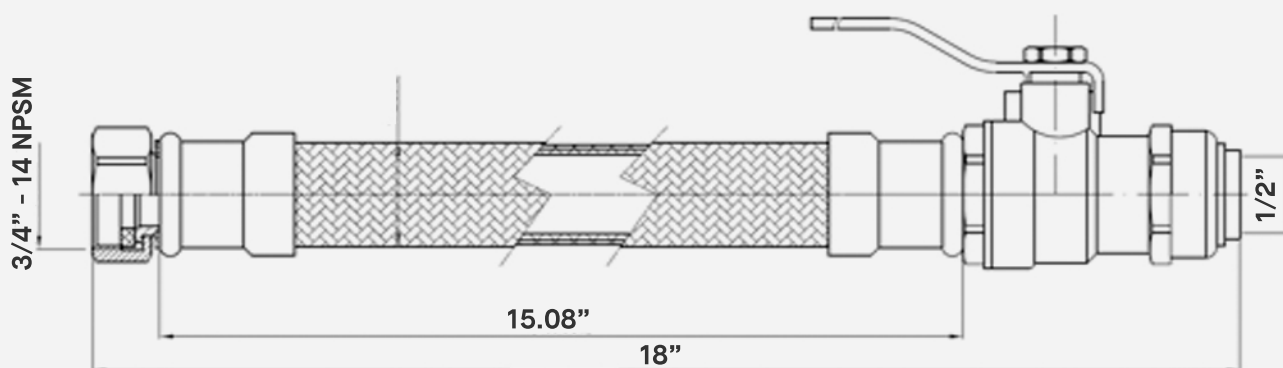

Connection	1/2" SharkBite x 3/4" FIP
Length	18"
Fittings	Rough brass
Sleeve	SS 304
Core	Two-layer NSF approved PVC and nylon braid between PVC layers
Outer	SS 304 Braided
Gasket	EPDM
Insert	Low lead brass
Maximum working pressure	125 PSI Continuous, 200 PSI Maximum
Working temperature	40°F - 150°F, intermittent to 180°F