


1/2" Push Fit x 3/4" FIP Braided Water Heater Connector, Lead Free (24" Length)

SKU: WHCB24-050PF-075F

FEATURES

- **Fully Compliant** – Meets cUPC, ASME A112.18.6-2017, CSA B125.6-17, and NSF/ANSI 14-2010a specifications for flexible water connectors
- **Lead Free** – Meets NSF/ANSI 61, and NSF372/ANSI 372 standards for use in commercial and residential lead-free drinking water systems

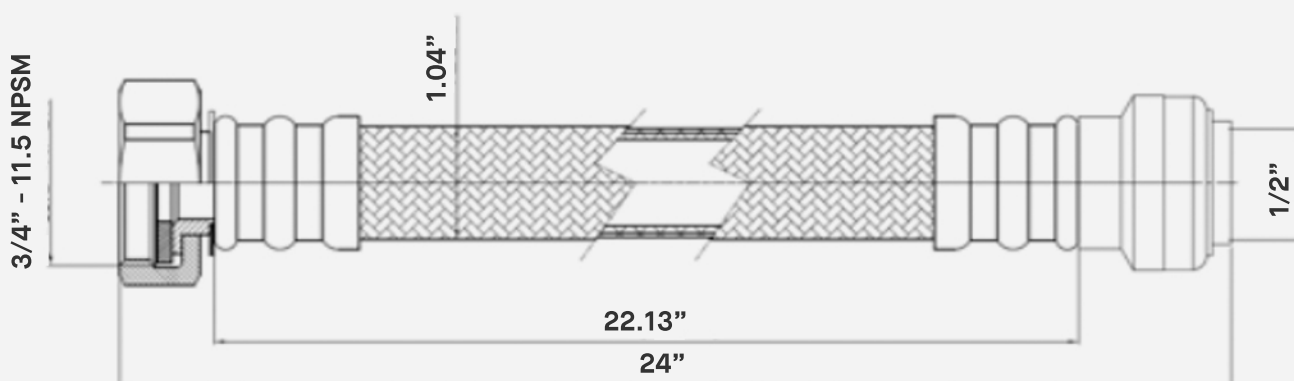

Connection	1/2" SharkBite x 3/4" FIP
Length	24"
Fittings	Rough Brass
Sleeve	SS 304
Core	Two-layer NSF Approved PVC and nylon braid between PVC layers
Outer	SS 304 Braided
Gasket	EPDM
Insert	Low lead brass
Working Pressure	125 PSI Continuous / 200 PSI Max
Working Temperature	40°F - 150°F intermittent to 180°F