


# 3/4" Push Fit x 3/4" FIP Corrugated Water Heater Connector, Lead Free (18" Length)

SKU: WHCC18-075PF-075F

## FEATURES

- **Fully Compliant** – Meets cUPC, ASME A112.18.6-2017, CSA B125.6-17, and NSF/ANSI 14-2010a specifications for flexible water connectors
- **Lead Free** – Meets NSF/ANSI 61, and NSF372/ANSI 372 standards for use in commercial and residential lead-free drinking water systems

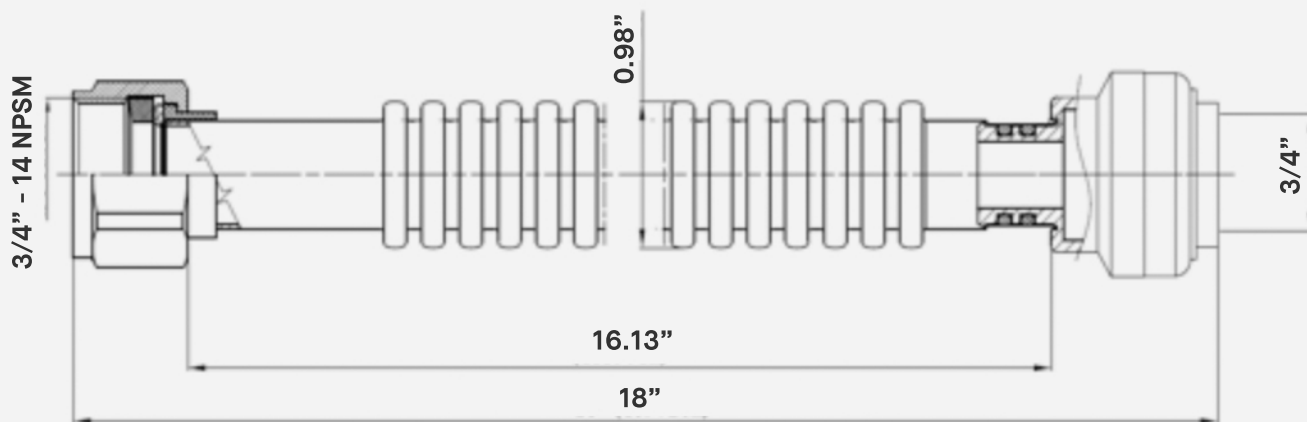

Connection	3/4" SharkBite x 3/4" FIP
Length	18"
Fittings	Chrome plated brass nut and rough brass push-fit
Sleeve	White POM
Body	Corrugated SS 304
Gasket	EPDM
Working pressure	125 PSI Continuous, 200 PSI Maximum
Working temperature	40°F - 150°F, intermittent to 180°F