



SKU: CPRV2-6

6 MFD Oval Motor Run Capacitor (370V)

Applications:
Designed for continuous-duty operation in residential and light-commercial HVAC equipment. Common applications include air conditioners, heat pumps, condenser fan motors, blower motors, refrigeration equipment, and other single-phase motor applications.

- Product Features:**
- Provides continuous operating support for single-phase motors
 - Oval housing for standard HVAC mounting applications
 - Available in a variety of capacitance ratings
 - Suitable for 370 VAC and 440 VAC applications, depending on model
 - Metallized polypropylene-film construction
 - Non-PCB dielectric material
 - Quick-connect terminals allow convenient installation
 - Individually tested for electrical performance


- Materials:**
- Corrosion-resistant aluminum housing
 - Metallized polypropylene-film dielectric
 - Moisture-resistant internal construction
 - Plated-metal quick-connect terminals
 - Molded thermoplastic terminal insulator
 - Internal pressure-interruption

- Certifications/Listings/Approvals:**
- UL listed
 - RoHs Compliant



Specification	Details
Operating Temperature	-40°F to 185°F
Voltage Range	370–440 VAC
Capacitance Range	3–120 µF
Capacitance Tolerance	±6%
Operating Frequency	50–60 Hz
Case Shape	Round
Termination	1/4" quick-disconnect terminals
Performance Specifications	Meets the requirements of EIA-456, UL 310, UL 810, CSA C22.2 No. 190, and RoHS

Product Offering & Dimension:

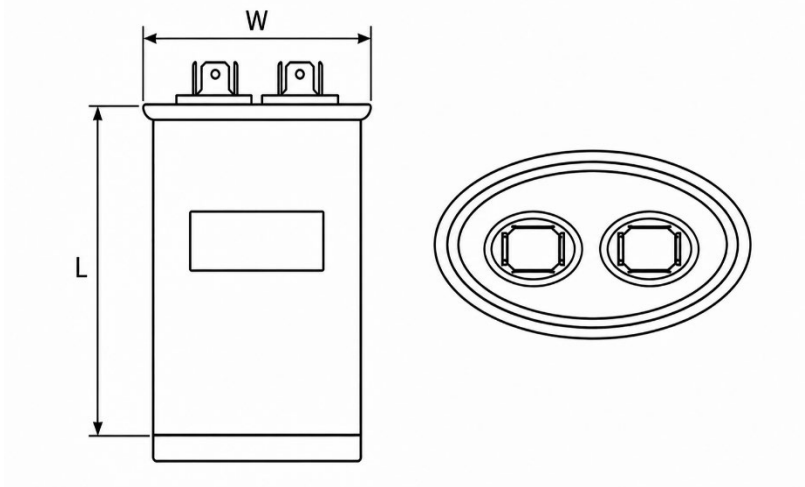

PART NO.	MFD	Voltage (v)	L (IN)	W (IN)	Weight (LBS)
CPRV1-5	5	440 / 370	2.165	1.238	0.16
CPRV1-7.5	7.5	440 / 370	2.165	1.238	0.16
CPRV1-10	10	440 / 370	2.559	1.238	0.19
CPRV1-12.5	12.5	440 / 370	2.559	1.238	0.19
CPRV1-15	15	440 / 370	2.024	1.238	0.262
CPRV2-6	6	370	2.024	1.238	0.185
CPRV2-15	15	370	2.024	1.238	0.222