

Horizontal Vent Kits

For Sidewall Venting Applications

Applications:

Draws fresh combustion air in from outside while simultaneously expelling flue gases from inside. Engineered for exterior vertical wall (*sidewall*) *mounting only*, delivering a clean exterior appearance with durable, outdoor-rated construction.

Approved for Category IV high-efficiency condensing appliances (furnaces and water heaters) per ULC S636 Class II. Available as HRZVNT02 (2" vent system) and HRZVNT03 (3" vent system) configurations for residential and light-commercial sidewall venting installations

Product Features:


- Compact, space-efficient horizontal design
- Hassle-free field installation
- Rust-resistant stainless steel fastening hardware included, along with wall anchors
- UV-stable materials rated for long-term outdoor exposure
- Clean exterior appearance with durable, outdoor-rated construction
- Compatible with approved Category IV condensing gas appliances
- Available as HRZVNT02 (2" vent) and HRZVNT03 (3" vent) to match appliance piping requirements
- Kit includes exterior vent cap, mounting plate, and mounting hardware

Materials:



- Mounting Hardware / Fasteners: Stainless steel
- Wall Anchors: Plastic
- Vent Cap / Housing: UV-stable, outdoor-rated material

Certifications/Listings/Approvals:



- Approved for Category IV high-efficiency condensing appliances per ULC S636 Class II

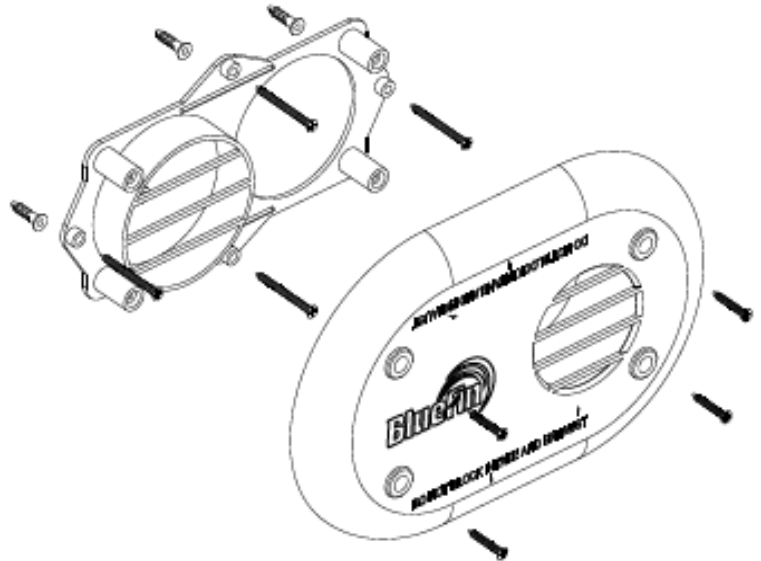


HORIZONTAL



VERTICAL



Dimensions:

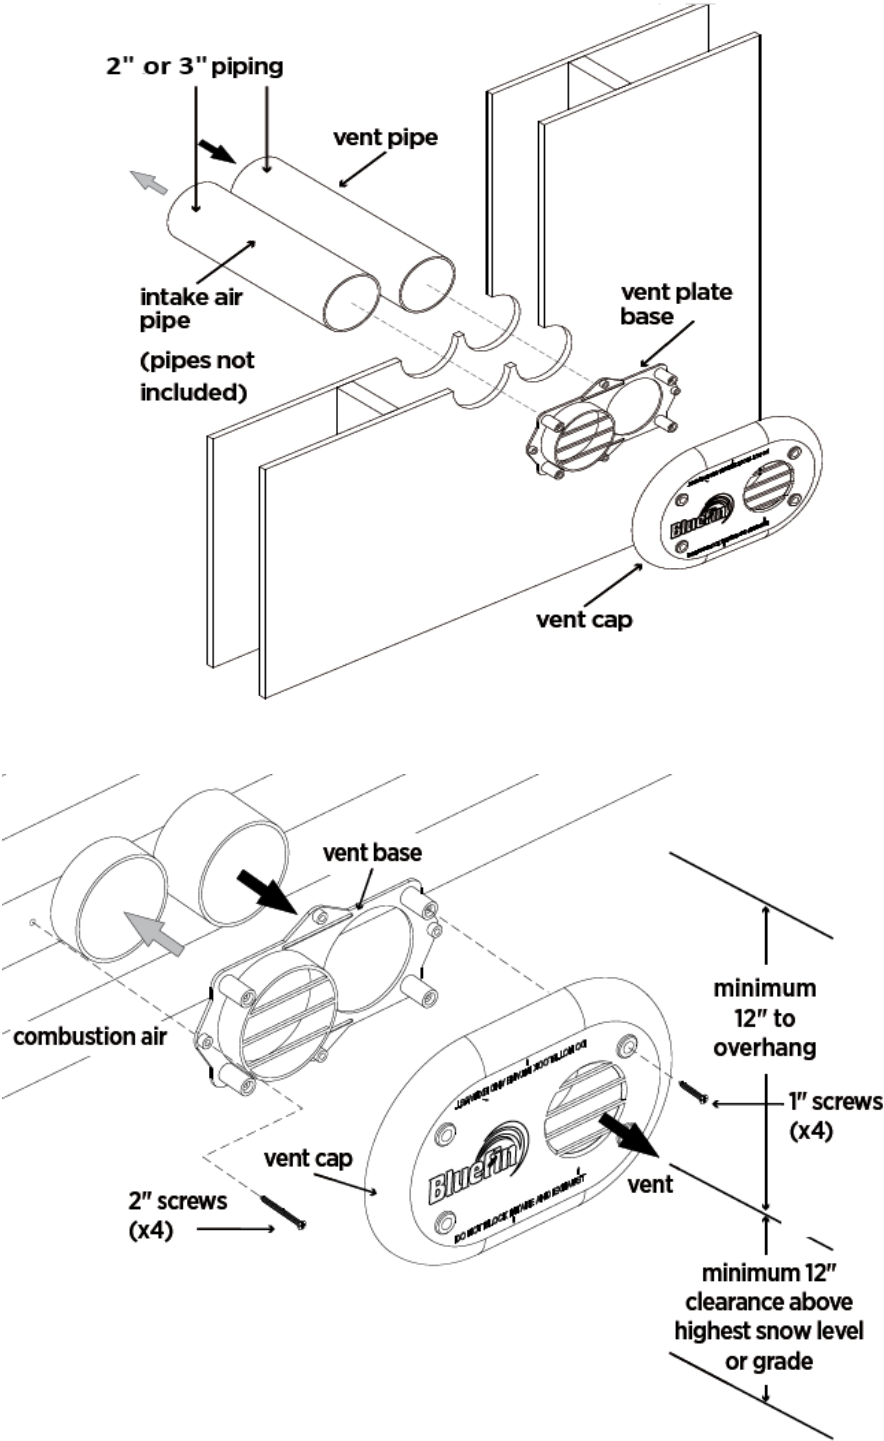

SKU	Height (IN)	Width (IN)	Length (IN)	Weight (oz)	Color
HRZVNT02	2.75	8.25	12.63	1.7	Ivory
HRVZNT03	2.75	8.25	12.63	1.7	Ivory