





# 14-(G)PPE SERIES PLEATED POLYESTER SEDIMENT CARTRIDGE

## Application:

- Pleated surface area provides greater sediment and dirt holding capacity while maintaining flow rate and reducing initial pressure drop
- Suitable for residential, commercial and industrial applications
- Cartridges can be cleaned and reused in most applications and micron ratings

## Specification:

- Max Temperature Rating: 140°F (60°C)
- Filter media: Polyester
- Filter core: Polypropylene
- Outer Netting: Polypropylene
- End Cap: Polypropylene with TPR Gasket

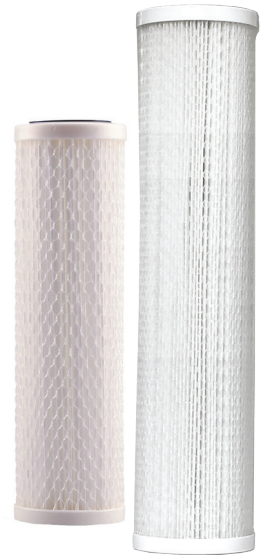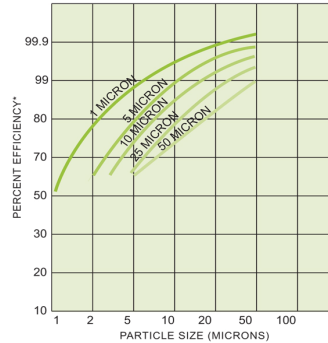

DIMENSIONS						
Part No.	Inner Diameter	Outer Diameter	Length	Micron	Flow Rate	Weight
	inches	inches	inches	Rating	PSI Drop @ GPM	grams
<b>STANARD</b>						
14-PPE1-01	1"	2-1/2"	9-3/4"	1	1 PSI @ 10 GPM	200
14-PPE1-05	1"	2-1/2"	9-3/4"	5	1 PSI @ 10 GPM	200
14-PPE1-05-2PK	1"	2-1/2"	9-3/4"	5	1 PSI @ 10 GPM	400
14-PPE1-10	1"	2-1/2"	9-3/4"	10	1 PSI @ 10 GPM	200
14-PPE1-20	1"	2-1/2"	9-3/4"	20	1 PSI @ 10 GPM	120
14-PPE1-20-2PK	1"	2-1/2"	9-3/4"	20	1 PSI @ 10 GPM	240
14-PPE1-50	1"	2-1/2"	9-3/4"	50	1 PSI @ 10 GPM	120
14-PPE2-05	1"	2-1/2"	20"	5	1 PSI @ 10 GPM	300
14-PPE2-20	1"	2-1/2"	20"	20	1 PSI @ 10 GPM	300
<b>GIANT</b>						
14-GPPE1-01	1"	4-1/2"	9-3/4"	1	1 PSI @ 10 GPM	290
14-GPPE1-05	1"	4-1/2"	9-3/4"	5	1 PSI @ 10 GPM	290
14-GPPE1-20	1"	4-1/2"	9-3/4"	20	1 PSI @ 10 GPM	290
14-GPPE1-50	1"	4-1/2"	9-3/4"	50	1 PSI @ 10 GPM	290
14-GPPE2-01	1"	4-1/2"	20"	1	1 PSI @ 20 GPM	600
14-GPPE2-05	1"	4-1/2"	20"	5	1 PSI @ 20 GPM	600
14-GPPE2-20	1"	4-1/2"	20"	20	1 PSI @ 20 GPM	600
14-GPPE2-50	1"	4-1/2"	20"	50	1 PSI @ 20 GPM	600

**Always Test Water** - Do not use this product with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the filtration system.

**Change Out** - Replacement filter cartridges have a limited service life. Changes in taste, colour and flow of the water (other liquid) being filtered are signals that replacement of the cartridge may be necessary.



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 519-595-4444 Fax: 519-595-4380 Toll Free: 800-561-3164

[www.boshart.com](http://www.boshart.com)