



A WATTS Brand

S19-460EFW, S19-465EFW

Deck-Mounted Hand-Held Hose Spray with Dual Sprayheads

- Complies with American National Standard Z358.1
- Acts as an Eye/Face Wash and Hand-Held Spray
- For Eyes and Face or Body Rinsing
- Highly Visible Yellow-Colored Hose
- Deck-Mounted Units
- Full, One-Year Warranty
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1

Specifications

Quick-access emergency eye/face spray features soft-flow dual sprayheads for flooding large areas as well as eyes only. Handle stays open once valve is squeezed. Hose is yellow reinforced thermoplastic. Unit is deck-mounted. Operating range is 30–90 psi. Flow rate: 3.9–5.9 gpm. Hand-held hose sprayhead contains an antimicrobial agent to protect the sprayhead.



This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.



Drench hoses must provide a controlled flushing fluid flow that is both tepid and non-injurious to the user per ANSI Z358.1. Refer to ANSI Z358.1 for complete regulatory information regarding the performance, installation, maintenance, and training requirements for drench hoses.



Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing codes. Contact Bradley or visit bradleycorp.com for available options.

Standard Equipment

Eye/Face Dual Sprayheads


Perforated sprayheads are ABS plastic and feature soft-flow dual sprayheads for flooding large areas as well as eyes only. Include protective sprayhead covers. Integral flow control assures safe, steady flow under varying water supply conditions.

Valve

Chrome-plated brass with extended handle stays open once handle is squeezed.

Drench Hose

8' (2438mm) yellow reinforced thermoplastic hose has 3/8" NPT male thread. Burst strength is 450 PSI.

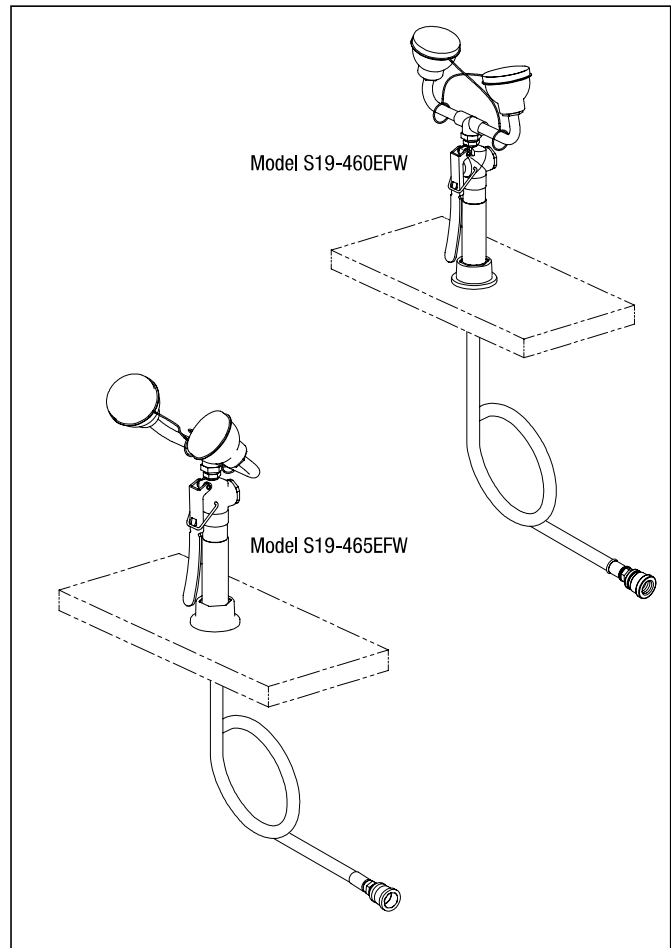


Model	Description
○ S19-460EFW	Deck-Mount Hand-Held Hose Spray with Dual Sprayheads
○ S19-465EFW	Deck-Mount Hand-Held Hose Spray with Dual Angled Sprayheads
○ S27-303	Series 7 Dual-Check Backflow Preventer
○ S45-2309	Series 9 Dual-Check Vacuum Breaker
○ S45-2310	Series 9D Dual-Check Backflow Preventer
○ S19-2000	Navigator EFX8 Emergency Thermostatic Mixing Valve

Recommended Option:

Navigator S19-2000 EFX8
Emergency Thermostatic Mixing Valve

NAVIGATOR



Satisfies ANSI Z358.1
tepid water requirements.

© 2024 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com




A WATTS Brand

S19-460EFW, S19-465EFW

Deck-Mounted Hand-Held Hose Spray with Dual Sprayheads

S19-460EFW

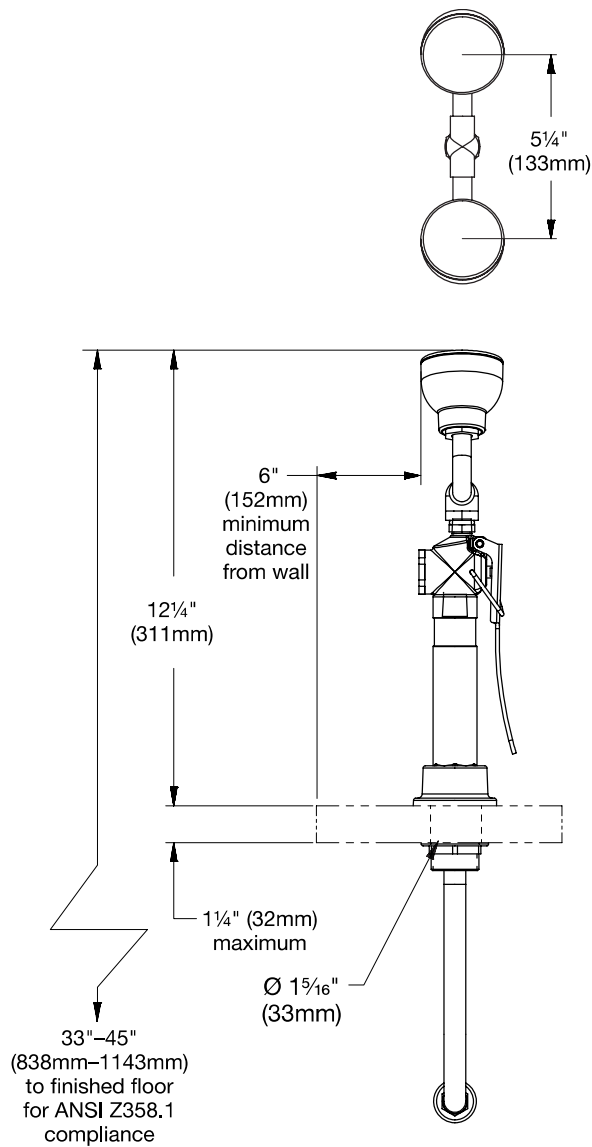

S19-465EFW

