

For Residential and Commercial Applications



Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

KTSCS40B 1/4 Turn Angle Ball Stop w/ 5" Extension & Loose Key – Sweat x Compression

Use: For use with water in accessible locations only

Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Precision-machined brass ball** is specially engineered and mated with PTFE seats to provide smooth operation without freeze ups even after long periods of non-use
- **TWO high-performance o-rings** withstand high temperatures and corrosion from harsh water environments
- **Brass body** provides strength, durability, and long-lasting performance
- **Brass stem** is assembled from the inside out with two o-rings to ensure safe, reliable performance
- **Plated stem** provides corrosion resistance and prevents o-ring damage after long periods of non-use
- **100% Leak tested**
- **✓ No Lead**

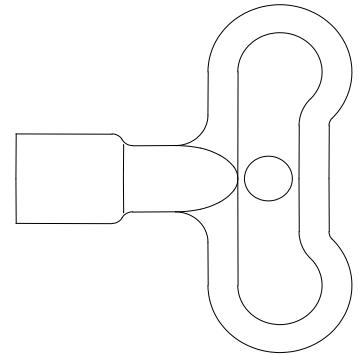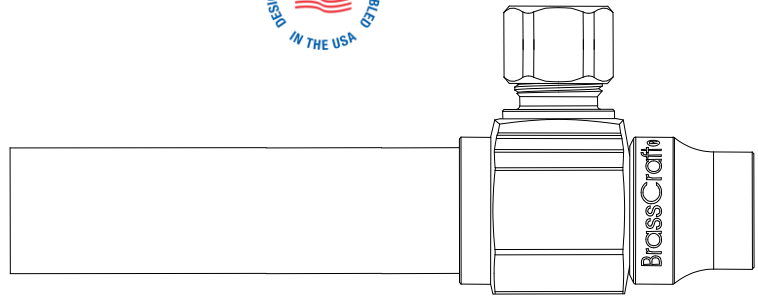

Operating Specifications:

Temperature: 40° - 180° F

Pressure: 125 PSI maximum

Standard

MATERIAL SPECIFICATIONS	
Body	Brass or brass, chrome plated
Stem	Brass, chrome plated
Handle	Zinc die cast, plated
Handle Screw	Steel, zinc plated
O-ring	Rubber
Ball	Brass, chrome plated
Seat	PTFE
Compression Sleeve	Brass
Compression Nut	Brass or brass, chrome plated
Extension Tube	Copper, chrome plated
Bell Escutcheon	Steel, chrome plated
Loose Key Adaptor	Zinc die cast
Loose Key	Zinc die cast

Compliant

MATERIAL SPECIFICATIONS	
Body	Compliant brass or compliant brass, chrome plated
Stem	Compliant brass, chrome plated
Handle	Zinc die cast, plated
Handle Screw	Steel, zinc plated
O-ring	Rubber
Ball	Compliant brass, chrome plated
Seat	PTFE
Compression Sleeve	Brass
Compression Nut	Brass or brass, chrome plated
Extension Tube	Copper, chrome plated
Bell Escutcheon	Steel, chrome plated
Loose Key Adaptor	Zinc die cast
Loose Key	Zinc die cast

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

BrassCraft®


KTSCS40B 1/4 Turn Angle Ball Stop w/ 5" Extension & Loose Key – Sweat x Compression

Standard Part Listing:

- ☐ KTSCS40B C 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome plated

Compliant Part Listing:

- ☐ KTSCS40BX C 1/2" nom sweat x 3/8" OD compression, bell escutcheon, chrome plated

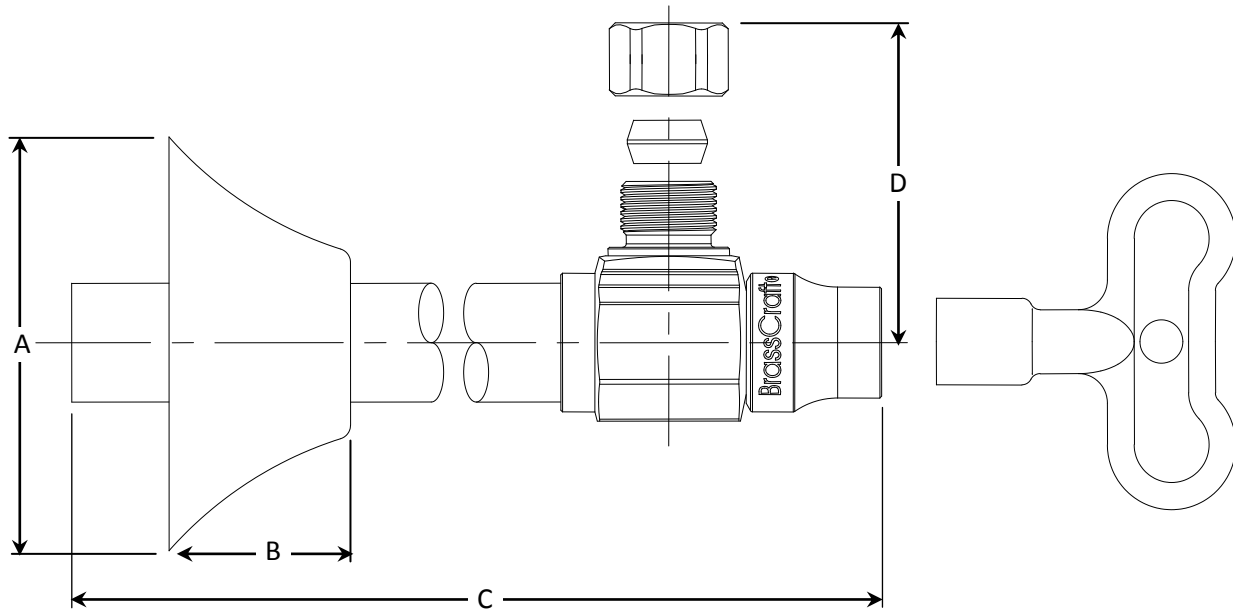

PART DIMENSIONS (Inches)				
Model	DIM A	DIM B	DIM C	DIM D
KTCS40	2.40	1.12	6.75	1.20

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- Compliant product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

BrassCraft®