

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

NSWRA Series CPVC Insert and Seal

Use: For use in potable water distribution systems to repair CPVC Solvent Weld water stops

Operating Specifications:


Temperature: 40° to 180°F
Pressure: 125 PSI maximum

MATERIAL SPECIFICATIONS

Insert	CPVC
Seal	Rubber


PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B
NSWRA1	.88	.62
NSWRA2	1.15	.88



Part Listing:

- ☐ NSWRA1 1/2" nominal CPVC insert and seal
- ☐ NSWRA2 3/4" nominal CPVC insert and seal

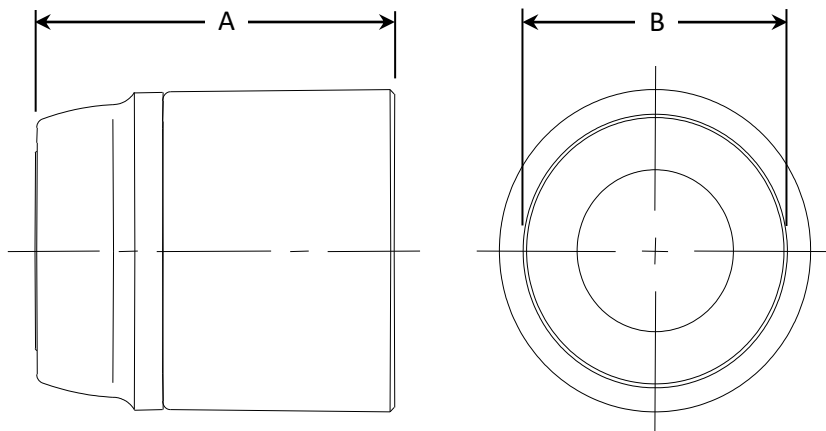

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.305 NSWRA Series CPVC Insert and Seal REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company