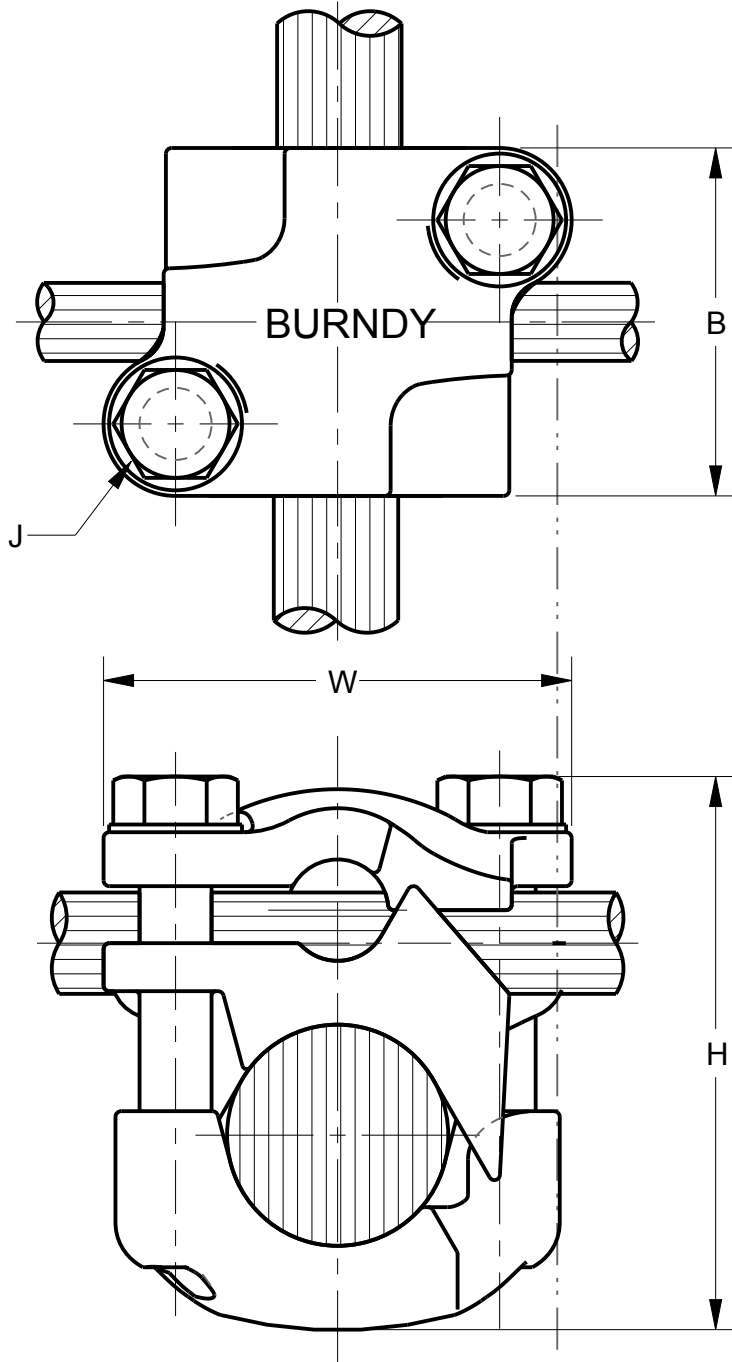
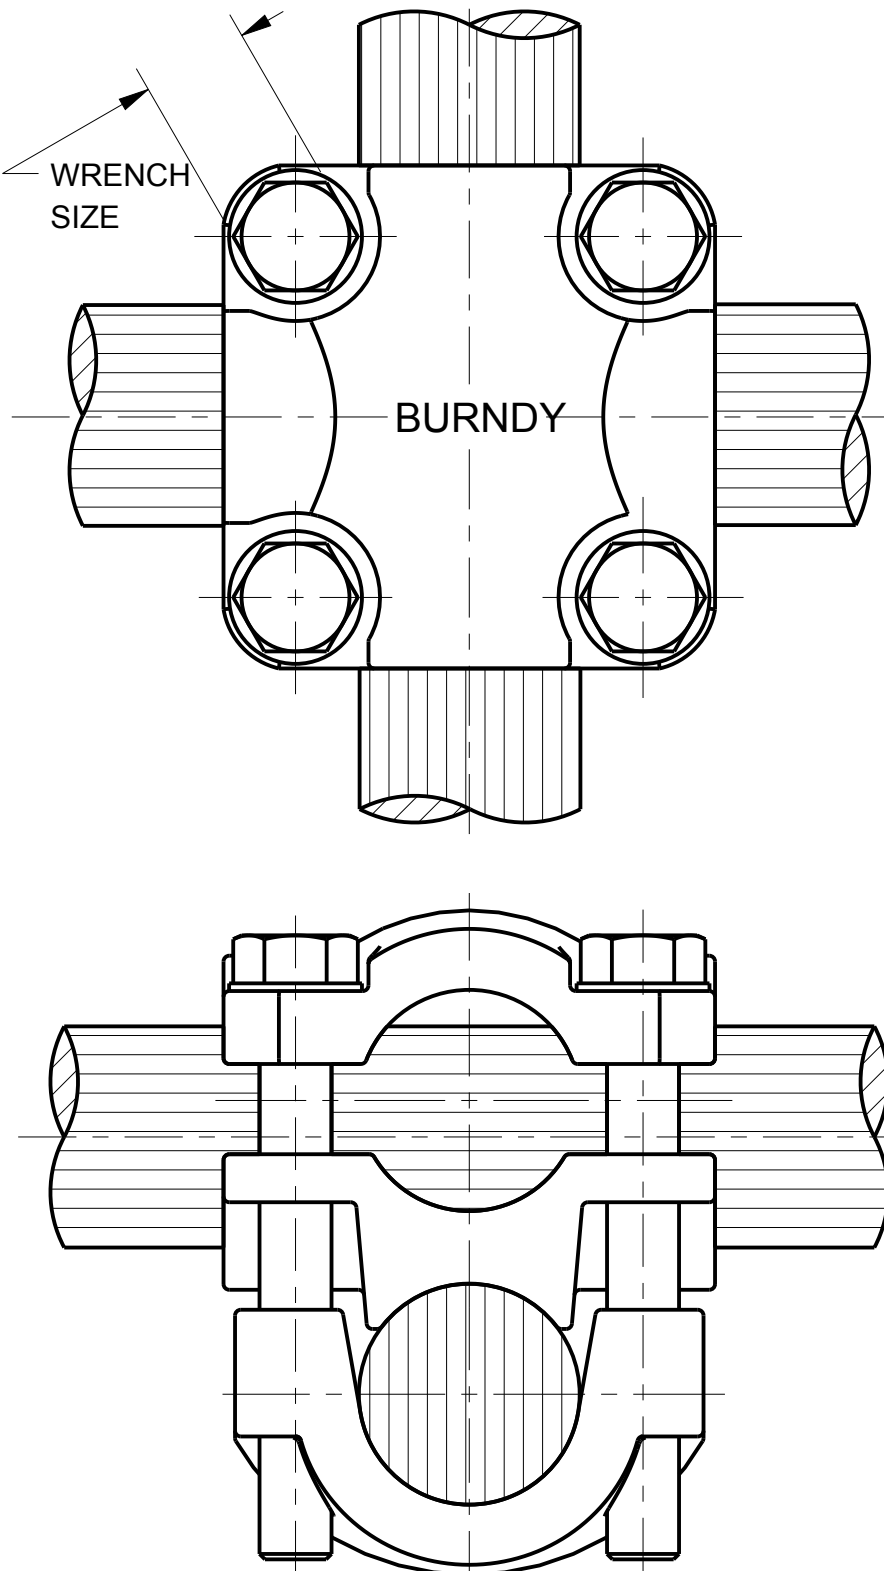
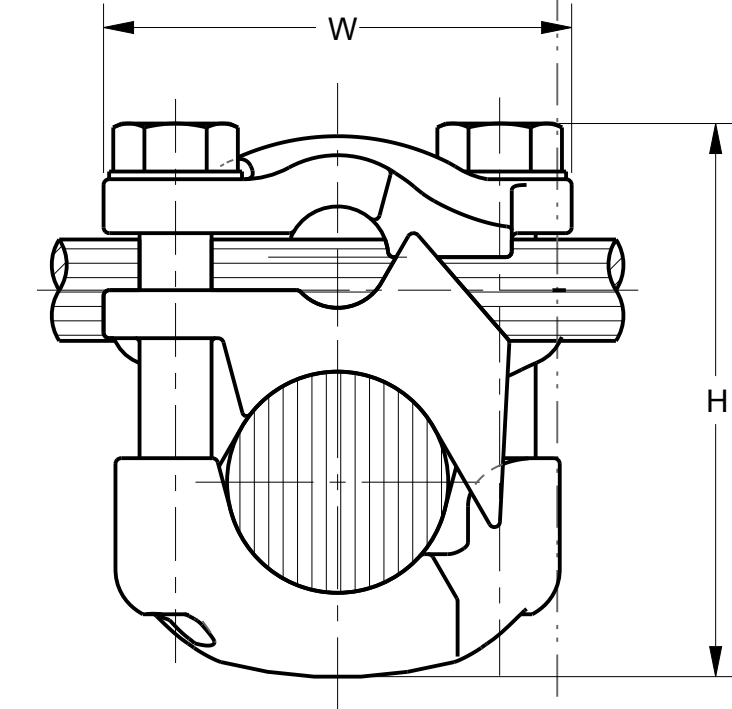
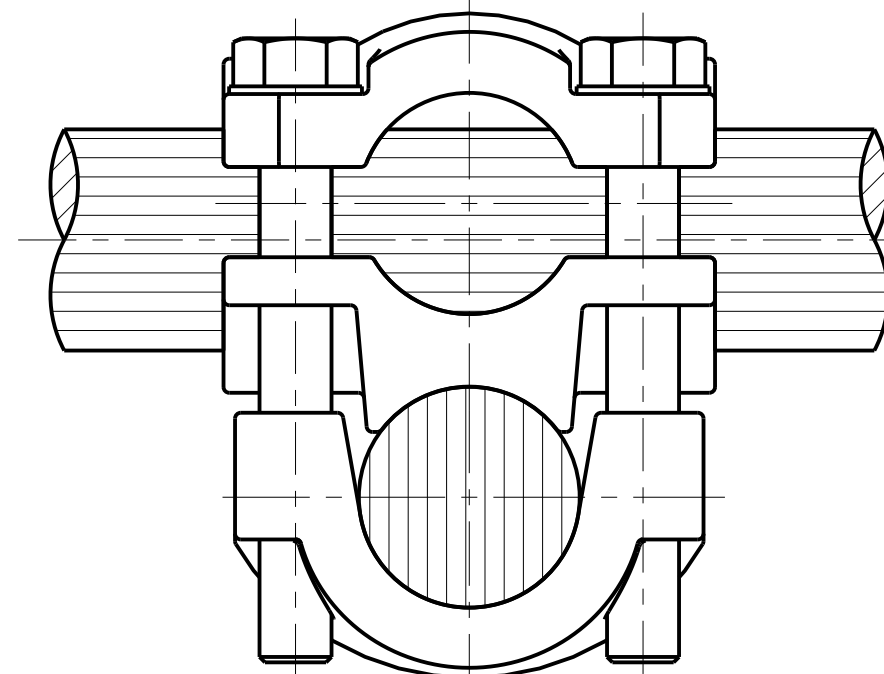
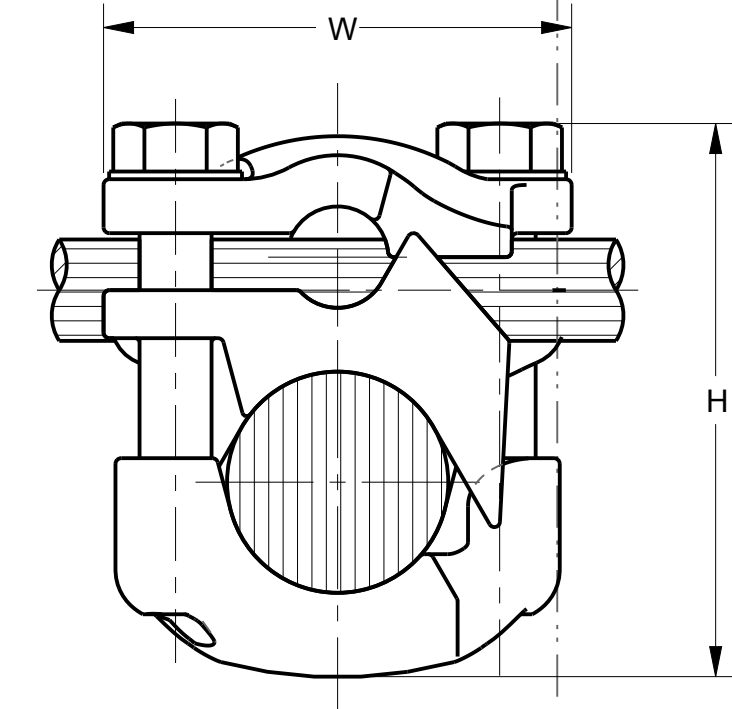
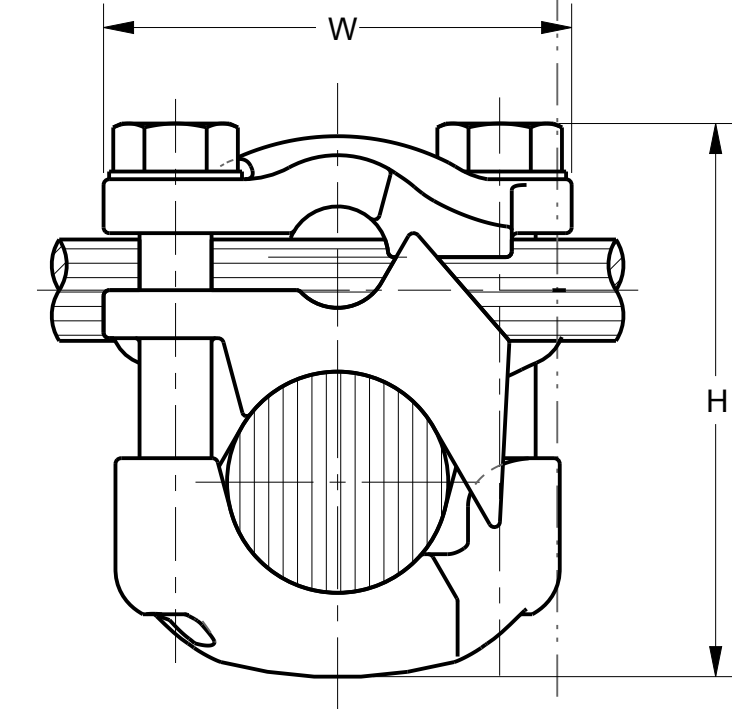
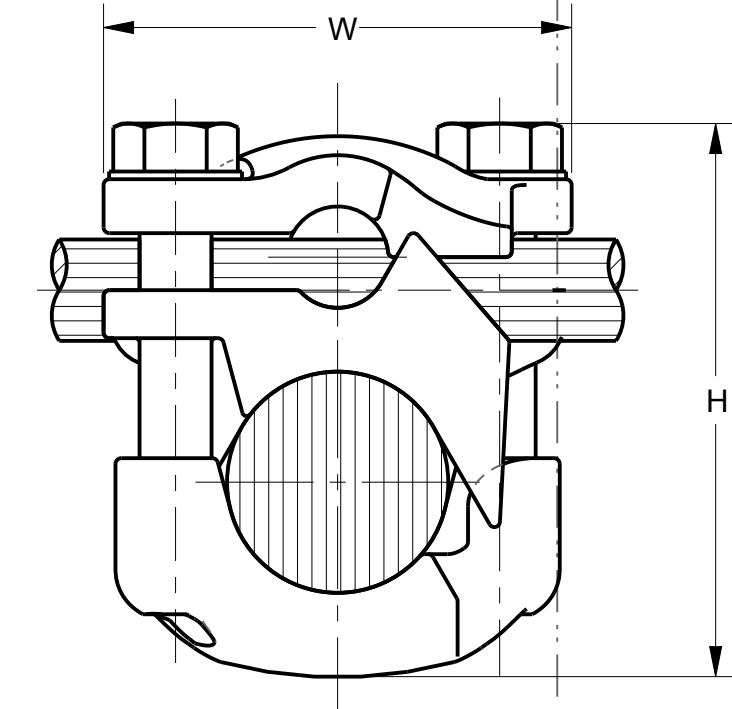
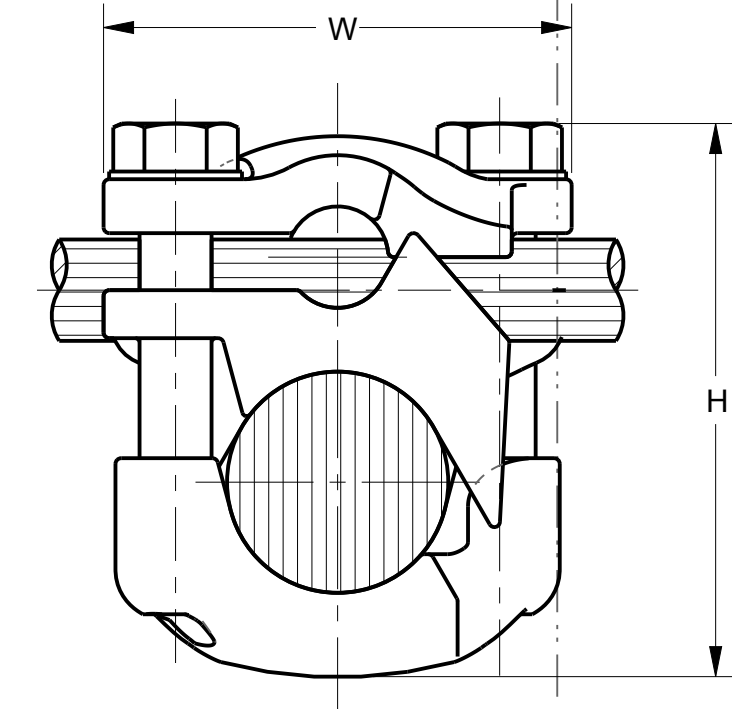


DRAWING NO. SA007887-01	4	3	2	1	REV	DATE	DESCRIPTION	ECO	BY	C'H'K.									
					C	09/10/2013 00:00:00 AM	ADD COLUMNS TO TABLE PER M/U.	31816	RLB	PL									
RUN		TAP		CATALOG NUMBER	FIG. NO.	DIMENSIONS IN INCHES				WRENCH SIZE (CROSSFLATS)	TORQUE IN-LB								
MIN.	MAX.	MIN.	MAX.			B	H MAX.	J	W										
D	400 kcmil	800 kcmil	#3 STR.	2/0 STR.	QPX4026	1	1.50 [38]	2.56 [65]	.312 [8]	2.31 [59]	1/2	180		TYP QPX-FIG.1					
	400 kcmil	800 kcmil	#1 STR.	4/0 STR.	QPX4028	1	1.81 [46]	2.75 [70]	.375 [10]	2.31 [59]	9/16	240							
	400 kcmil	800 kcmil	3/0 STR.	350 kcmil	QPX4031	1	1.94 [49]	2.81 [71]	.375 [10]	2.31 [59]	9/16	240							
	400 kcmil	800 kcmil	250 kcmil	500 kcmil	QPX4034	2	2.06 [52]	3.06 [78]	.375 [10]	2.31 [59]	9/16	240							
	400 kcmil	800 kcmil	400 kcmil	800 kcmil	QPX4040	2	2.31 [59]	3.19 [81]	.375 [10]	2.44 [62]	9/16	240							
C	500 kcmil	1000 kcmil	#8 SOL.	#4 STR.	QPX444C	1	1.38 [35]	2.44 [62]	.312 [8]	2.25 [57]	1/2	180		TYP QPX-FIG.2					
	500 kcmil	1000 kcmil	#6 STR.	#2 STR.	QPX442C	1	1.38 [35]	2.69 [68]	.312 [8]	2.22 [56]	1/2	180							
	500 kcmil	1000 kcmil	#3 STR.	2/0 STR.	QPX4426	1	1.50 [38]	2.69 [68]	.312 [8]	2.25 [57]	1/2	180							
	500 kcmil	1000 kcmil	#1 STR.	4/0 STR.	QPX4428	1	1.81 [46]	2.88 [73]	.375 [10]	2.44 [62]	9/16	240							
	500 kcmil	1000 kcmil	3/0 STR.	350 kcmil	QPX4431	1	1.94 [49]	3.06 [78]	.375 [10]	2.44 [62]	9/16	240							
B	500 kcmil	1000 kcmil	250 kcmil	500 kcmil	QPX4434	2	2.06 [52]	3.06 [78]	.375 [10]	2.44 [62]	9/16	240		TYP QPX-FIG.1					
	500 kcmil	1000 kcmil	400 kcmil	800 kcmil	QPX4440	2	2.31 [59]	3.44 [87]	.375 [10]	2.44 [62]	9/16	240							
	500 kcmil	1000 kcmil	500 kcmil	1000 kcmil	QPX4444	2	2.62 [67]	3.44 [87]	.375 [10]	2.56 [65]	9/16	240							
	850 kcmil	1500 kcmil	#8 SOL.	#4 STR.	QPX464C	1	1.38 [35]	2.94 [75]	.312 [8]	2.50 [64]	1/2	180							
	850 kcmil	1500 kcmil	#6 STR.	#2 STR.	QPX462C	1	1.38 [35]	3.06 [78]	.312 [8]	2.50 [64]	1/2	180							
A	850 kcmil	1500 kcmil	#3 STR.	2/0 STR.	QPX4626	1	1.50 [38]	3.06 [78]	.312 [8]	2.50 [64]	1/2	180		TYP QPX-FIG.2					
	850 kcmil	1500 kcmil	#1 STR.	4/0 STR.	QPX4628	1	1.81 [46]	3.31 [84]	.375 [10]	2.69 [68]	9/16	240							
	850 kcmil	1500 kcmil	3/0 STR.	350 kcmil	QPX4631	1	1.94 [49]	3.38 [86]	.375 [10]	2.69 [68]	9/16	240							
	850 kcmil	1500 kcmil	250 kcmil	500 kcmil	QPX4634	2	2.06 [52]	3.38 [86]	.375 [10]	2.69 [68]	9/16	240							
	850 kcmil	1500 kcmil	400 kcmil	800 kcmil	QPX4640	2	2.31 [59]	3.69 [94]	.375 [10]	2.69 [68]	9/16	240							
	850 kcmil	1500 kcmil	500 kcmil	1000 kcmil	QPX4644	2	2.44 [62]	3.88 [99]	.375 [10]	2.69 [68]	9/16	240		TYP QPX-FIG.1					
	850 kcmil	1500 kcmil	850 kcmil	1500 kcmil	QPX4646	2	3.19 [81]	4.56 [116]	.500 [13]	3.31 [84]	3/4	480							
	1200 kcmil	2000 kcmil	#8 SOL.	#4 STR.	QPX484C	1	1.38 [35]	3.00 [76]	.312 [8]	2.75 [70]	1/2	180							
	1200 kcmil	2000 kcmil	#6 STR.	#2 STR.	QPX482C	1	1.38 [35]	3.06 [78]	.312 [8]	2.75 [70]	1/2	180							
	1200 kcmil	2000 kcmil	#3 STR.	2/0 STR.	QPX4826	1	1.50 [38]	3.25 [83]	.312 [8]	2.75 [70]	1/2	180							
	1200 kcmil	2000 kcmil	#1 STR.	4/0 STR.	QPX4828	1	1.81 [46]	3.25 [83]	.375 [10]	2.94 [75]	9/16	240		TYP QPX-FIG.1					
	1200 kcmil	2000 kcmil	3/0 STR.	350 kcmil	QPX4831	1	1.94 [49]	3.50 [89]	.375 [10]	2.94 [75]	9/16	240							
	1200 kcmil	2000 kcmil	250 kcmil	500 kcmil	QPX4834	2	2.06 [52]	3.56 [90]	.375 [10]	2.94 [75]	9/16	240							
	1200 kcmil	2000 kcmil	400 kcmil	800 kcmil	QPX4840	2	2.31 [59]	3.75 [95]	.375 [10]	2.94 [75]	9/16	240							
	1200 kcmil	2000 kcmil	500 kcmil	1000 kcmil	QPX4844	2	2.44 [62]	4.25 [108]	.375 [10]	2.94 [75]	9/16	240							
	1200 kcmil	2000 kcmil	850 kcmil	1500 kcmil	QPX4846	2	3.06 [78]	4.38 [111]	.500 [13]	3.31 [84]	3/4	480		TYP QPX-FIG.1					
	1200 kcmil	2000 kcmil	1200 kcmil	2000 kcmil	QPX4848	2	3.31 [84]	4.75 [121]	.500 [13]	3.31 [84]	3/4	480							
	# 6 STR.	# 2 STR.	# 6 STR.	# 2 STR.	QPX2C2C	1	1.31 [33]	1.50 [38]	.312 [8]	1.38 [35]	1/2	180							
	# 1 STR.	4/0 STR.	# 6 STR.	# 2 STR.	QPX282C	1	1.31 [33]	2.06 [52]	.312 [8]	1.56 [40]	1/2	180							
	# 1 STR.	4/0 STR.	# 1 STR.	4/0 STR.	QPX2828	1	1.81 [46]	2.38 [60]	.375 [10]	1.81 [46]	9/16	240							
	250 kcmil	500 kcmil	# 6 STR.	# 2 STR.	QPX342C	1	1.38 [35]	2.38 [60]	.312 [8]	1.88 [48]	1/2	180		TYP QPX-FIG.1					
	250 kcmil	500 kcmil	# 1 STR.	4/0 STR.	QPX3428	1	1.75 [45]	2.75 [70]	.375 [10]	2.06 [52]	9/16	240							
	250 kcmil	500 kcmil	250 kcmil	500 kcmil	QPX3434	2	2.06 [52]	3.00 [76]	.375 [10]	2.19 [56]	9/16	240							
4				3				2				1							

VERSITAP

TYPE QPX

FOR RANGE OF COPPER CABLES

PATENTED

AN EXTREMELY VERSATILE CONNECTOR FOR JOINING COMBINATIONS OF CABLE SIZES. THE VERSITAP MAY BE USED TO MAKE PARALLEL TAPS, T-CONNECTIONS, CROSS-CONNECTIONS OR END-TO-END CONNECTIONS. ONLY TEN CONNECTORS ARE REQUIRED TO MAKE ANY OF THESE CONNECTIONS TO CABLE SIZES #6 STR. TO 1000 kcmil. THE CURRENT CARRYING CENTER PLATE IS MADE OF HIGH CONDUCTIVITY COPPER ALLOY; THE TWO OUTER CLAMPING PLATES ARE MADE OF HIGH STRENGTH COPPER ALLOY. THE ENTIRE ASSEMBLY IS CLAMPED TOGETHER BY HIGH STRENGTH DURIUM™CAP SCREWS. ALL EDGES ARE ROUNDED FOR EASY TAPING.

NOTES:

1. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY® PRODUCTS CALL

UNITED STATES:
1-800-346-4175 (LONDONDERRY, NH)

CANADA:
1-800-361-6975 (QUEBEC)
1-800-387-6487 (ALL OTHER PROVINCES)

FOR PRODUCT INFO: <http://www.burndy.com>

VERSITAP™

ITEM NO: 374575

CAT. NO: QPX (GEN'L.)

DRAWN BY: B.K	3.31.50
CHECKER: --	--
DSN APPVL: --	--
MFG APPVL: --	--
QA APPVL: --	--
MKT APPVL: --	--

PROD FAM: --	SCALE: 1:1
PROJECT #: --	DRAWING NO
DOCUMENT TYPE: Sales	SA007887-01
REL LEVEL: Released	SHEET 1 OF 1

C

D

C

B


A

D


C

B

A

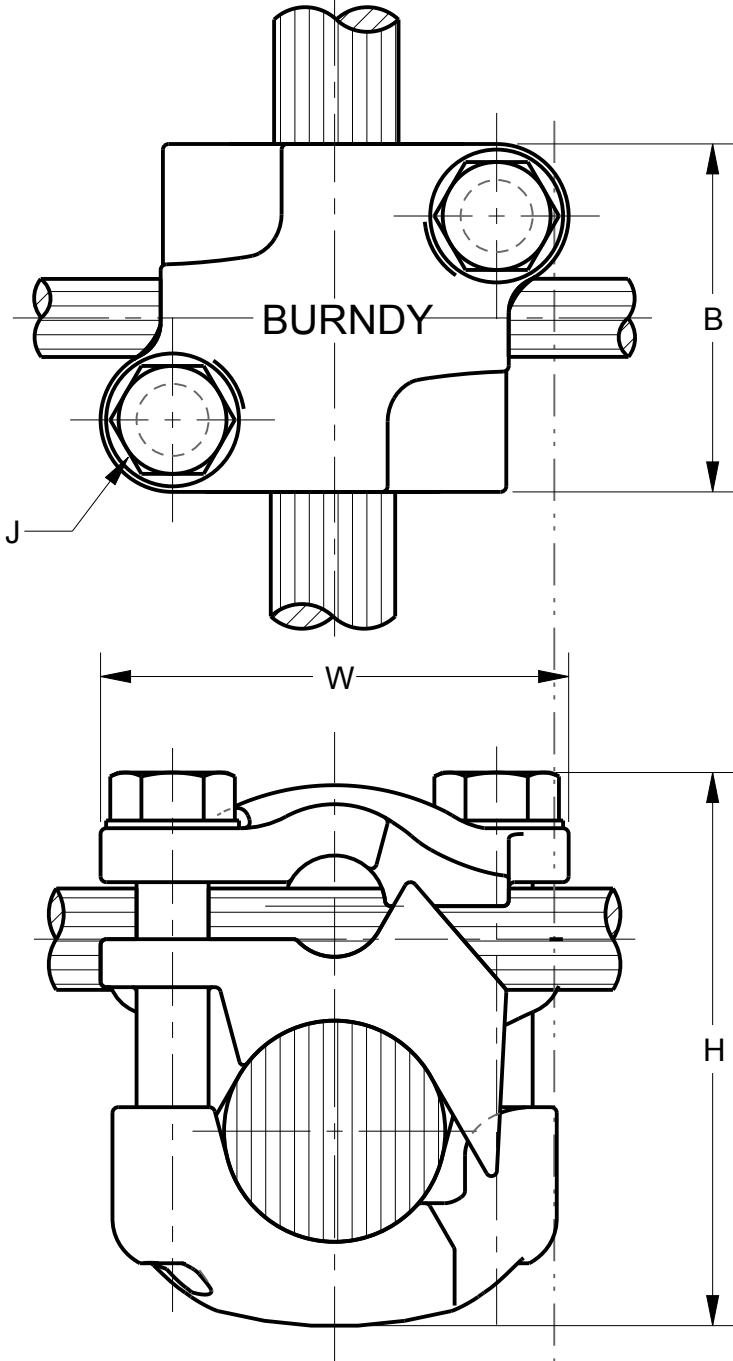

TYP QPX-FIG.1

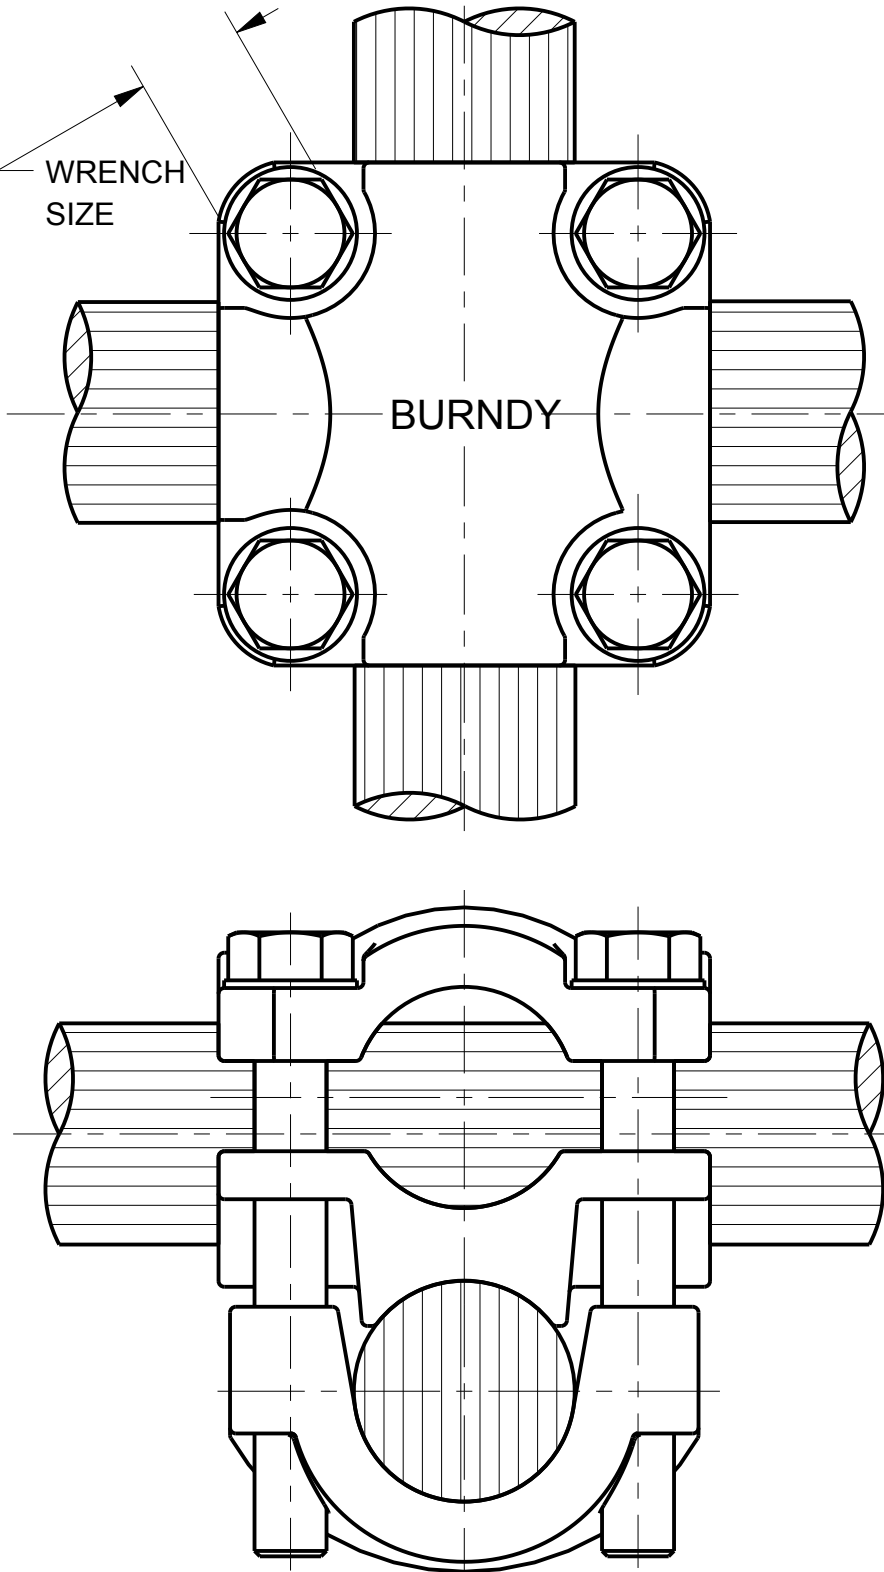

TYP QPX-FIG.2

VERSITAP

TYPE QPX

FOR RANGE OF COPPER CABLES

PATENTED

AN EXTREMELY VERSATILE CONNECTOR FOR JOINING COMBINATIONS OF CABLE SIZES. THE VERSITAP MAY BE USED TO MAKE PARALLEL TAPS, T-CONNECTIONS, CROSS-CONNECTIONS OR END-TO-END CONNECTIONS. ONLY TEN CONNECTORS ARE REQUIRED TO MAKE ANY OF THESE CONNECTIONS TO CABLE SIZES #6 STR. TO 1000 kcmil. THE CURRENT CARRYING CENTER PLATE IS MADE OF HIGH CONDUCTIVITY COPPER ALLOY; THE TWO OUTER CLAMPING PLATES ARE MADE OF HIGH STRENGTH COPPER ALLOY. THE ENTIRE ASSEMBLY IS CLAMPED TOGETHER BY HIGH STRENGTH DURIUM™CAP SCREWS. ALL EDGES ARE ROUNDED FOR EASY TAPING.

NOTES:

1. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY® PRODUCTS CALL				VERSITAP™			
UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH)				ITEM NO:	374575		
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)				CAT. NO:	QPX (GEN'L.)		
FOR PRODUCT INFO: http://www.burndy.com				DRAWN BY:	B.K	3.31.50	
				CHECKER:	--	--	
				DSN APPVL:	--	--	
				MFG APPVL:	--	--	
				QA APPVL:	--	--	
				MKT APPVL:	--	--	SCALE: 1:1 DRAWING NO REV SA007887-01 SHEET 1 OF 1
				PROD FAM:	--	--	
				PROJECT #:	--	SIZE	
				DOCUMENT TYPE:	Sales	C	
				REL LEVEL:	Released	--	C