


6-1/2" Diameter Stock Motors

56 Frame Vertical Condenser Fan Continuous Duty, Air Over

Features:

- Auto Protector
- Class B Moisture-Resistant Insulation
- Double Sealed Ball Bearing
- Permanent Split Capacitor
- Positioning Lugs for easy Belly-Band Mounting
- Quick-Connect Design
- Reversible
- Service Factor 1.0
- 5/8" Dia. Shaft with both Keyway and Flat
- 60°C Ambient
- 60 Hz
- 1" (Minimum) Extended Thru Bol

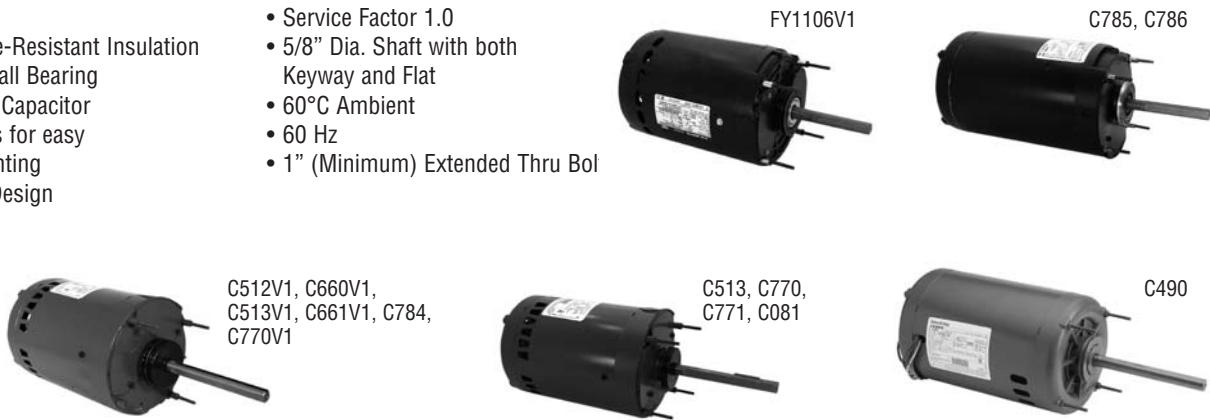

PERMANENT SPLIT CAPACITOR - ELECTRICALLY REVERSIBLE

HP	RPM	Volts	Amps	Stock Number	Capacitor	Ring to Ring Dimension	Dim. Ref.	Notes
3/4		460/200-230	1.7/3.5-3.4	C512V1	15MFD-370V	10.31	1	58
		115/208-230	6.6/4.0-3.3	C784	15MFD-370V	10.30	1	58
	1075	460/200-230	1.25/2.6-2.5	C513V1	10MFD-370V	9.81	2	58
	825	460/200-230	2.6/5.3-5.2	C660V1	15MFD-370V	10.81	3	58
	1075	460/200-230	1.9/4.0-3.8	C661V1	15MFD-370V	9.81	2	58
1	825	460/200-230	3.4/7.2-6.8	C490	12.5MFD-370V	11.05	4	31,58,265
	1075	460/200-230	2.4/4.8	C770	25MFD-370V		1	
		460/200-230	2.4/4.8	C770V1	25MFD-370V	10.31	1	58
		208-230/460	4.2/2.3	C785	25MFD-440V	10.80	3	31,58,118
		200-230/460	5.0/2.5	FY1106V1	20MFD-370V	9.84	2	6,58
		575	2.2	C081	25MFD-370V		3	
1-1/2	1075	460/200-230	3.3/6.6	C771	25MFD-370V		5	
		208-230/460	6.6/3.3	C786	25MFD-370V	11.60	5	31,58,118

Notes:
6. 60/50 HZ
31. 40 degree C ambient
58. Supplied with resilient mounting rings
118. TEAO
265. 50-inch leads, 2-1/2" resilient rings

Approximate Dimensions

Ref.	BM	C	N	Y
1	10.75	16.81	6.00	1.00
2	10.31	16.31	6.00	1.00
3	11.31	17.31	6.00	1.00
4	11.50	17.50	6.00	1.25
5	12.06	18.06	6.00	1.00

Motors shipped with thru bolts out shaft end may be reversed for vertical mount.

