




## QuickSetter+™ BALANCING VALVE WITH FLOWMETER

**CALEFFI**  
Hydronic Solutions



Plumbing

Protecting the system to protect your water

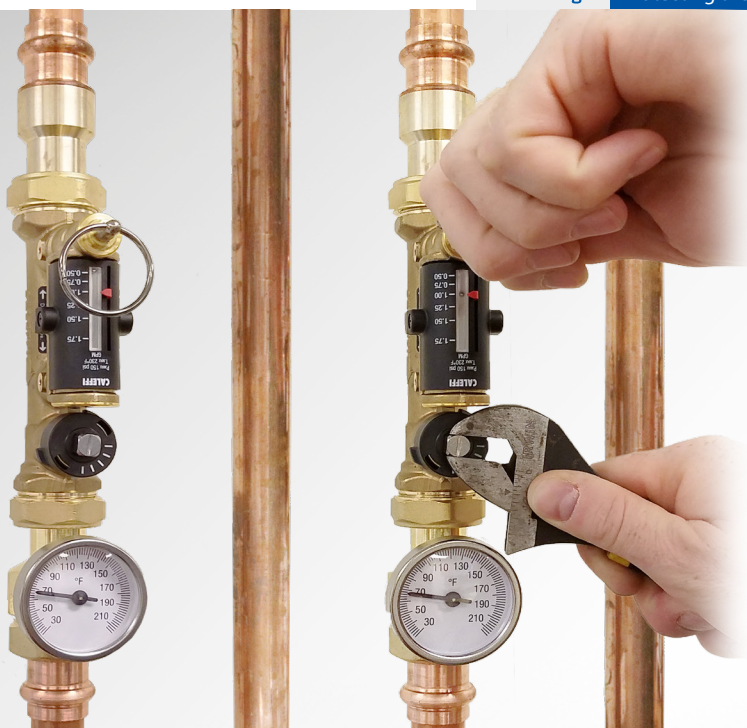

## PRODUCT FEATURES

### ■ Pull-adjust-release:

With the industry-exclusive built-in direct reading flow meter, adjust the desired flow rate, then release the ring. That's it! Saves time compared to valves requiring a DP instrument or manometer.

### ■ Always-clear flow scale:

Ball/magnet flow indicator in sealed, isolated chamber, that is not in direct contact with system fluid. Remains clean for reliable readings, and provides clear, accurate readings unlike traditional sight flow meters.

### ■ Multi-functional:

Combined balancing valve, flow meter, temperature gauge and check valve simplifies installation.

### ■ Application flexibility:

Designed for balancing domestic hot water recirculation systems, but also suitable for non-potable applications.

### ■ Memory pointer:

Sliding pointer on the scale provides flow rate memory indication.

### ■ Simple servicing:

By-pass channel easily detaches for cleaning. Industry-exclusive union fittings.


### Balancing made fast, easy, and accurate

The Caleffi QuickSetter+™ takes the guess work and labor out of balancing. With the valve's exclusively designed venturi mechanism, the installer simply pulls the flow indicator by-pass pin, adjusts the flow to the desired flow rate while viewing the built-in sight gauge, and releases the pin. Easy, accurate balancing in seconds. No instruments or reference graphs are needed.



PRODUCT RANGE - QuickSetter+™

SIZES	FLOW SCALE (GPM)	NO OUTLET TEMPERATURE GAUGE			
		SWEAT UNION	PRESS UNION	PEX GRMP UNION (ASTM F1807)	PEX EXPANSION UNION (ASTM F1960)
½"	0.5 - 1.75	132439AFC	---	132434AFC	132432AFC
	2.0 - 7.0	132459AFC	---	132454AFC	132452AFC
¾"	0.5 - 1.75	132539AFC	132536AFC	132534AFC	132532AFC
	2.0 - 7.0	132559AFC	132556AFC	132554AFC	132552AFC
1"	0.5 - 1.75	132639AFC	132636AFC	132634AFC	132632AFC
	2.0 - 7.0	132659AFC	132656AFC	132654AFC	132652AFC
<b>WITH OUTLET TEMPERATURE GAUGE</b>					
½"	0.5 - 1.75	132438AFC	---	132435AFC	132433AFC
	2.0 - 7.0	132458AFC	---	132455AFC	132453AFC
¾"	0.5 - 1.75	132538AFC	132537AFC	132535AFC	132533AFC
	2.0 - 7.0	132558AFC	132557AFC	132555AFC	132553AFC
1"	0.5 - 1.75	132638AFC	132637AFC	132635AFC	132633AFC
	2.0 - 7.0	132658AFC	132657AFC	132655AFC	132653AFC

CONSTRUCTION

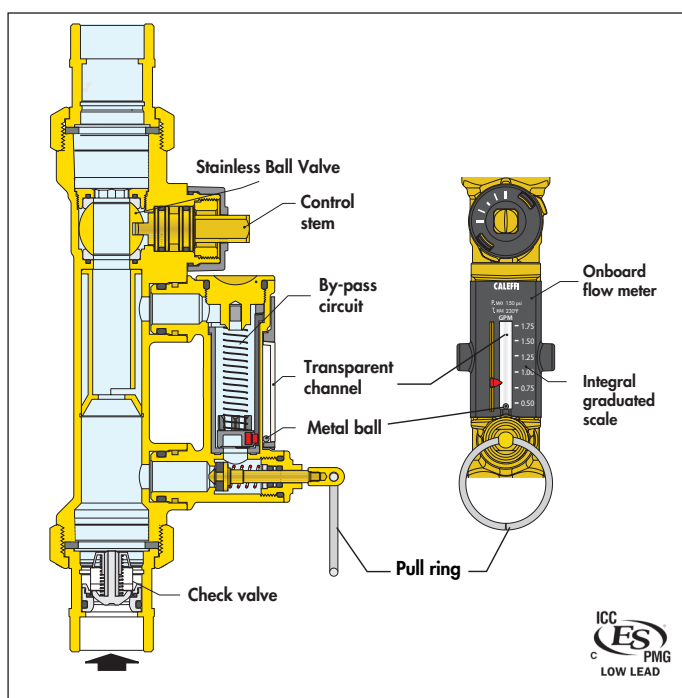

APPLICATION DIAGRAM

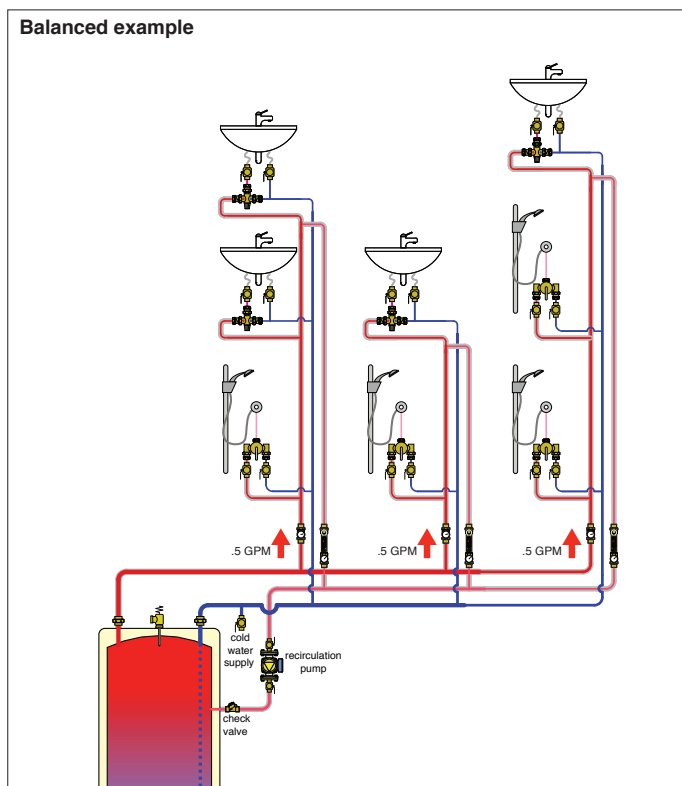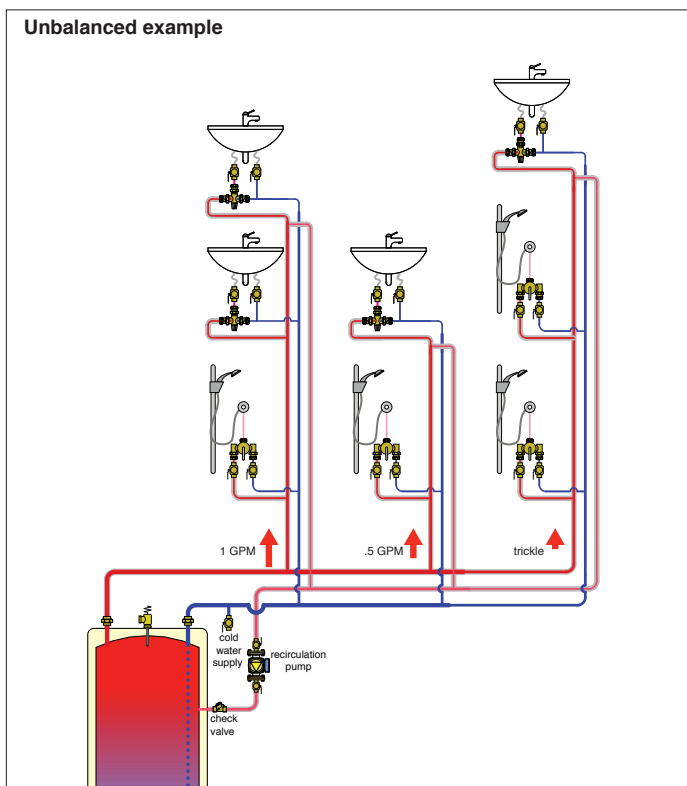

Caleffi Partner:



**CALEFFI**  
Hydronic Solutions

03520-21 NA

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi North America, Inc.  
sales@caleffi.com · www.caleffi.com  
© Copyright 2021 Caleffi North America, Inc.