



QuickSetter+™ BALANCING VALVE WITH FLOWMETER

CALEFFI
Hydronic Solutions



Plumbing

Protecting the system to protect your water



PRODUCT FEATURES

■ Pull-adjust-release:

With the industry-exclusive built-in direct reading flow meter, adjust the desired flow rate, then release the ring. That's it! Saves time compared to valves requiring a DP instrument or manometer.

■ Always-clear flow scale:

Ball/magnet flow indicator in sealed, isolated chamber, that is not in direct contact with system fluid. Remains clean for reliable readings, and provides clear, accurate readings unlike traditional sight flow meters.

■ Multi-functional:

Combined balancing valve, flow meter, temperature gauge and check valve simplifies installation.

■ Application flexibility:

Designed for balancing domestic hot water recirculation systems, but also suitable for non-potable applications.

■ Memory pointer:

Sliding pointer on the scale provides flow rate memory indication.

■ Simple servicing:

By-pass channel easily detaches for cleaning. Industry-exclusive union fittings.


Balancing made fast, easy, and accurate

The Caleffi QuickSetter+™ takes the guess work and labor out of balancing. With the valve's exclusively designed venturi mechanism, the installer simply pulls the flow indicator by-pass pin, adjusts the flow to the desired flow rate while viewing the built-in sight gauge, and releases the pin. Easy, accurate balancing in seconds. No instruments or reference graphs are needed.



PRODUCT RANGE - QuickSetter+™

| SIZES | FLOW SCALE (GPM) | NO OUTLET TEMPERATURE GAUGE | | | |
|-------------------------------|------------------|-----------------------------|-------------|------------------------------|----------------------------------|
| | | SWEAT UNION | PRESS UNION | PEX CRIMP UNION (ASTM F1807) | PEX EXPANSION UNION (ASTM F1960) |
| ½" | 0.5 - 1.75 | 132439AFC | --- | 132434AFC | 132432AFC |
| | 2.0 - 7.0 | 132459AFC | --- | 132454AFC | 132452AFC |
| ¾" | 0.5 - 1.75 | 132539AFC | 132536AFC | 132534AFC | 132532AFC |
| | 2.0 - 7.0 | 132559AFC | 132556AFC | 132554AFC | 132552AFC |
| 1" | 0.5 - 1.75 | 132639AFC | --- | 132634AFC | 132632AFC |
| | 2.0 - 7.0 | 132659AFC | --- | 132654AFC | 132652AFC |
| WITH OUTLET TEMPERATURE GAUGE | | | | | |
| ½" | 0.5 - 1.75 | 132438AFC | --- | 132435AFC | 132433AFC |
| | 2.0 - 7.0 | 132458AFC | --- | 132455AFC | 132453AFC |
| ¾" | 0.5 - 1.75 | 132538AFC | 132537AFC | 132535AFC | 132533AFC |
| | 2.0 - 7.0 | 132558AFC | 132557AFC | 132555AFC | 132553AFC |
| 1" | 0.5 - 1.75 | 132638AFC | --- | 132635AFC | 132633AFC |
| | 2.0 - 7.0 | 132658AFC | --- | 132655AFC | 132653AFC |

CONSTRUCTION

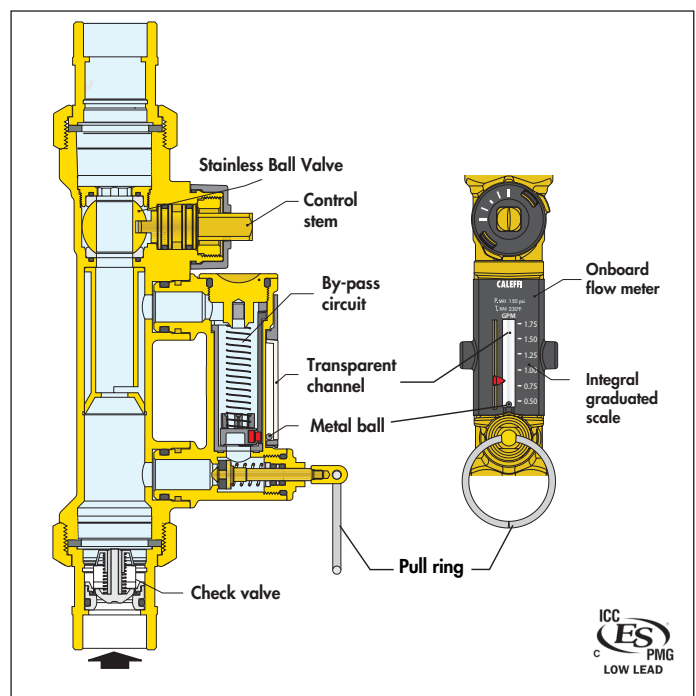

APPLICATION DIAGRAM

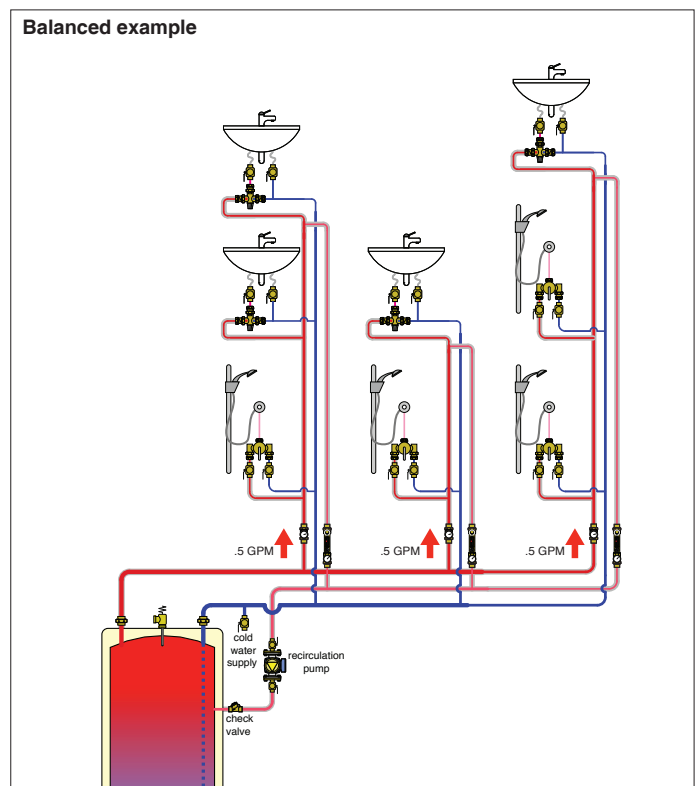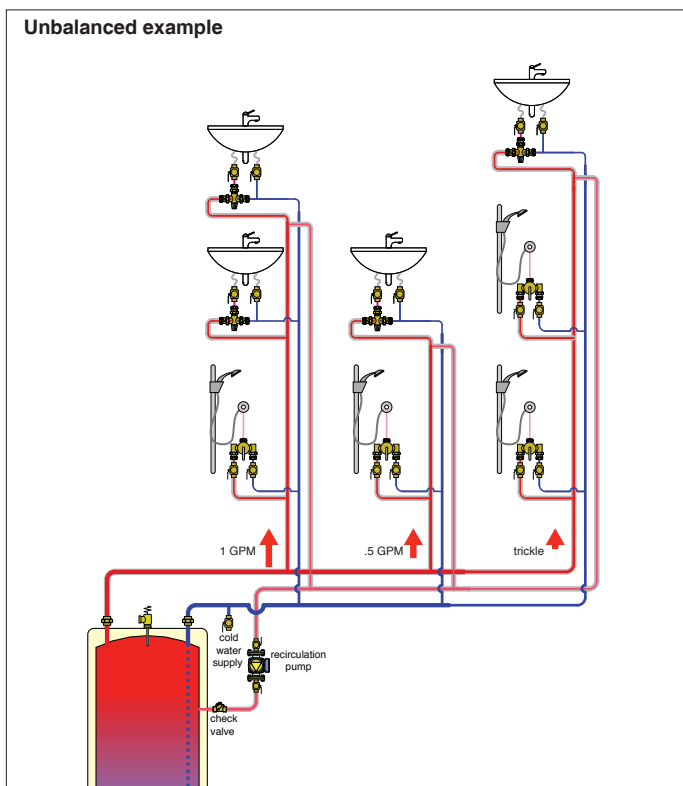

Caleffi Partner:



CALEFFI
Hydronic Solutions

03520-18 NA

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi North America, Inc.
sales@caleffi.com · www.caleffi.com
© Copyright 2018 Caleffi North America, Inc.