




BVT Series - VibraClamp™




- Easy one tool installation.
- Temperature Range:
-40°F (-40°C) to +300°F (148.9°C)
- Dampens vibration and noise.
- Eliminates galvanic corrosion due to metal to metal contact.
- Resists most industrial oils and solvents.
- Secures tubing firmly to strut channel.

Part No.	O.D. Size		Pipe Size		A		B		C		Wt. Each	
	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	Lbs.	(kg)
BVT025	1/4"	(6.3)	1/8"	(3)	1.22"	(30.9)	0.19"	(4.8)	0.49"	(12.4)	.11	(.05)
BVT037	3/8"	(9.5)	1/4"	(6)	1.36"	(34.5)	0.25"	(6.3)	0.61"	(15.5)	.12	(.05)
BVT050	1/2"	(12.7)	3/8"	(10)	1.49"	(37.8)	0.31"	(7.8)	0.74"	(18.8)	.14	(.06)
BVT062	5/8"	(15.9)	1/2"	(15)	1.62"	(41.1)	0.38"	(9.6)	0.86"	(21.8)	.15	(.07)
BVT075	3/4"	(19.0)	5/8"	(17)	1.87"	(47.4)	0.50"	(12.7)	1.15"	(29.2)	.19	(.08)
BVT087	7/8"	(22.2)	3/4"	(20)	2.00"	(50.8)	0.56"	(14.2)	1.27"	(32.2)	.21	(.09)
BVT112	1 1/8"	(28.6)	1"	(25)	2.25"	(57.1)	0.69"	(17.5)	1.52"	(38.6)	.26	(.12)
BVT137	1 3/8"	(34.9)	1 1/4"	(32)	2.51"	(63.7)	0.81"	(20.6)	1.78"	(45.2)	.38	(.17)
BVT162	1 5/8"	(41.3)	1 1/2"	(40)	3.00"	(76.2)	1.00"	(25.4)	2.20"	(55.9)	.40	(.18)
BVT212	2 1/8"	(54.0)	2"	(50)	3.52"	(89.4)	1.25"	(31.7)	2.70"	(68.6)	.55	(.25)
BVT262	2 5/8"	(66.6)	2 1/2"	(65)	4.02"	(102.1)	1.50"	(38.1)	3.20"	(81.3)	.55	(.25)
BVT312	3 1/8"	(79.4)	3"	(80)	4.53"	(115.0)	1.75"	(44.4)	3.70"	(93.9)	.64	(.29)
BVT362	3 5/8"	(92.1)	3 1/2"	(90)	5.05"	(128.2)	2.00"	(50.8)	4.23"	(107.4)	.76	(.34)
BVT412	4 1/8"	(104.8)	4"	(100)	5.55"	(140.9)	2.25"	(57.1)	4.73"	(120.1)	.93	(.42)
BVT612	6 1/8"	(155.5)	6"	(150)	7.62"	(193.5)	3.25"	(82.5)	6.74"	(171.1)	1.36	(.61)

Part No.	Design Load 1		Design Load 2		Design Load 3	
	Lbs.	(kN)	Lbs.	(kN)	Lbs.	(kN)
BVT025	400	(1.78)	50	(0.22)	50	(0.22)
BVT037	400	(1.78)	50	(0.22)	50	(0.22)
BVT050	400	(1.78)	50	(0.22)	50	(0.22)
BVT062	400	(1.78)	50	(0.22)	50	(0.22)
BVT075	600	(2.67)	75	(0.33)	75	(0.33)
BVT087	600	(2.67)	75	(0.33)	75	(0.33)
BVT112	600	(2.67)	75	(0.33)	75	(0.33)
BVT137	600	(2.67)	75	(0.33)	75	(0.33)
BVT162	800	(3.56)	125	(0.55)	125	(0.55)
BVT212	800	(3.56)	125	(0.55)	125	(0.55)
BVT262	800	(3.56)	125	(0.55)	125	(0.55)
BVT312	800	(3.56)	125	(0.55)	125	(0.55)
BVT362	1000	(4.45)	200	(0.67)	150	(0.67)
BVT412	1000	(4.45)	200	(0.67)	150	(0.67)
BVT612	1000	(4.45)	200	(0.67)	150	(0.67)



BVP Series - VibraClamp™

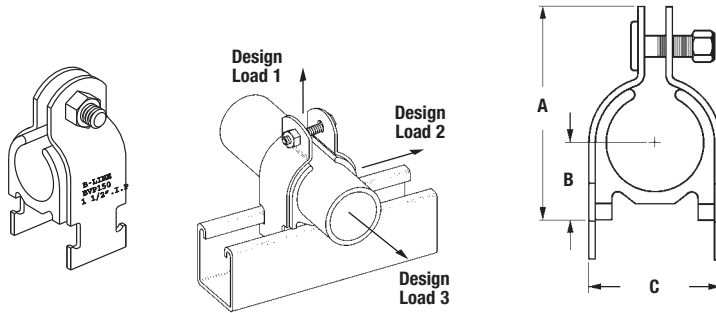

- Easy one tool installation.
- Temperature Range:
-40°F (-40°C) to +300°F (148.9°C)
- Dampens vibration and noise.
- Eliminates galvanic corrosion due to metal to metal contact.
- Resists most industrial oils and solvents.
- Secures pipe firmly to strut channel.

Part No.	O.D. Size		Pipe Size		Dimensions						Wt. Each	
	in.	(mm)	in.	(mm)	A		B		C		Lbs.	(kg)
BVP025	0.540"	(13.7)	1/4"	(6)	1.61"	(39.9)	0.37"	(9.4)	0.87"	(22.1)	.15	(.07)
BVP037	0.675"	(17.1)	3/8"	(10)	1.86"	(47.2)	0.50"	(12.7)	1.15"	(29.2)	.18	(.08)
BVP050	0.875"	(22.2)	1/2"	(15)	1.99"	(50.5)	0.56"	(14.2)	1.27"	(32.3)	.20	(.09)
BVP075	1.050"	(26.7)	3/4"	(20)	2.25"	(57.1)	0.69"	(17.5)	1.52"	(38.6)	.21	(.09)
BVP100	1.312"	(33.3)	1"	(25)	2.51"	(63.8)	0.81"	(20.6)	1.77"	(45.0)	.20	(.09)
BVP125	1.660"	(42.2)	1 1/4"	(32)	3.00"	(76.2)	1.00"	(25.4)	2.21"	(56.1)	.36	(.16)
BVP150	1.900"	(48.3)	1 1/2"	(40)	3.21"	(81.5)	1.12"	(28.4)	2.41"	(61.2)	.40	(.18)
BVP200	2.375"	(60.3)	2"	(50)	3.77"	(95.8)	1.37"	(34.8)	2.96"	(75.2)	.45	(.20)
BVP250	2.875"	(73.0)	2 1/2"	(65)	4.28"	(108.7)	1.62"	(41.1)	3.46"	(87.9)	.54	(.24)
BVP300	3.500"	(88.9)	3"	(80)	5.05"	(128.3)	2.00"	(50.8)	4.24"	(107.7)	.81	(.37)
BVP350	4.000"	(101.6)	3 1/2"	(90)	5.55"	(140.9)	2.25"	(57.1)	4.74"	(120.3)	.87	(.39)
BVP400	4.500"	(114.3)	4"	(100)	6.05"	(153.7)	2.50"	(63.5)	5.24"	(133.1)	1.09	(.49)
BVP500	5.563"	(141.3)	5"	(125)	6.84"	(173.7)	3.00"	(76.2)	6.24"	(158.4)	1.36	(.61)
BVP600	6.625"	(168.3)	6"	(150)	8.24"	(209.3)	3.56"	(90.4)	7.36"	(186.9)	1.63	(.74)

Part No.	Design Load 1		Design Load 2		Design Load 3	
	Lbs.	(kN)	Lbs.	(kN)	Lbs.	(kN)
BVP025	400	(1.78)	50	(0.22)	50	(0.22)
BVP037	600	(2.67)	75	(0.33)	75	(0.33)
BVP050	600	(2.67)	75	(0.33)	75	(0.33)
BVP075	600	(2.67)	75	(0.33)	75	(0.33)
BVP100	600	(2.67)	75	(0.33)	75	(0.33)
BVP125	800	(3.56)	125	(0.55)	125	(0.55)
BVP150	800	(3.56)	125	(0.55)	125	(0.55)
BVP200	800	(3.56)	125	(0.55)	125	(0.55)
BVP250	800	(3.56)	125	(0.55)	125	(0.55)
BVP300	1000	(4.45)	200	(0.89)	150	(0.67)
BVP350	1000	(4.45)	200	(0.89)	150	(0.67)
BVP400	1000	(4.45)	200	(0.89)	150	(0.67)
BVP500	1000	(4.45)	200	(0.89)	150	(0.67)
BVP600	1000	(4.45)	200	(0.89)	150	(0.67)

