

|             |  |           |  |      |  |
|-------------|--|-----------|--|------|--|
| Project     |  | Catalog # |  | Type |  |
| Prepared by |  | Notes     |  | Date |  |



# Metalux

## 10,000 Lumen Shoplight

High Output LED Shoplight

### Typical Applications

Workshops • Barns • Garages • Storage Rooms

### Interactive Menu

- Order Information page 2
- Product Warranty

### Product Certification




### Product Features



### Top Product Features

- 10,000 high lumen output Shoplight
- Fixture-to-fixture linkability (up to 4)
- Replaces up to 4 lamp T8 fluorescents (128W equivalent)
- Frosted lens provides a wide, even light distribution
- Ideal for garages, barns, workshops and open areas w/ ceilings up to 15ft high

### Dimensional and Mounting Details

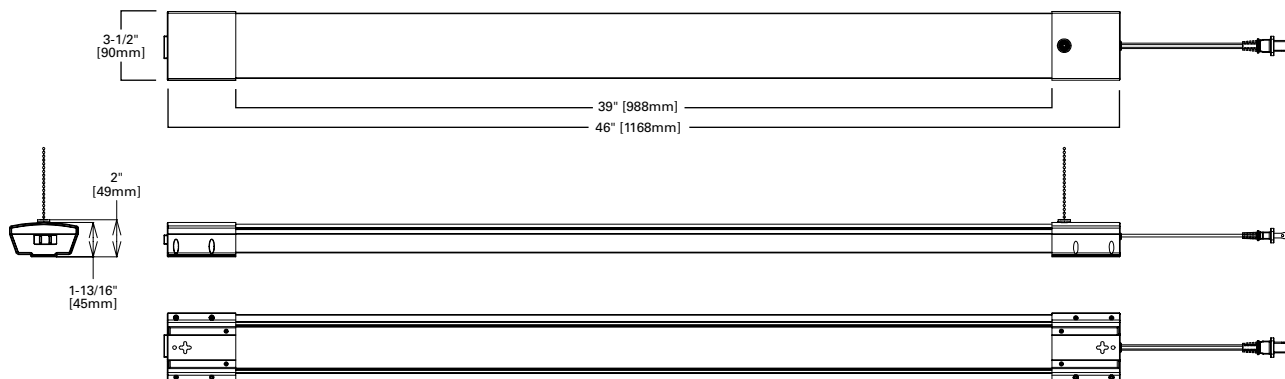

## Order Information

| Catalog Number | Lumen | Wattage | UPC          | Unit Weight | Pallet Quantity |
|----------------|-------|---------|--------------|-------------|-----------------|
| 4SHP10040R     | 10000 | 85W     | 080083250103 | 2.4 lbs.    | 120             |

## Product Specifications

### Construction

- Metal housing with high impact plastic end caps
- Frost polycarbonate white lens

### Mounting

- Suspension mount using included 12-inch chain and S-hook
- Surface mount using included snap-on brackets
- Mounting hardware, wall anchors and eyebolts included

### Linkable Outlet

- Link up to 4 fixtures together using 120V outlet

### Electrical

- 120V, FCC rated Class B, non-dimming driver
- 5ft 2-blade grounded cord and plug included
- On-off pull chain for easy operation

### Optical Shielding

- UV-stabilized lens
- Wide distribution diffuse lens for greater work coverage area and glare control

### LED and Light Engine

- 4000K CCT and minimum 80 CRI
- L70 at 50,000 rated life-hours (TM-21), or up to 34 years at 4 hrs/day.
- LED modules comply with IESNA LM-79 and LM-80 standards

### Compliance and Certifications

- ETLus listed for dry location
- FCC part 15 Class B (residential) compliant
- RoHS compliant
- Operating temperature of -20°C to 40°C

### Product Warranty

- 5-year warranty