

RA-DM
Baffle Adjustable Canless LED Downlights

HALO



HALO RA-DM Adjustable Canless Downlights mount directly to the ceiling - no housing required. A great solution for both remodels and new construction.

The adjustable gimbal tilts up to 35° and rotates 360° and below-the-ceiling installation let you aim light where you want. Ideal for wall wash, task lighting, or slope ceiling applications.

Choose between 5 color temperatures, from soft white (2700K) to daylight (5000K), or opt for the dim-to-warm setting that mimics the glow of candlelight.

The RA-DM includes selectable lumens, so you can select your preferred brightness depending on your ceiling height.



Product Features

- 4" and 6" available
- Adjustable gimbal tilts up to 35° and rotates 360°
- No housing or junction box required for installation
- Installs in 1/2" to 1-1/4" thick ceilings
- 6-Position Switch: 5-Color Field-SeleCCTable warm white to daylight (2700K, 3000K, 3500K, 4000K, 5000K) + Dim-to-Warm (3000K dims to 1800K)
- Selectable Lumens: 600/900 lms
- Phase cut LE/TE dimming down to 5% (120V input) with compatible controls
- Air-tite, IC-rated, damp rated, and ENERGY STAR® certified



LEARN MORE



RA4LS9FSD2W1EWHDM



RA6LS9FSD2W1EWHDM



NO HOUSING NEEDED!




360°
ROTATION



35°
TILT

Personalize Your Lighting

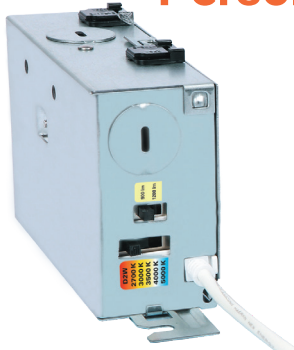

5
seleCCTable
colors



dim-to-warm
option included

Select the perfect color temperature for your space with 5 options from soft white (2700K) to daylight (5000K) or the dim-to-warm setting.



selectable
lumens

Choose between 2 lumen options (600-900) depending on your ceiling height or desired light level.



dim-to-warm
set the mood

3000K 1800K

The dim-to-warm setting begins at 3000K and dims smoothly to 1800K, creating a rich, warm glow resembling candlelight.

Catalog Number	Material Number	Description	UPC	Accessories	
				Extension Cable	Mounting Frame
RA4LS9FSD2W1EWHDM	13645050	4" Adjustable Canless LED Downlight, 600/900 Selectable lumens, 90 CRI, 120V 60Hz, 5% phase cut LE/TE dimming, Field-SeleCCTable: D2W, 2700, 3000, 3500, 4000, or 5000K	080083283019	HLB06BLEEC 6 ft. extension cable HLB12BLEEC 12 ft. extension cable	MF4RC 4" round mounting frame with drywall collar HL4RSMF 4" round-to-square mounting frame
RA6LS9FSD2W1EWHDM	13645051	6" Adjustable Canless LED Downlight, 600/900 Selectable lumens, 90 CRI, 120V 60Hz, 5% phase cut LE/TE dimming, Field-SeleCCTable: D2W, 2700, 3000, 3500, 4000, or 5000K	080083283033	HLB20BLEEC 20 ft. extension cable	MF6RC 6" round mounting frame with drywall collar HL6RSMF 6" round-to-square mounting frame