



COMMERCIAL



1600T9 Series - Commercial - Electronic Washdown Urinal (with H₂Optics®)

1600T9003TR

Description

Adjustable Flush Volume Factory Set @ 0.5 gpf (1.9 Lpf), Infrared Sensor, Stainless Steel Finish, Hardwire Operated, for Urinal Fixtures, Top Inlet Closet Mounting, for Top Spud Connection Rough-In, Electronic Manual Override, Front Accessible Rough-In Box

Specification

- Flush Volume: Adjustable - Factory set @ 0.5 gpf (1.9 Lpf)
- Sensor Type: Infrared
- Finish: Stainless Steel
- Power Supply: Hardwire Operated (24 VAC) requires transformer (*sold separately*)
- Fixture Type: Urinal
- Closet Mounting: Top Inlet, Urinal
- Fixture Connection: Top Spud
- Override: Electronic Manual
- Rough-In Box: Front Accessible

Features

- Cover with integral sensor
- Vandal resistant mounting screws, metal mounting box
- TRIM MODELS - Supplied as sensor and override button attached to cover
- Preset blocking time, 0 second activation delay
- Electronically Adjustable Flush Volume

Required Accessories

- **060704A** - 120 to 24 VAC Class 2 20 VA - (Transformer for 5 units)
- **060771A** - 120 to 24 VAC Class 2 40 VA - (Transformer for up to 10 Units)



Complies With

- ASSE 1037/ASME A112.1037/ CSA B125.37
- ICC/ANSI A117.1



(Contact Delta Representative for State and/or Local Approvals)

Operation

- Hands free touch-less operation
- Power function light
- Adjustable 24 hour courtesy flush factory set to off
- Selectable sensing distance - 12 to 28" (305 to 711 mm) in 4" (102 mm) increments factory set to 20" (508 mm)
- 8 second blocking time

Notes

- Rough-in - 1600T9003RI (*ordered separately*)

WaterSense® is a registered trademark of the U.S. Environmental Protection Agency.


Flow rates at 60 psi (414 kPa).

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Mounting locations are suggested only. Check with local codes for requirements in your area.

Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

1600T9003TR

This specification sheet was produced on July 12, 2023.

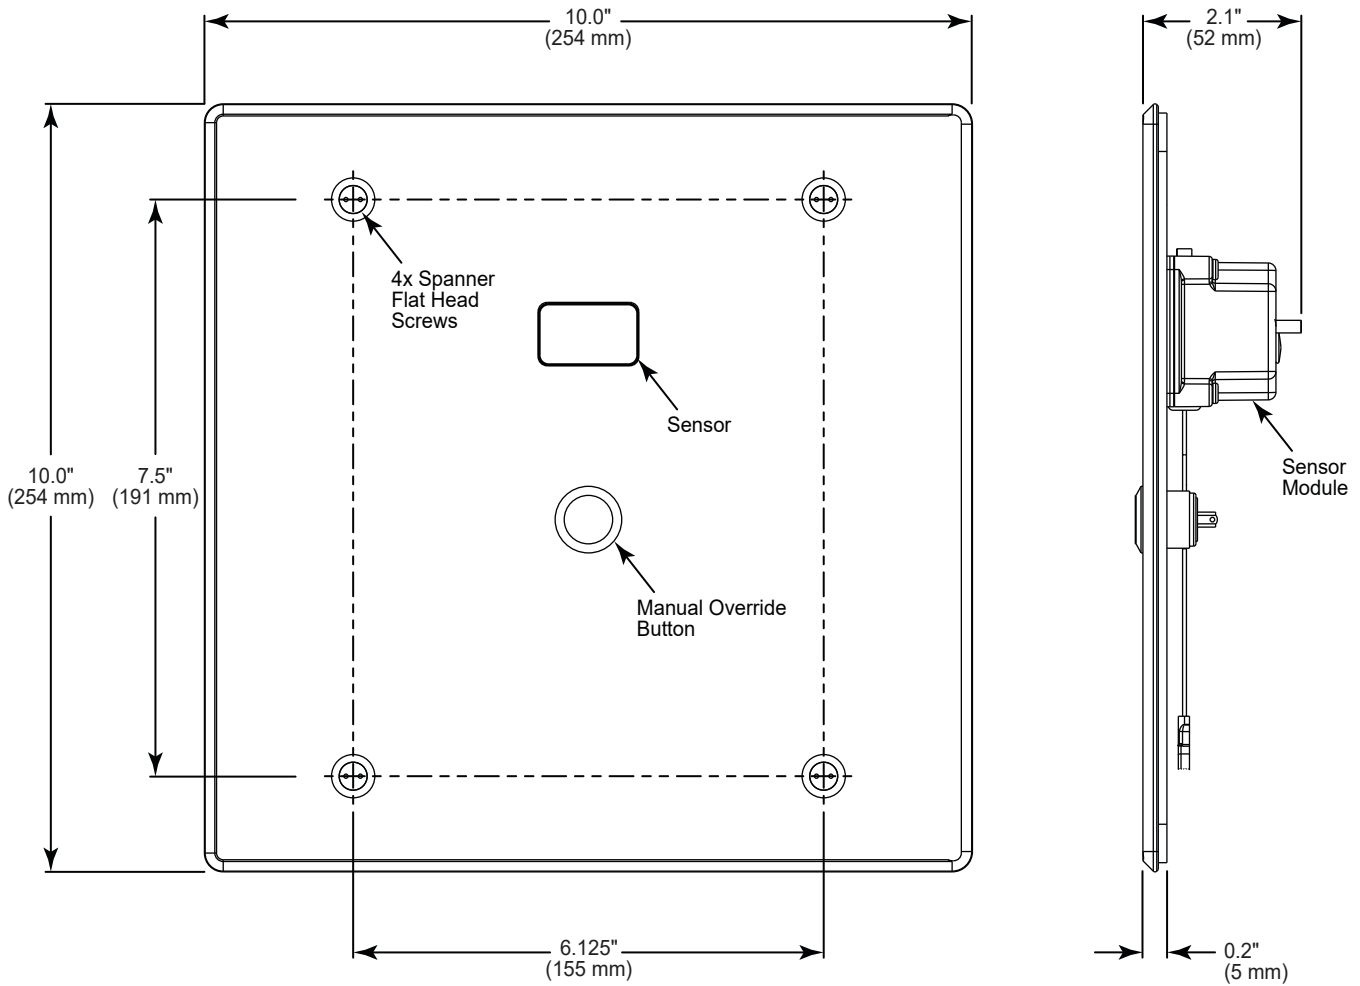

NOTICE

- Dimensional Units: Inch (mm)
- Measurements may vary $\pm 0.25"$ (6 mm)

WaterSense® is a registered trademark of the U.S. Environmental Protection Agency.

Flow rates at 60 psi (414 kPa).

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Mounting locations are suggested only. Check with local codes for requirements in your area.

Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

1600T9003TR

This specification sheet was produced on July 12, 2023.