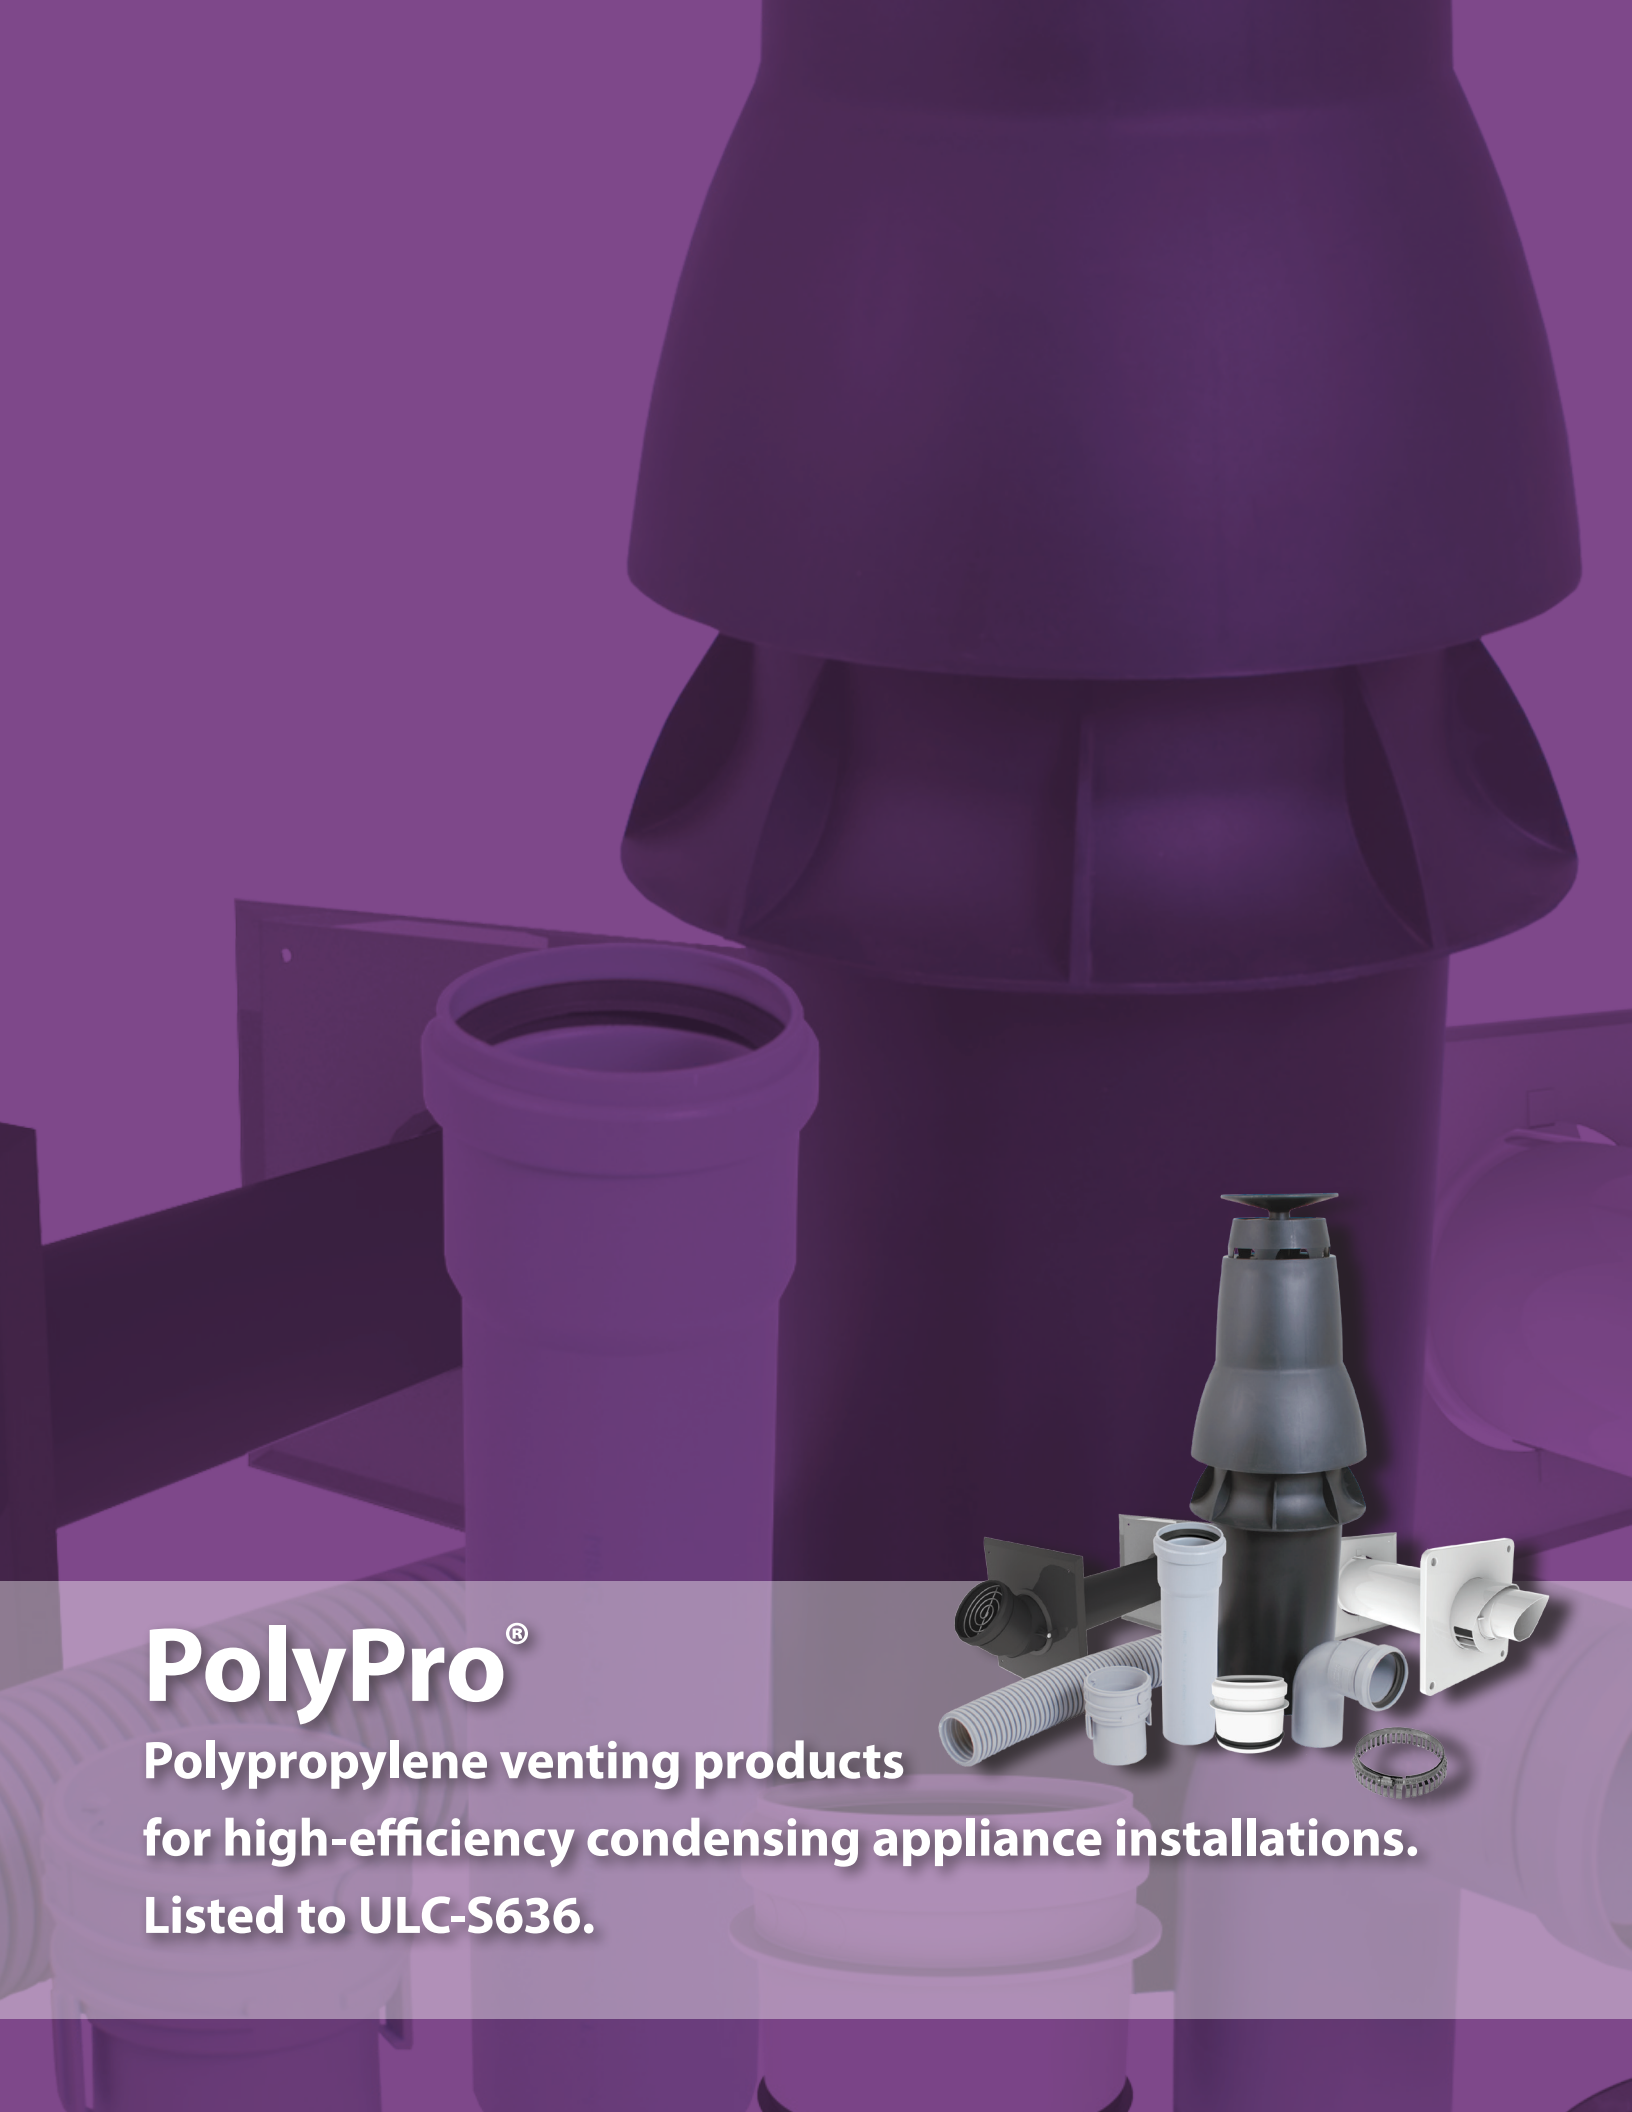


The background of the advertisement features a large, dark purple, flared vent pipe. In the foreground, there is a collection of various white polypropylene venting components, including a large vertical pipe, a smaller vertical pipe, a horizontal pipe, a elbow, a tee, a cap, a flange, and a small circular vent cap. The text is overlaid on the lower left portion of the image.

# PolyPro<sup>®</sup>

**Polypropylene venting products  
for high-efficiency condensing appliance installations.  
Listed to ULC-S636.**

# PolyPro®

## Specifications

### Applications

PolyPro is a polypropylene vent pipe for use with ANSI Category II and IV gas-burning appliances, including high-efficiency water heaters, condensing boilers and warm air furnaces. PolyPro is listed by Intertek to the ULC S636 standard in Canada as a Class IIA, IIB and IIC vent system suitable for exhaust temperatures up to 230°F / 110°C, and a maximum positive pressure of 15 in-w.c.

### Materials and Construction

Rigid pipe constructed of 2.2mm (minimum) thick polypropylene. Flex is double-wall polypropylene. EPDM or optional Viton Gaskets

### Clearances

0" clearance to combustibles for exhaust temperatures up to 194°F / 90°C, and 0" clearance for vertical installations up to exhaust temperatures of 230°F / 110°C and ¼" / 6mm clearance to combustibles for horizontal installations at exhaust temperatures up to 230°F / 110°C. PolyPro concentric vent system components, including concentric Horizontal Termination and Vertical Termination, are listed at 0" clearance to combustibles for exhaust temperatures up to 230°F / 110°C. Double Wall PolyPro provides 0" clearance to combustibles.

### Diameters

2" (60mm), 3" (80mm), 4" (100mm), 5" (130mm), 6" (150mm), and 8" (200mm).  
2" x 4" (60mm x 100mm)  
3" x 5" (80mm x 130mm)  
4" x 6" (100mm x 150mm)

### Listings

Listed with the appliance in the USA and Canada, check with appliance manufacturer. Intertek / ETL listed to ULC S636 Listed as a Class IIA, IIB, and IIC vent system.

PolyPro is approved by the  
Massachusetts Plumbers Board.  
Approval code G1-0811-42.



PolyPro and PVC/CPVC: PVC pipes are commonly used for venting water heaters, condensing boilers and warm air furnaces. PolyPro is an engineered alternative for condensing gas appliances. Engineered for venting, it is easier and faster to install than PVC, saving the contractor time and money. Polypropylene has a higher operating temperature limit of 230°F/110°C (PVC is 149°F/65°C max and CPVC is 194°F/90°C). PolyPro is engineered with a condensation management system.

### Flex

PolyPro Flex through B Vent as a Chase: Retrofit venting for new, high-efficiency appliances. When replacing a mid-efficiency appliance with a new condensing 90+ appliance, you can use the existing B vent (any brand) as a chase for the new appliance with PolyPro. The perfect solution for utilizing the B Vent already in place, use the convenient pull cone to insert double-wall PolyPro Flex through the B Vent pipe and terminate in either a two pipe or single pipe system. At the other end is the unique B Vent/PolyPro Support Cap, allowing for the connection of flex to rigid PolyPro lengths and elbows to finish the installation.

### Terminations

DuraVent's concentric PolyPro vertical terminations are lab tested to handle harsh weather and remain icicle free in freezing temperatures. Air circulation and weather conditions like rain, wind and ice have the potential to reduce the efficiency of a unit's performance and the operation of its venting system.

### Double Wall

DW shells are offered separately, handling pipe lengths, elbows, and appliance connections. For installation, single wall PolyPro is inserted into the metal shell, which has a support disk inside. Adjustable DW sections are available if needed. The vent system is supported using typical means, including wall straps, elbow straps and roof or firestop supports. Vertical and Horizontal Terminations are available. Additionally, you can use adapters to transition from a DuraVent / Security Chimney stainless vent systems, to DW PolyPro. This integration of vent systems gives you unmatched installation flexibility.

### Concentric

PolyPro® Concentric provides users the most versatile polypropylene venting system for high efficiency, condensing appliances. The injection-molded modular system is designed with a powder-coated aluminum outer pipe and a polypropylene inner pipe. It does not require a locking band and provides users with a fast, safe, clean, and sustainable venting solution. The PolyPro Concentric system also includes elbows that have a smooth wall lining and are designed to reduce condensate that may be left behind.

The DuraVent PolyPro product line is superior in performance and easier to install than PVC or CPVC pipe. Polypropylene has a higher operating temperature limit of 230°F/110°C (PVC is 149°F/65°C max and CPVC is 194°F/90°C), and PolyPro is engineered with a corrosion-free, condensation management system.

## Commercial & OEM Product Development

DuraVent engineers are expertly skilled to develop venting components to OEM specs. To satisfy specific venting requirements, DuraVent has the experience to provide custom design, prototyping and testing of vent systems and components engineered to the demands of specific appliances.

### The PolyPro Commercial Difference

- Available in 5in. (130mm), 6in. (150mm) and 8in. (200mm) diameters.
- Completely smooth inner wall for optimal flow performance.
- Components designed for complete discharge of condensate.
- Design allows for system distance adjustment from the back of the appliance.
- Sizing services available to help in calculating required vent size.

### PolyPro® Locking Clamp



DuraVent is dedicated to one thing: focusing on the design and manufacturing of venting products. As experts in this industry, our team is passionate about creating innovative, quality products. We invest in equipment with the latest technology to develop and test venting products that are engineered to one standard: excellence. All measuring equipment is calibrated to the same levels as used by testing agencies and are compliant with ISO 17025, the test-laboratory standard.



### Wind Tunnel Laboratory


The wind tunnel lab allows us to gather precise data with 270 degrees of measurement on terminations. All data is analyzed for product performance under rigorous conditions before going to market.

### Rain Testing


Labs test the vapor/moisture barrier of products by subjecting them to extreme rain and wind conditions. These tests are compliant with both the US and Canadian requirements as well as the stringent European standards.

### Climate Testing


Labs have developed a patented ice testing system in the climate room. Tests run to -4°F (-20°C). PolyPro vertical terminations are engineered to remain icicle free.

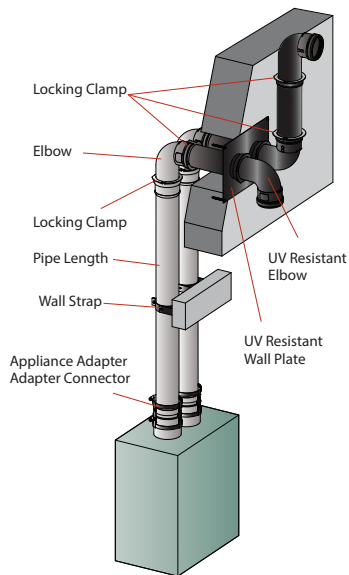


**Horizontal Twin Pipe Elbow Termination**

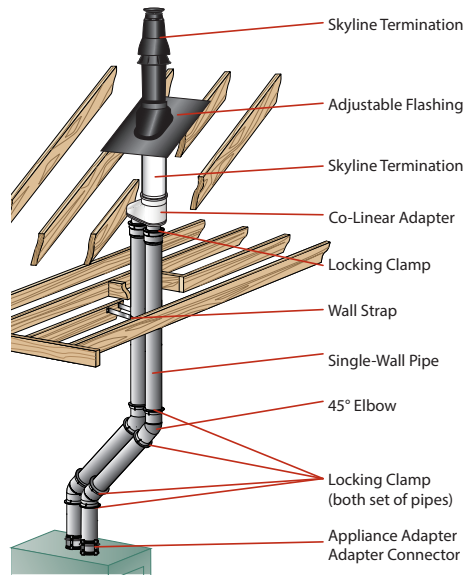



**Twin Pipe with Concentric Termination**

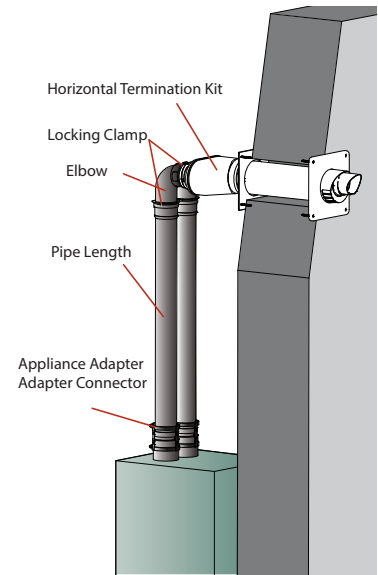

**Horizontal Twin Pipe Concentric**

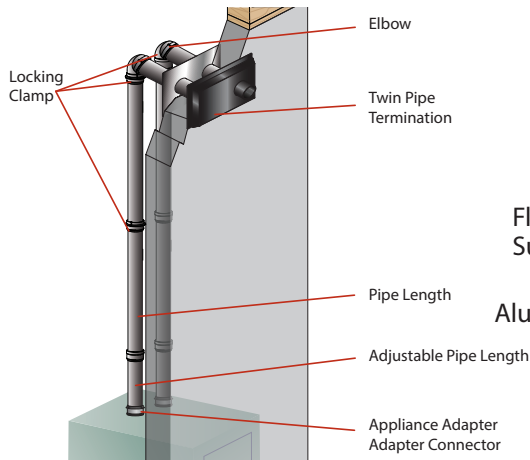


**Horizontal Twin Pipe Below Grade**

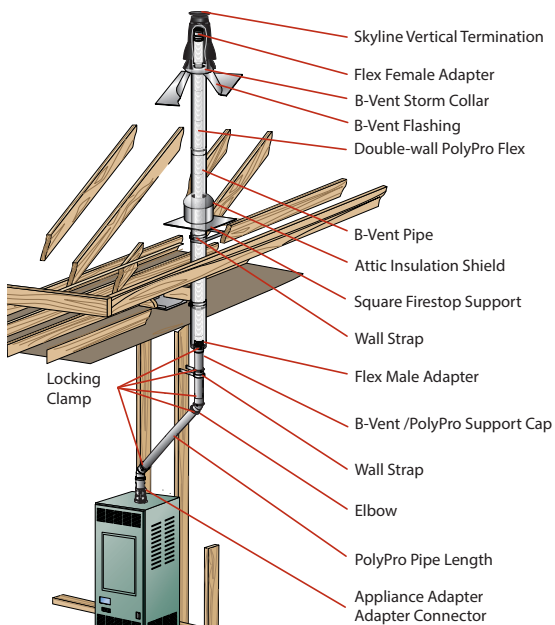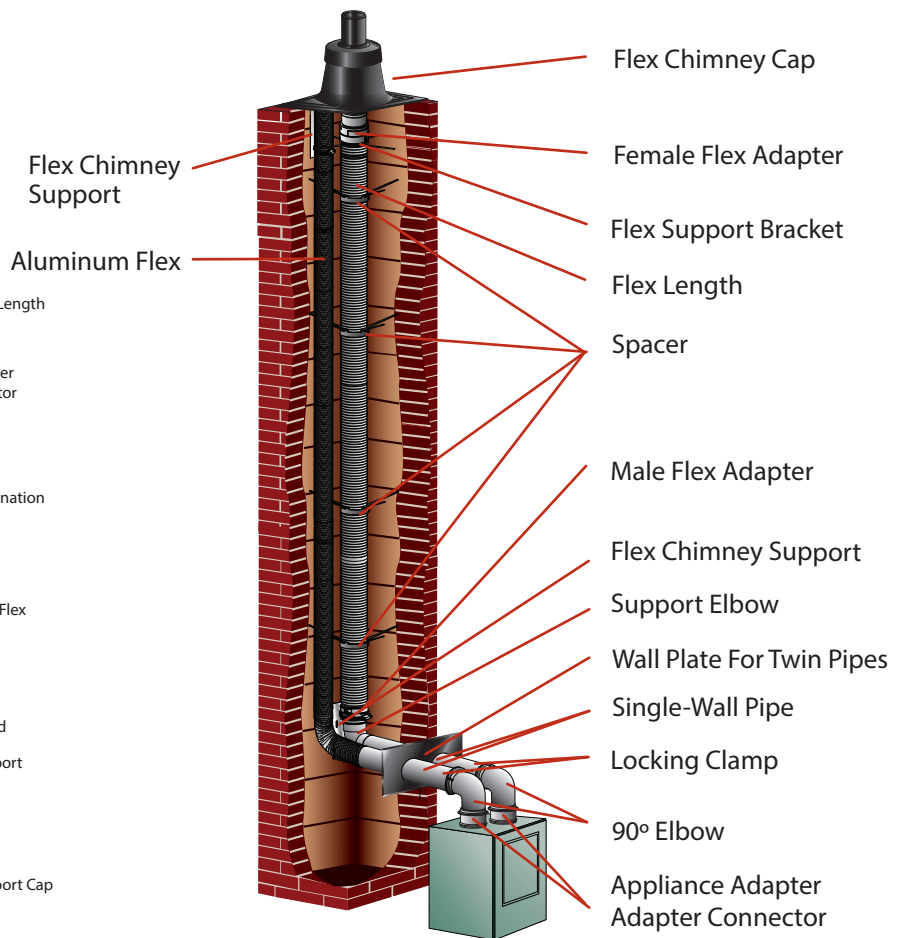

**Flex Through B vent as a Chase**


## Single-Wall Pipe



Use to vent condensing appliances. 2" (60mm) of overlap at the joint. Listed to ULC S636. Locking Clamps are required at all joint connections. Includes 1 Locking Clamp per each length.

| SIZE       | 12"   305mm  |           | 36"   914mm  |           | 72"   1829mm |           |
|------------|--------------|-----------|--------------|-----------|--------------|-----------|
|            | ORDER #      | STOCK #   | ORDER #      | STOCK #   | ORDER #      | STOCK #   |
| 2"   60mm  | 2PPS-12C     | 810014475 | 2PPS-36C     | 810014477 | 2PPS-72C     | 810014479 |
| 3"   80mm  | 3PPS-12C     | 810014528 | 3PPS-36C     | 810014532 | 3PPS-72C     | 810014534 |
| 4"   100mm | 4PPS-12C     | 810014587 | 4PPS-36C     | 810014589 | 4PPS-72C     | 810014591 |
| 5"   130mm | 5PPS-12C     | 810014652 | 5PPS-36C     | 810014653 | 5PPS-72C     | 810014654 |
| 6"   150mm | 6PPS-12C     | 810014681 | 6PPS-36C     | 810014683 | 6PPS-72C     | 810014685 |
| SIZE       | 40"   1016mm |           | 75"   1905mm |           |              |           |
|            | ORDER #      | STOCK #   | ORDER #      | STOCK #   |              |           |
| 8"   200mm | 8PPS-40C     | 810014802 | 8PPS-75C     | 810014803 |              |           |


## 9' Single-Wall Pipe



Use to vent condensing appliances. 2" (60mm) of overlap at the joint. Listed to ULC S636. Locking Clamps are required at all joint connections. Includes 1 Locking Clamp per each length. Sold in full box quantities only.

| SIZE       | 9'   229mm |           |
|------------|------------|-----------|
|            | ORDER #    | STOCK #   |
| 2"   60mm  | 2PPS-108   | 810014028 |
| 3"   80mm  | 3PPS-108   | 810013496 |
| 4"   100mm | 4PPS-108   | 810013578 |
| 6"   150mm | 6PPS-108   | 810013579 |


## Black UV Resistant Single-Wall Pipe



Use to vent condensing appliances. 2" (60mm) of overlap at the joint. Listed to ULC S636. Made of UV resistant polypropylene. Includes 1 Locking Clamp.

| SIZE       | 12"   305mm |           | 36"   914mm |           |
|------------|-------------|-----------|-------------|-----------|
|            | ORDER #     | STOCK #   | ORDER #     | STOCK #   |
| 2"   60mm  | 2PPS-12BC   | 810014476 | 2PPS-36BC   | 810014478 |
| 3"   80mm  | 3PPS-12BC   | 810014531 | 3PPS-36BC   | 810014533 |
| 4"   100mm | 4PPS-12BC   | 810014588 | 4PPS-36BC   | 810014590 |
| 6"   150mm | 6PPS-12BC   | 810014682 | 6PPS-36BC   | 810014684 |


## Adjustable Pipe

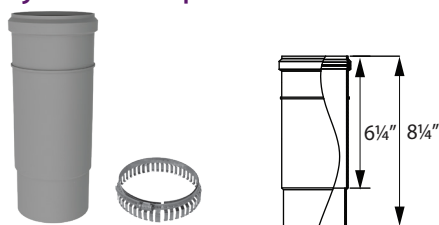

Use to add length to straight length of PolyPro pipe. Slips over any standard single-wall pipe length to form a telescoping pipe section. 4 1/2" (114mm) of adjustment. Adjustable pipe not available in 8" (200mm) diameter. Includes 1 Locking Clamp.

| SIZE       | ORDER #    | STOCK #   | SIZE       | ORDER #    | STOCK #   |
|------------|------------|-----------|------------|------------|-----------|
| 2"   60mm  | 2PPS-08ALC | 810014853 | 5"   130mm | 5PPS-08ALC | 810014856 |
| 3"   80mm  | 3PPS-08ALC | 810014854 | 6"   150mm | 6PPS-08ALC | 810014857 |
| 4"   100mm | 4PPS-08ALC | 810014855 |            |            |           |


## Test Port

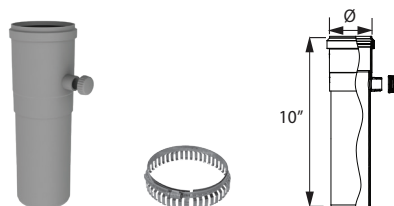

Use for combustion analysis testing without drilling holes into the vent system. Port cap is threaded for easy removal. Install immediately above the appliance. Includes 1 Locking Clamp.

| SIZE       | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|------------|----------|-----------|------------|----------|-----------|
| 2"   60mm  | 2PPS-TPC | 810014496 | 5"   130mm | 5PPS-TPC | 810014663 |
| 3"   80mm  | 3PPS-TPC | 810014551 | 6"   150mm | 6PPS-TPC | 810014695 |
| 4"   100mm | 4PPS-TPC | 810014610 | 8"   200mm | 8PPS-TPC | 810014812 |


## 45° Elbow

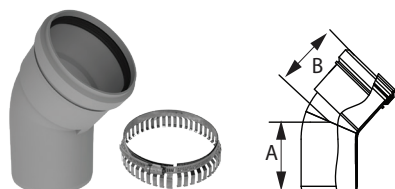

Offsets around obstructions as needed. Includes 1 Locking Clamp.

| SIZE       | ORDER #   | STOCK #   | A               | B                |
|------------|-----------|-----------|-----------------|------------------|
| 2"   60mm  | 2PPS-E45C | 810014481 | 2 7/8"   72.5mm | 2 11/16"   69mm  |
| 3"   80mm  | 3PPS-E45C | 810014537 | 2 7/8"   73mm   | 2 7/8"   73mm    |
| 4"   100mm | 4PPS-E45C | 810014594 | 2 13/16"   78mm | 2 13/16"   78mm  |
| 5"   130mm | 5PPS-E45C | 810014656 | 3 3/4"   95mm   | 3 13/16"   98mm  |
| 6"   150mm | 6PPS-E45C | 810014689 | 3 13/16"   98mm | 3 15/16"   101mm |
| 8"   200mm | 8PPS-E45C | 810014807 | 4 7/16"   111mm | 5 7/16"   131mm  |


## Black UV Resistant 45° Elbow

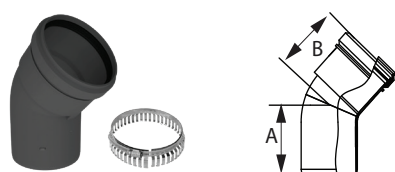

Offsets around obstructions as needed. Made of UV resistant polypropylene. May be used for terminations. Order Bird Guard Screen to protect opening when used as termination. Includes 1 Locking Clamp.

| SIZE       | ORDER #    | STOCK #   | A               | B               |
|------------|------------|-----------|-----------------|-----------------|
| 2"   60mm  | 2PPS-E45BC | 810014482 | 2 7/8"   73mm   | 2 11/16"   69mm |
| 3"   80mm  | 3PPS-E45BC | 810014538 | 2 7/8"   73mm   | 2 7/8"   73mm   |
| 4"   100mm | 4PPS-E45BC | 810014595 | 2 13/16"   78mm | 2 1/2"   65mm   |


## 90° Elbow

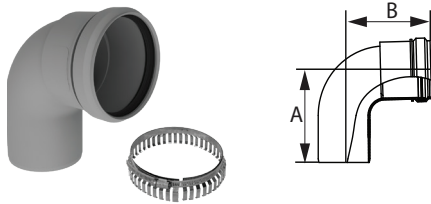

Offsets around obstructions as needed. Includes 1 Locking Clamp.

| SIZE       | ORDER #   | STOCK #   | A                | B                |
|------------|-----------|-----------|------------------|------------------|
| 2"   60mm  | 2PPS-E90C | 810014483 | 4"   100mm       | 4"   100mm       |
| 3"   80mm  | 3PPS-E90C | 810014529 | 4 5/16"   110mm  | 4 5/16"   110mm  |
| 4"   100mm | 4PPS-E90C | 810014596 | 4 1/2"   115mm   | 4 1/2"   115mm   |
| 5"   130mm | 5PPS-E90C | 810014657 | 6 3/4"   169mm   | 5 15/16"   152mm |
| 6"   150mm | 6PPS-E90C | 810014690 | 7 1/4"   183mm   | 6 1/2"   166mm   |
| 8"   200mm | 8PPS-E90C | 810014808 | 8 15/16"   227mm | 7 3/4"   195mm   |


## Black UV Resistant 90° Elbow

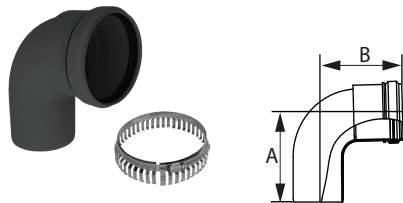

Offsets around obstructions as needed. Made of UV resistant polypropylene. May be used for terminations. Order Bird Guard Screen to protect opening when used as termination. Includes 1 Locking Clamp.

| SIZE       | ORDER #    | STOCK #   | A               | B               |
|------------|------------|-----------|-----------------|-----------------|
| 2"   60mm  | 2PPS-E90BC | 810014484 | 4"   100mm      | 4"   100mm      |
| 3"   80mm  | 3PPS-E90BC | 810014539 | 4 5/16"   110mm | 4 5/16"   110mm |
| 4"   100mm | 4PPS-E90BC | 810014597 | 4 1/2"   115mm  | 4 1/2"   115mm  |
| 6"   150mm | 6PPS-E90BC | 810014691 | 7 1/4"   183mm  | 6 1/2"   166mm  |


## Black UV Resistant Extended 90° Elbow



Made of UV resistant polypropylene. May be used for terminations. Order Bird Guard Screen to protect opening when used as termination. Includes 1 Locking Clamp.

| SIZE       | ORDER #     | STOCK #   | A               | B                |
|------------|-------------|-----------|-----------------|------------------|
| 2"   60mm  | 2PPS-E90EBC | 810014485 | 14"   358mm     | 16"   405mm      |
| 3"   80mm  | 3PPS-E90EBC | 810014540 | 14 1/4"   360mm | 16 5/16"   415mm |
| 4"   100mm | 4PPS-E90EBC | 810014598 | 14 1/4"   360mm | 16 1/2"   420mm  |

## Condensate Drain

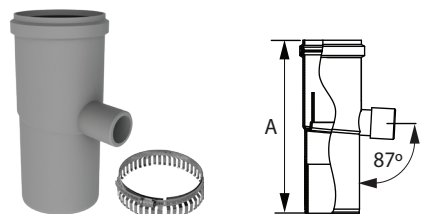

Use to remove corrosive condensates from within the vent system. 1-1/4" OD drain outlet. Includes 1 Locking Clamp. For 8" systems - use 8PPS-T with 8PPS-CD Tee Cap Drain.

| SIZE       | ORDER #  | STOCK #   | A          | SIZE       | ORDER #  | STOCK #   | A          |
|------------|----------|-----------|------------|------------|----------|-----------|------------|
| 2"   50mm  | 2PPS-CDC | 810014502 | 7"   180mm | 5"   130mm | 5PPS-CDC | 810014666 | 7"   180mm |
| 3"   80mm  | 3PPS-CDC | 810014557 | 7"   180mm | 6"   150mm | 6PPS-CDC | 810014699 | 7"   180mm |
| 4"   100mm | 4PPS-CDC | 810014618 | 7"   180mm |            |          |           |            |

## Tee Cap



Use cap on Tees, Condensate Drain or on other components where a cap is needed.

| SIZE       | ORDER # | STOCK #   | SIZE       | ORDER # | STOCK #   |
|------------|---------|-----------|------------|---------|-----------|
| 2"   60mm  | 2PPS-C  | 810004103 | 5"   130mm | 5PPS-C  | 810004226 |
| 3"   80mm  | 3PPS-C  | 810004142 | 6"   150mm | 6PPS-C  | 810006177 |
| 4"   100mm | 4PPS-C  | 810004185 | 8"   200mm | 8PPS-C  | 810004292 |


## Tee Cap w/Condensate Drain



Use cap on Tees, Condensate Drain or on other components where a cap is needed.

| SIZE       | ORDER # | STOCK #   |
|------------|---------|-----------|
| 8"   200mm | 8PPS-CD | 810004291 |


## Tee w/ Cap



Use for a 90° offset or to combine connections. Includes 2 Locking Clamps.

| SIZE       | ORDER # | STOCK #   | A                | SIZE       | ORDER # | STOCK #   | A                 |
|------------|---------|-----------|------------------|------------|---------|-----------|-------------------|
| 2"   60mm  | 2PPS-TC | 810014493 | 7"   180mm       | 5"   130mm | 5PPS-TC | 810014661 | 11"   280mm       |
| 3"   80mm  | 3PPS-TC | 810014530 | 7 7/8"   200mm   | 6"   150mm | 6PPS-TC | 810014693 | 11"   280mm       |
| 4"   100mm | 4PPS-TC | 810014607 | 8 11/16"   220mm | 8"   200mm | 8PPS-TC | 810014810 | 13 13/16"   350mm |


## Black UV Resistant Tee



Use as a termination. Made of UV resistant polypropylene. Gasket not included. Bird Screen sold separately.

| SIZE       | ORDER #  | STOCK #   | A                |
|------------|----------|-----------|------------------|
| 2"   60mm  | 2PPS-TBC | 810014494 | 7"   180mm       |
| 3"   80mm  | 3PPS-TBC | 810014549 | 7 7/8"   200mm   |
| 4"   100mm | 4PPS-TBC | 810014608 | 8 11/16"   220mm |

## Black Termination Tee



Use as a termination. Manufactured with two female ends to accept Bird Screen on both ends. Use bird screen to protect openings. Made of UV resistant polypropylene. Includes 2 Bird Guard Screens. For Single Wall Vertical Terminations see pg 339.

| SIZE       | ORDER #   | STOCK #   | A      | B      | C      | D      |
|------------|-----------|-----------|--------|--------|--------|--------|
| 2"   60mm  | 2PPS-TTBL | 810014459 | 8"     | 3 1/2" | 3 1/2" | 2 3/8" |
| 3"   80mm  | 3PPS-TTBL | 810014460 | 8 5/8" | 4"     | 3 3/8" | 3 1/8" |
| 4"   100mm | 4PPS-TTBL | 810014461 | 9 3/4" | 4 3/8" | 4 3/8" | 3 7/8" |



## Black UV Resistant Termination Tee



Use as a termination. Manufactured with two female ends to accept Bird Screen on both ends. Use bird screen to protect openings. Made of UV resistant polypropylene. Includes 2 Bird Guard Screens.

| SIZE       | ORDER #   | STOCK #   |
|------------|-----------|-----------|
| 6"   150mm | 6PPS-TTBC | 810014696 |


## Black Wall Plate



Use to trim wall penetration. Painted black metal with gasket.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-WPB | 810004112 | 4"   100mm | 4PPS-WPB | 810004195 |
| 3"   80mm | 3PPS-WPB | 810004152 |            |          |           |



## Black Wall Plate for Twin Pipes



Use to trim wall penetration when using two pipes. Painted black metal with gaskets.

| SIZE       | ORDER #  | STOCK #   | A          | B               | C              |
|------------|----------|-----------|------------|-----------------|----------------|
| 2"   60mm  | 2PPS-WPT | 810004113 | 2"   60mm  | 11 7/8"   302mm | 8 1/2"   216mm |
| 3"   80mm  | 3PPS-WPT | 810004153 | 3"   80mm  | 11 7/8"   302mm | 8 1/2"   216mm |
| 4"   100mm | 4PPS-WPT | 810004196 | 4"   100mm | 12 7/8"   327mm | 8 1/2"   216mm |


## Tee w/ Drain Cap



Use to remove corrosive condensates from within the vent system at the bottom of a vertical stack. 1-1/4" OD drain outlet. Includes 2 Locking Clamps.

| SIZE       | ORDER #   | STOCK #   | SIZE       | ORDER #   | STOCK #   |
|------------|-----------|-----------|------------|-----------|-----------|
| 2"   60mm  | 2PPS-TCDC | 810014495 | 5"   130mm | 5PPS-TCDC | 810014662 |
| 3"   80mm  | 3PPS-TCDC | 810014550 | 6"   150mm | 6PPS-TCDC | 810014694 |
| 4"   100mm | 4PPS-TCDC | 810014609 | 8"   200mm | 8PPS-TCDC | 810014811 |


## Reducer



Use to transition the vent system to a smaller diameter. Includes 1 Adapter Connector clamp.

| SIZE                    | ORDER #  | STOCK #   | A                |
|-------------------------|----------|-----------|------------------|
| 3" - 2"   80mm - 60mm   | 3PPS-R2L | 810009714 | 5"   130mm       |
| 4" - 3"   100mm - 80mm  | 4PPS-R3L | 810009746 | 5"   130mm       |
| 5" - 4"   130mm - 100mm | 5PPS-R4L | 810009764 | 7 5/8"   193mm   |
| 6" - 5"   150mm - 130mm | 6PPS-R5L | 810009785 | 7 3/4"   197mm   |
| 8" - 6"   200mm - 150mm | 8PPS-R6L | 810009801 | 5 15/16"   150mm |


## Increaser



Use to transition the vent system to a larger diameter. Install in vertical orientation only. Includes 1 Adapter Connector clamp.

| SIZE                    | ORDER #  | STOCK #   | A               |
|-------------------------|----------|-----------|-----------------|
| 2" - 3"   60mm - 80mm   | 2PPS-X3L | 810009694 | 4 5/16"   110mm |
| 3" - 4"   80mm - 100mm  | 3PPS-X4L | 810009722 | 4 5/16"   110mm |
| 4" - 5"   100mm - 130mm | 4PPS-X5L | 810009754 | 4 5/16"   110mm |
| 5" - 6"   130mm - 150mm | 5PPS-X6L | 810009771 | 4 5/16"   110mm |
| 6" - 8"   150mm - 200mm | 6PPS-X8L | 810009792 | 5 3/4"   145mm  |


### 6" Fulton EDR 750-1500 to 6" PolyPro Appliance Adapter



Use to connect 6" diameter PolyPro vent system to the Fulton EDR 750-1600 model appliance. No adapter connector and/or locking Clamp required. Hose clamps on both ends.

| SIZE       | ORDER #           | STOCK #   | A                |
|------------|-------------------|-----------|------------------|
| 6"   150mm | 6PPS-FULTEDR-6PPF | 810010023 | 5 15/16"   151mm |

### 8" Fulton EDR 2000 to 8" PolyPro Appliance Adapter



Use to connect 8" diameter PolyPro vent system to the Fulton EDR 2000 model appliance. No adapter connector and/or locking Clamp required. Hose clamps on both ends.

| SIZE       | ORDER #           | STOCK #   | A                |
|------------|-------------------|-----------|------------------|
| 8"   200mm | 8PPS-FULTEDR-8PPF | 810010025 | 5 15/16"   151mm |

### Appliance Adapter for PVC Pipe



Use to connect PolyPro vent system to an appliance outlet. Double female adapter - one end accepts PVC male pipe and the other accepts PolyPro male pipe. Locking Clamp is required on the female PP end.

| SIZE       | ORDER #   | STOCK #   |
|------------|-----------|-----------|
| 3"   80mm  | 3PPS-AD-M | 810007169 |
| 4"   100mm | 4PPS-AD-M | 810007170 |


### Appliance Adapter for PVC Coupler



Use to adapt rigid PolyPro pipe length to the inside of the PVC/CPVC coupler or other plastic/metal appliance outlet. Must be used with Adapter Connector for flue gas. Includes 1 Adapter Connector clamp.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-ADL | 810009672 | 4"   100mm | 4PPS-ADL | 810009728 |
| 3"   80mm | 3PPS-ADL | 810009699 |            |          |           |


### VSM Adapter



Use to adapt from 110mm (4") (Non-DuraVent) PolyPro to DuraVent's 100mm (4") PolyPro. Adapter Connector sold separately.

| SIZE        | ORDER #    | STOCK #   | A          | B              | C              |
|-------------|------------|-----------|------------|----------------|----------------|
| 4"   100 mm | PPS-VSM-AD | 810006942 | 4"   102mm | 4 3/8"   110mm | 4 3/8"   110mm |


### Female Appliance Adapter



Use to connect PolyPro to a nominal sized pipe with a smooth male end outlet. No adapter connector and/or Locking Clamp required. Hose clamps on both ends.

| SIZE       | ORDER #    | STOCK #   | A                | B          | C          |
|------------|------------|-----------|------------------|------------|------------|
| 3"   80mm  | FSAAU3-3PP | 810004171 | 3 1/2"   81mm    | 3"   80mm  | 5"   130mm |
| 4"   100mm | FSAAU4-4PP | 810004210 | 4"   100mm       | 4"   100mm | 5"   130mm |
| 6"   150mm | FSAAU6-6PP | 810004283 | 5 15/16"   151mm | 6"   150mm | 5"   130mm |
| 8"   200mm | FSAAU8-8PP | 810004312 | 7 15/16"   199mm | 8"   200mm | 5"   130mm |


### Male PVC Appliance Adapter



Use to connect PolyPro vent system to a standard stainless steel appliance outlet equipped with an integrated hose clamp and gasket. Must be used with Adapter Connector for flue gas, unless a clamp is supplied on the appliance outlet. Same O.D. as PVC.

| SIZE            | ORDER #         | STOCK #   | A               | B               | C                |
|-----------------|-----------------|-----------|-----------------|-----------------|------------------|
| 3" to 2"   80mm | 3PPS-03PVC-2PPF | 810007345 | 2 2/5"   61mm   | 3 1/2"   89mm   | 6"   150mm       |
| 3" to 3"   80mm | 3PPS-03PVC-3PPF | 810004167 | 3 3/16"   81mm  | 3 1/2"   89mm   | 6 13/16"   173mm |
| 4"   100mm      | 4PPS-04PVC-4PPF | 810004207 | 4"   102mm      | 4 1/2"   114mm  | 6 13/16"   173mm |
| 5"   125mm      | 5PPS-05PVC-5PPF | 810004245 | 5 3/16"   132mm | 5 9/16"   141mm | 6 13/16"   173mm |
| 6"   150mm      | 6PPS-06PVC-6PPF | 810004281 | 6"   152mm      | 6 5/8"   168mm  | 6 13/16"   173mm |
| 8"   200mm      | 8PPS-08PVC-8PPF | 810004310 | 8"   203mm      | 8 5/8"   219mm  | 6 15/16"   176mm |


### Female PVC Appliance Adapter



Use to directly connect PolyPro to a male PVC Pipe appliance outlet. Seals on the O.D. of the PVC pipe and has a clamp. No adapter connector and/or Locking Clamp required.

| SIZE       | ORDER #         | STOCK #   | A                | B                |
|------------|-----------------|-----------|------------------|------------------|
| 5"   130mm | 5PPS-05PVC-5PPF | 810004244 | 5"   130mm       | 5 11/16"   144mm |
| 6"   150mm | 6PPS-06PVC-6PPF | 810004280 | 5 15/16"   151mm | 6 11/16"   170mm |
| 8"   200mm | 8PPS-08PVC-8PPF | 810004309 | 7 15/16"   132mm | 7 7/8"   200mm   |

### FasNSeal Adapter



Use to transition from FasNSeal vent system to PolyPro vent system. Can be used as an appliance adapter or inline. No Locking Clamp required.

| SIZE       | ORDER #      | STOCK #   | A                | B          | C                |
|------------|--------------|-----------|------------------|------------|------------------|
| 3"   80mm  | FSA-03M-2PPF | 810004170 | 2 3/8"   60mm    | 3"   76mm  | 6 1/8"   156mm   |
| 3"   80mm  | FSA-03M-3PPF | 810004169 | 3 3/16"   81mm   | 3"   76mm  | 5 15/16"   151mm |
| 4"   100mm | FSA-04M-4PPF | 810004209 | 4"   100mm       | 4"   100mm | 5 15/16"   151mm |
| 5"   130mm | FSA-05M-5PPF | 810004247 | 5 3/16"   132mm  | 5"   130mm | 5 15/16"   151mm |
| 6"   150mm | FSA-06M-6PPF | 810007030 | 5 15/16"   151mm | 6"   150mm | 6"   150mm       |
| 7"   178mm | FSA-07M-6PPF | 810004463 | 6 13/16"   173mm | 7"   178mm | 6 5/16"   160mm  |
| 8"   200mm | FSA-08M-8PPF | 810007031 | 8"   200mm       | 8"   200mm | 6"   150mm       |


## PolyPro-To-FasNSeal Adapter



Use to transition from PolyPro vent system to FasNSeal vent system or to connect a metric appliance to FasNSeal. Can be used as an appliance adapter or inline. Includes 1 Locking Clamp.

| SIZE       | ORDER #          | STOCK #   | A          | B                | C                |
|------------|------------------|-----------|------------|------------------|------------------|
| 3"   80mm  | 3PPS-ADM-03FNSFC | 810014536 | 3"   80mm  | 3 1/8"   79mm    | 3 13/16"   97mm  |
| 4"   100mm | 4PPS-ADM-04FNSFC | 810014593 | 4"   100mm | 3 15/16"   99mm  | 5 15/16"   151mm |
| 5"   130mm | 5PPS-ADM-05FNSFC | 810014655 | 5"   130mm | 5 1/8"   131mm   | 5 15/16"   151mm |
| 6"   150mm | 6PPS-ADM-06FNSFC | 810014686 | 6"   150mm | 5 15/16"   151mm | 7"   178mm       |
| 8"   200mm | 8PPS-ADM-08FNSFC | 810014804 | 8"   200mm | 7 7/8"   199mm   | 7"   178mm       |


## Adapter Connector

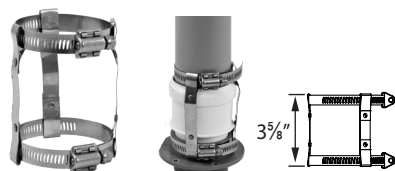

Use to secure PolyPro pipe to PVC/CPVC coupler or appliance outlet. Universal size for 2-4 inch and 5-8 inch systems. DuraVent requires its use with flue gas applications and recommends it with air intake applications.

| SIZE                   | ORDER # | STOCK #   | SIZE                    | ORDER #  | STOCK #   |
|------------------------|---------|-----------|-------------------------|----------|-----------|
| 2" - 4"   60mm - 100mm | PPS-PAC | 810004128 | 5" - 8"   130mm - 200mm | PPS-PACL | 810004243 |

## Wall Strap - Metal

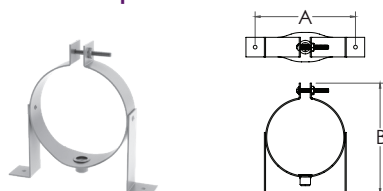

Use to support single-wall and concentric offsets and pipe used in vertical rise or horizontal runs as per installation instructions. Wall Strap legs can be rotated up to 360° for versatility. Accepts standard 3/8" all-thread. Available in galvanized or stainless steel metals. Note: Vent pipe must be supported at least every 10 feet (3m) vertically. Horizontal or sloped sections of vent pipe require a wall strap on each pipe section.

| SIZE       | GALVANIZED |           | A              | B              | SIZE       | STAINLESS STEEL |           | A              | B              |
|------------|------------|-----------|----------------|----------------|------------|-----------------|-----------|----------------|----------------|
|            | ORDER #    | STOCK #   |                |                |            | ORDER #         | STOCK #   |                |                |
| 2"   60mm  | 2PPS-WSM1  | 810014342 | 3 5/8"   92mm  | 4 7/8"   124mm | 2"   60mm  | 2PPS-WSM-SS1    | 810014348 | 3 5/8"   92mm  | 4 7/8"   124mm |
| 3"   80mm  | 3PPS-WSM1  | 810014343 | 4 3/8"   112mm | 5 1/4"   133mm | 3"   80mm  | 3PPS-WSM-SS1    | 810014349 | 4 3/8"   112mm | 5 1/4"   133mm |
| 4"   100mm | 4PPS-WSM1  | 810014344 | 5 1/8"   130mm | 5 5/8"   143mm | 4"   100mm | 4PPS-WSM-SS1    | 810014350 | 5 1/8"   130mm | 5 5/8"   143mm |
| 5"   130mm | 5PPS-WSM1  | 810014345 | 6 3/8"   162mm | 6 3/4"   171mm | 5"   130mm | 5PPS-WSM-SS1    | 810014351 | 6 3/8"   162mm | 6 3/4"   171mm |
| 6"   150mm | 6PPS-WSM1  | 810014346 | 7 1/8"   181mm | 7 5/8"   194mm | 6"   150mm | 6PPS-WSM-SS1    | 810014352 | 7 1/8"   181mm | 7 5/8"   194mm |
| 8"   200mm | 8PPS-WSM1  | 810014347 | 9 1/8"   232mm | 9 5/8"   245mm | 8"   200mm | 8PPS-WSM-SS1    | 810014353 | 9 1/8"   232mm | 9 5/8"   245mm |


## Locking Clamp



Use to secure two sections of uncut pipe together. Required to comply with ULC S636 listed installations.

| SIZE       | ORDER # | STOCK #   | SIZE       | ORDER # | STOCK #   |
|------------|---------|-----------|------------|---------|-----------|
| 2"   60mm  | 2PPS-LC | 810014835 | 5"   130mm | 5PPS-LC | 810014838 |
| 3"   80mm  | 3PPS-LC | 810014836 | 6"   150mm | 6PPS-LC | 810014839 |
| 4"   100mm | 4PPS-LC | 810014837 | 8"   200mm | 8PPS-LC | 810014840 |



## Locking Band Clamp



Use for connecting cut sections of pipe together. Also convenient for connection pipe sections used in extended vertical installations.

| SIZE       | ORDER #  | STOCK #   | A              | B             |
|------------|----------|-----------|----------------|---------------|
| 2"   60mm  | 2PPS-LBC | 810007146 | 2 3/8"   60mm  | 2 1/2"   64mm |
| 3"   80mm  | 3PPS-LBC | 810007147 | 3 1/8"   80mm  | 2 1/2"   64mm |
| 4"   100mm | 4PPS-LBC | 810007148 | 4"   100mm     | 2 1/2"   64mm |
| 5"   130mm | 5PPS-LBC | 810004242 | 5 1/8"   130mm | 2 1/2"   64mm |
| 6"   150mm | 6PPS-LBC | 810004278 | 6 1/8"   156mm | 2 1/2"   64mm |
| 8"   200mm | 8PPS-LBC | 810004306 | 8 1/8"   207mm | 2 1/2"   64mm |


## Firestop Spacer



Use when penetrating floor levels. Two piece design for easier installation.

| SIZE       | SINGLE-WALL PIPE |           | A               | B               |
|------------|------------------|-----------|-----------------|-----------------|
|            | ORDER #          | STOCK #   |                 |                 |
| 2"   60mm  | 2PPS-FSS         | 810004115 | 4"   100mm      | 7"   178mm      |
| 3"   80mm  | 3PPS-FSS         | 810004155 | 4"   100mm      | 7"   178mm      |
| 4"   100mm | 4PPS-FSS         | 810004198 | 4"   100mm      | 7"   178mm      |
| 5"   130mm | 5PPS-FSS         | 810004234 | 8 1/8"   206mm  | 10"   254mm     |
| 6"   150mm | 6PPS-FSS         | 810004269 | 7 3/4"   197mm  | 9 3/4"   248mm  |
| 8"   200mm | 8PPS-FSS         | 810004298 | 10 1/2"   267mm | 12 3/4"   324mm |



## Storm Collar



Use to create a weather tight seal between the pipe and flashing. To be used with Black Termination Tee.

| SIZE | ORDER # | STOCK #   |
|------|---------|-----------|
| 2"   | FSCPP2  | 810014467 |
| 3"   | FSCPP3  | 810014468 |
| 4"   | FSCPP4  | 810014469 |


## Tall Cone Finishing



Use to create a weather-tight penetration where the vent passes through a flat roof. Roof Jack and Storm Collar required. To be used with Black Termination Tee.

| SIZE | ORDER # | STOCK #   | A      |
|------|---------|-----------|--------|
| 2"   | FSAFPP2 | 810014470 | 4 1/3" |
| 3"   | FSAFPP3 | 810014471 | 5 1/3" |
| 4"   | FSAFPP4 | 810014472 | 6 1/3" |


## Steep Roof Flashing

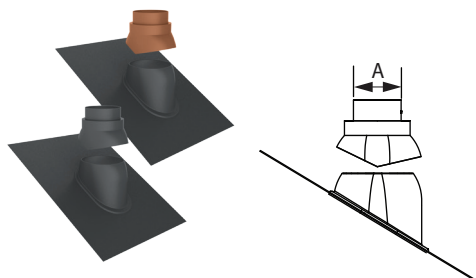

Use to weather proof penetration of vent through the roof. For concentric pipe. Made of polypropylene. Adjusts from 5/12 to 12/12. Black or terra-cotta. UV resistant.

| SIZE                    | BLACK       |           | A          |
|-------------------------|-------------|-----------|------------|
|                         | ORDER #     | STOCK #   |            |
| 2" x 4"   60mm x 100mm  | 2PPS-F12    | 810004118 | 4"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPS-F12    | 810004158 | 5"   130mm |
| 4" x 6"   100mm x 150mm | 4PPS-F12    | 810004201 | 6"   150mm |
| SIZE                    | TERRA-COTTA |           | A          |
|                         | ORDER #     | STOCK #   |            |
| 2" x 4"   60mm x 100mm  | 2PPS-F12-TC | 810004119 | 4"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPS-F12-TC | 810004159 | 5"   130mm |
| 4" x 6"   100mm x 150mm | 4PPS-F12-TC | 810004202 | 6"   150mm |


## Flat Roof Flashing

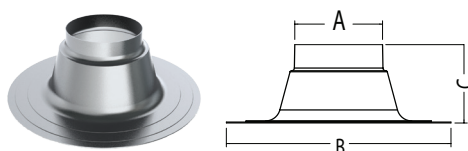

Use to weather-proof the penetration of vent pipe through the roof. For use with concentric terminations only.

| SIZE                    | ORDER # | STOCK #   | A              | B               | C              |
|-------------------------|---------|-----------|----------------|-----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPS-FF | 810004116 | 4 5/8"   117mm | 13 3/4"   349mm | 5 7/8"   149mm |
| 3" x 5"   80mm x 130mm  | 3PPS-FF | 810004156 | 5 3/8"   137mm | 15 3/8"   391mm | 5 7/8"   149mm |
| 4" x 6"   100mm x 150mm | 4PPS-FF | 810004199 | 6 5/8"   168mm | 16 7/8"   429mm | 5 7/8"   149mm |


## Twin Pipe Termination

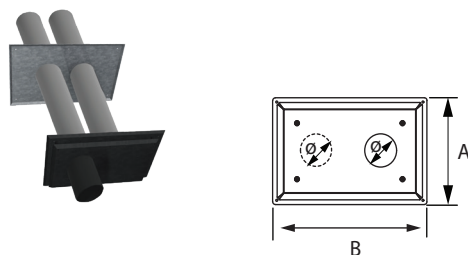

Use to terminate horizontally with two single-wall PolyPro pipes for intake and exhaust. Simple design ensures adequate separation of intake air from exhaust. Termination is painted black. Includes black UV resistant polypropylene exhaust nozzle equipped with Bird Screen, interior wall plate, and two 12" pipe lengths.

| SIZE       | ORDER #   | STOCK #   | A              | B               |
|------------|-----------|-----------|----------------|-----------------|
| 2"   60mm  | 2PPS-HTPC | 810014491 | 8 1/2"   216mm | 11 7/8"   302mm |
| 3"   80mm  | 3PPS-HTPC | 810014547 | 8 1/2"   216mm | 11 7/8"   302mm |
| 4"   100mm | 4PPS-HTPC | 810014605 | 8 1/2"   216mm | 12 1/4"   311mm |

## Single Horizontal Termination

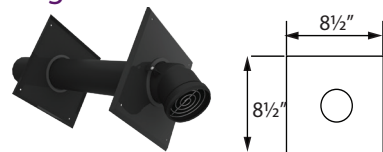

Use to terminate horizontally with one single-wall PolyPro pipe. Termination and wall plate can be rotated to suit application. Elbow is UV resistant black with bird screen. Also includes interior wall plate, and 14" length of pipe.

| SIZE      | ORDER #   | STOCK #   |
|-----------|-----------|-----------|
| 2"   60mm | 2PPS-HSTC | 810014490 |
| 3"   80mm | 3PPS-HSTC | 810014546 |


### Lochinvar Horizontal Termination Kit



Use to adapt PolyPro to the Ipx 636 low profile termination. Kit includes 14" pipe welded to an adapter and metal backing plate. Check with appliance manufacturer for approval. (Outer IPEX termination cap not included. Supplied by others.)

| SIZE       | ORDER #   | STOCK #   | A                | B              |
|------------|-----------|-----------|------------------|----------------|
| 2"   60mm  | 2PPS-HLKC | 810014489 | 14 3/16"   360mm | 8 5/8"   220mm |
| 3"   80mm  | 3PPS-HLKC | 810014545 | 14 3/16"   360mm | 8 5/8"   220mm |
| 4"   100mm | 4PPS-HLKC | 810014604 | 14 3/16"   360mm | 8 5/8"   220mm |


### Vertical Termination Cap Kit - Concentric

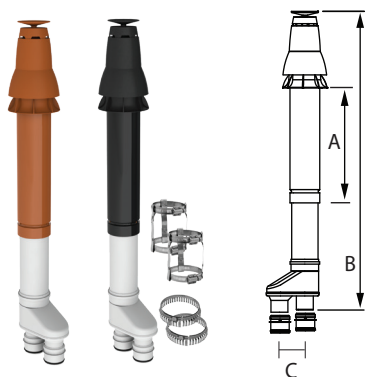

Use for concentric vertical terminations. Includes 2 appliance adapters and co-linear adapter. Black or terra-cotta cap. UV resistant. No storm collar required when installed with factory PolyPro flashing. Includes 2 Locking Clamps and 2 Adapter Connector clamps.

| SIZE                    | BLACK       |           | A           | B                | C              |
|-------------------------|-------------|-----------|-------------|------------------|----------------|
|                         | ORDER #     | STOCK #   |             |                  |                |
| 2" x 4"   60mm x 100mm  | 2PPS-VKC    | 810014497 | 18"   460mm | 50 1/4"   1280mm | 4 3/4"   121mm |
| 3" x 5"   80mm x 125mm  | 3PPS-VKC    | 810014553 | 23"   580mm | 53 1/4"   1354mm | 4 3/4"   121mm |
| 4" x 6"   100mm x 150mm | 4PPS-VKC    | 810014611 | 23"   580mm | 68 1/4"   1735mm | 5 1/2"   140mm |
| SIZE                    | TERRA-COTTA |           | A           | B                | C              |
|                         | ORDER #     | STOCK #   |             |                  |                |
| 2" x 4"   60mm x 100mm  | 2PPS-VK-TCC | 810014498 | 18"   460mm | 50 1/4"   1280mm | 4 3/4"   121mm |
| 3" x 5"   80mm x 125mm  | 3PPS-VK-TCC | 810014554 | 23"   580mm | 53 1/4"   1354mm | 4 3/4"   121mm |
| 4" x 6"   100mm x 150mm | 4PPS-VK-TCC | 810014612 | 23"   580mm | 68 1/4"   1735mm | 5 1/2"   140mm |


### Vertical Termination Kit Without Adapters

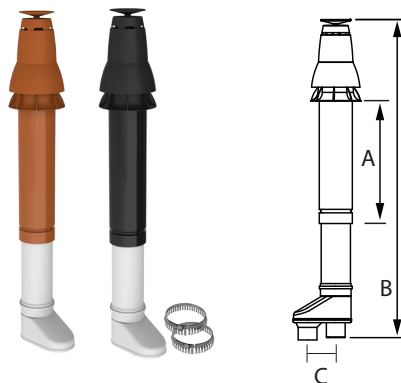

Use for concentric vertical terminations. Includes co-linear adapter and 2 Locking Clamps. Black or terra-cotta cap. UV resistant. No storm collar required when installed with factory PolyPro flashing.

| SIZE                    | BLACK         |           | A           | B                | C              |
|-------------------------|---------------|-----------|-------------|------------------|----------------|
|                         | ORDER #       | STOCK #   |             |                  |                |
| 2" x 4"   60mm x 100mm  | 2PPS-VKC-N    | 810014525 | 18"   460mm | 50 1/4"   1280mm | 4 3/4"   121mm |
| 3" x 5"   80mm x 130mm  | 3PPS-VKC-N    | 810014584 | 23"   580mm | 53 1/4"   1354mm | 4 3/4"   121mm |
| 4" x 6"   100mm x 150mm | 4PPS-VKC-N    | 810014649 | 23"   580mm | 68 1/4"   1735mm | 5 1/2"   140mm |
| SIZE                    | TERRA-COTTA   |           | A           | B                | C              |
|                         | ORDER #       | STOCK #   |             |                  |                |
| 2" x 4"   60mm x 100mm  | 2PPS-VK-TCC-N | 810014526 | 18"   460mm | 50 1/4"   1280mm | 4 3/4"   121mm |
| 3" x 5"   80mm x 130mm  | 3PPS-VK-TCC-N | 810014585 | 23"   580mm | 53 1/4"   1354mm | 4 3/4"   121mm |
| 4" x 6"   100mm x 150mm | 4PPS-VK-TCC-N | 810014650 | 23"   580mm | 68 1/4"   1735mm | 5 1/2"   140mm |


## Horizontal Termination Kit - Concentric

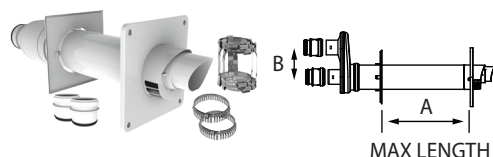

Use for concentric horizontal terminations. Includes 2 appliance adapters, white wall plate, white firestop, and co-linear adapter. White Termination with Bird Guard Screen. UV resistant. Inner plate is 8 5/8" (220mm) square, outer plate is 9 7/16" (240mm) square for all flue sizes. Includes 2 Locking Clamps and two Adapter Connector clamps. Adapters included to transition from PVC appliance outlet to twin pipe PolyPro.

| SIZE                    | ORDER #  | STOCK #   | A               | B              |
|-------------------------|----------|-----------|-----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPS-HKC | 810014488 | 13 3/4"   350mm | 4 3/4"   121mm |
| 3" x 5"   80mm x 130mm  | 3PPS-HKC | 810014544 | 13"   330mm     | 4 3/4"   121mm |
| 4" x 6"   100mm x 150mm | 4PPS-HKC | 810014603 | 13 3/4"   350mm | 5 1/2"   140mm |

## Horizontal Termination Kit Without Adapters



Use for concentric horizontal terminations. Includes white wall plate, 2 Locking Clamps, white firestop, and co-linear adapter. White Termination with Bird Guard Screen. UV resistant. Inner plate is 8 5/8" (220mm) square, outer plate is 9 7/16" (240mm) square for all flue sizes.

| SIZE                    | ORDER #    | STOCK #   | A               | B              |
|-------------------------|------------|-----------|-----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPS-HKC-N | 810014527 | 13 3/4"   350mm | 4 3/4"   121mm |
| 3" x 5"   80mm x 130mm  | 3PPS-HKC-N | 810014586 | 13"   330mm     | 4 3/4"   121mm |
| 4" x 6"   100mm x 150mm | 4PPS-HKC-N | 810014651 | 13 3/4"   350mm | 5 1/2"   140mm |

## Bird Guard Screen



Use to protect venting system from birds and rodents. Spring-loaded design inserts within female end of pipe in place of gasket. Stainless steel.

| SIZE      | ORDER # | STOCK #   | SIZE       | ORDER # | STOCK #   |
|-----------|---------|-----------|------------|---------|-----------|
| 2"   60mm | 2PPS-BG | 810004341 | 4"   100mm | 4PPS-BG | 810004367 |
| 3"   80mm | 3PPS-BG | 810004355 | 6"   150mm | 6PPS-BG | 810004276 |

## EPDM Replacement Gasket



Use as a replacement gasket for rigid PolyPro products. Available in packs of 12 for sizes 2" - 4". Available in packs of 6 for sizes 5" - 8".

| SIZE       | ORDER # | STOCK #   | SIZE       | ORDER # | STOCK #   |
|------------|---------|-----------|------------|---------|-----------|
| 2"   60mm  | 2PPS-GA | 810004124 | 5"   130mm | 5PPS-GA | 810004237 |
| 3"   80mm  | 3PPS-GA | 810004164 | 6"   150mm | 6PPS-GA | 810004272 |
| 4"   100mm | 4PPS-GA | 810004204 | 8"   200mm | 8PPS-GA | 810004303 |

## Viton Replacement Gasket




Alternative gasket material for oil fuel appliance applications. Available in packs of 12 for sizes 2" - 4". Available in packs of 6 for sizes 5" - 8".

| SIZE       | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|------------|----------|-----------|------------|----------|-----------|
| 2"   60mm  | 2PPS-GAV | 810004126 | 5"   130mm | 5PPS-GAV | 810004238 |
| 3"   80mm  | 3PPS-GAV | 810004165 | 6"   150mm | 6PPS-GAV | 810004273 |
| 4"   100mm | 4PPS-GAV | 810004205 | 8"   200mm | 8PPS-GAV | 810004304 |

# PolyPro Commercial Venting Components

## Vertical Termination for Commercial Systems





Exhaust termination for vertical through-the-roof applications. PolyPro pipe is protected by a sturdy outer metal pipe and integrated cap. Painted with a durable, powder coated black finish. Includes support hardware.

To complete vertical termination for commercial systems, installation requires (1) variable pitch roof flashing, (1) support clamp, and (1) storm collar.

| SIZE       | ORDER #   | STOCK #   | A           | B            | O.D.           |
|------------|-----------|-----------|-------------|--------------|----------------|
| 5"   130mm | 5PPS-VTMC | 810014664 | 29"   745mm | 62"   1575mm | 6 3/8"   162mm |
| 6"   150mm | 6PPS-VTMC | 810014697 | 29"   741mm | 62"   1575mm | 7 1/4"   184mm |
| 8"   200mm | 8PPS-VTMC | 810014813 | 32"   800mm | 63"   1600mm | 9 1/8"   232mm |


## Variable Pitch Roof Flashing



Use to weather-proof the penetration of vent pipe through the roof. For use with VTMC. For pitches of 0/12 - 9/12. Made of stainless steel.

| SIZE       | ORDER # | STOCK #   | A          | B          |
|------------|---------|-----------|------------|------------|
| 5"   130mm | FSVPF5  | 810003241 | 7"   178mm | 7"   178mm |
| 6"   150mm | FSVPF6  | 810003295 | 8"   200mm | 7"   178mm |
| 8"   200mm | FSVPF8  | 810003383 | 9"   228mm | 7"   178mm |


## Support Clamp



Use to position the Vertical Termination for Commercial Systems (VTM's) to the variable pitch roof flashing. The clamp is upsized one diameter to fit around the black metal outer pipe. The support claim rests in notched groove of variable pitch roof flashing.

| SIZE       | ORDER # | STOCK #   | A             |
|------------|---------|-----------|---------------|
| 5"   130mm | FSCL6   | 810003288 | 1 1/2"   38mm |
| 6"   150mm | FSCL7   | 810003332 | 1 1/2"   38mm |
| 8"   200mm | FSCL9   | 810003414 | 1 1/2"   38mm |

## Flat Roof Flashing



Use to weather-proof the penetration of vent pipe through the roof. For use with concentric terminations only.

| SIZE       | SINGLE-WALL PIPE |           | A              | B               | C              |
|------------|------------------|-----------|----------------|-----------------|----------------|
|            | ORDER #          | STOCK #   |                |                 |                |
| 5"   130mm | 5PPS-FF          | 810007171 | 6 1/8"   156mm | 16 7/8"   429mm | 5 7/8"   149mm |
| 6"   150mm | 6PPS-FF          | 810004268 | 6 3/4"   171mm | 16 7/8"   429mm | 5 7/8"   149mm |
| 8"   200mm | 8PPS-FF          | 810004302 | 8 7/8"   222mm | 20 1/2"   521mm | 6 7/8"   175mm |



## Storm Collar



Clamps to black metal pipe covering support clamp and creating a weather tight seal above the flashing. For use with VTM.

| SIZE       | ORDER # | STOCK #   |
|------------|---------|-----------|
| 5"   130mm | FSCPP5  | 810007172 |
| 6"   150mm | FSCPP6  | 810007173 |
| 8"   200mm | FSCPP8  | 810007174 |

## Horizontal Termination for Commercial Systems

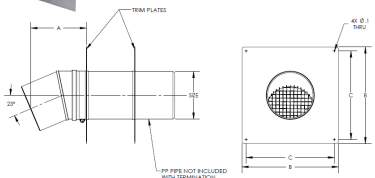

Use for through-the-wall horizontal terminations. Includes 23 degree termination elbow with integrated bird screen, inner and outer wall plates, and clamp for connecting to PolyPro pipe. No locking Clamp is required. All components are stainless steel.

| SIZE       | ORDER #   | STOCK #   | A              | B           | C           |
|------------|-----------|-----------|----------------|-------------|-------------|
| 4"   100mm | 4PPS-HSTL | 810009744 | 7 3/4"   197mm | 10"   254mm | 9"   230mm  |
| 5"   130mm | 5PPS-HSTL | 810009763 | 6 5/8"   168mm | 12"   305mm | 11"   280mm |
| 6"   150mm | 6PPS-HSTL | 810009784 | 6 7/8"   172mm | 12"   305mm | 11"   280mm |
| 8"   200mm | 8PPS-HSTL | 810009800 | 7"   178mm     | 14"   358mm | 13"   330mm |

## PolyPro Concentric Venting Components


## Concentric Vent Length



Use to vent condensing appliances.

| SIZE                    | ORDER #    | STOCK #   | A               | B              | C              |
|-------------------------|------------|-----------|-----------------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-P500  | 810005200 | 19 1/4"   490mm | 2 1/4"   60mm  | 3 7/8"   100mm |
| 2" x 4"   60mm x 100mm  | 2PPC-P1000 | 810005199 | 39"   990mm     | 2 1/4"   60mm  | 3 7/8"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPC-P500  | 810005869 | 19 1/4"   490mm | 3"   80mm      | 4 7/8"   125mm |
| 3" x 5"   80mm x 130mm  | 3PPC-P1000 | 810005868 | 39"   990mm     | 3"   80mm      | 4 7/8"   125mm |
| 4" x 6"   100mm x 150mm | 4PPC-P500  | 810005981 | 19 1/4"   490mm | 3 3/4"   100mm | 5 7/8"   150mm |
| 4" x 6"   100mm x 150mm | 4PPC-P1000 | 810005980 | 39"   990mm     | 3 3/4"   100mm | 5 7/8"   150mm |


## Telescoping Vent Length



Use to add length to a concentric vent system.

| SIZE                    | ORDER # | STOCK #   | A              | B              | C               | D               |
|-------------------------|---------|-----------|----------------|----------------|-----------------|-----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-TA | 810005201 | 2 1/4"   60mm  | 3 7/8"   100mm | 10 3/8"   265mm | 15 7/8"   405mm |
| 3" x 5"   80mm x 130mm  | 3PPC-TA | 810005870 | 3"   80mm      | 4 7/8"   125mm | 11"   280mm     | 15 1/2"   395mm |
| 4" x 6"   100mm x 150mm | 4PPC-TA | 810005982 | 3 3/4"   100mm | 5 7/8"   150mm | 11"   280mm     | 15 1/2"   395mm |


## Concentric Support Elbow

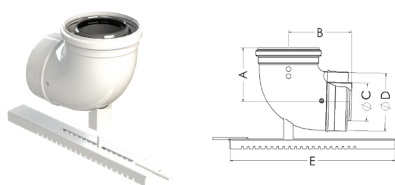

Use the support elbow to stabilize a vertical termination.

| SIZE                    | ORDER #   | STOCK #   | A              | B              | C              | D              | E               |
|-------------------------|-----------|-----------|----------------|----------------|----------------|----------------|-----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-SE90 | 810013584 | 4"   100mm     | 4 7/8"   125mm | 2 3/8"   60mm  | 3 7/8"   100mm | 13 3/4"   350mm |
| 3" x 5"   80mm x 130mm  | 3PPC-SE90 | 810013585 | 4 1/2"   115mm | 5 1/4"   135mm | 3 1/8"   80mm  | 4 3/4"   120mm | 13 3/4"   350mm |
| 4" x 6"   100mm x 150mm | 4PPC-SE90 | 810013586 | 4 1/2"   115mm | 5 3/8"   140mm | 3 7/8"   100mm | 5 7/8"   150mm | 13 3/4"   350mm |


## Concentric 45° Elbow

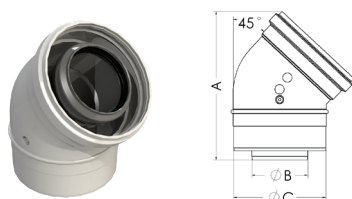

Use to vent condensing appliances. Offsets around obstructions as needed.

| SIZE                    | ORDER #  | STOCK #   | A                | B               | C               |
|-------------------------|----------|-----------|------------------|-----------------|-----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-E45 | 810005195 | 6 1/4"   160 mm  | 2 1/4"   55 mm  | 3 7/8"   100 mm |
| 3" x 5"   80mm x 130mm  | 3PPC-E45 | 810005864 | 6 3/4"   175 mm  | 3 1/4"   80 mm  | 4 7/8"   125 mm |
| 4" x 6"   100mm x 150mm | 4PPC-E45 | 810005976 | 11 1/4"   285 mm | 4 1/4"   105 mm | 5 7/8"   150 mm |


## Concentric 90° Elbow



Use to vent condensing appliances. Offsets around obstructions as needed.

| SIZE                    | ORDER #  | STOCK #   | A              | B              | C              | D              |
|-------------------------|----------|-----------|----------------|----------------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-E90 | 810005196 | 4 7/8"   125mm | 3 7/8"   100mm | 2 1/4"   60mm  | 3 3/4"   95mm  |
| 3" x 5"   80mm x 130mm  | 3PPC-E90 | 810005865 | 5 1/4"   135mm | 4 3/8"   110mm | 3"   80mm      | 4 7/8"   125mm |
| 4" x 6"   100mm x 150mm | 4PPC-E90 | 810005977 | 5 1/2"   140mm | 4 1/2"   115mm | 3 3/4"   100mm | 5 7/8"   150mm |


## Condensate Trap

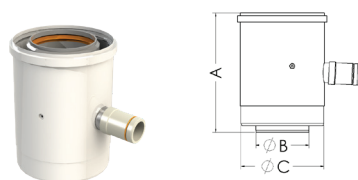

Use to remove corrosive condensates from within the vent system.

| SIZE                    | ORDER # | STOCK #   | A          | B              | C              |
|-------------------------|---------|-----------|------------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-CT | 810013421 | 7"   180mm | 2 1/4"   60mm  | 3 7/8"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPC-CT | 810013422 | 7"   180mm | 3"   80mm      | 4 7/8"   120mm |
| 4" x 6"   100mm x 150mm | 4PPC-CT | 810013423 | 7"   180mm | 3 3/4"   100mm | 5 3/4"   150mm |

## Extension with SP



Use for combustion analysis testing without drilling holes into the vent system. Port cap is threaded for easy removal. Install immediately above the appliance.

| SIZE                    | ORDER #  | STOCK #   | A          | B              | C              |
|-------------------------|----------|-----------|------------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-ESP | 810013418 | 6"   150mm | 2 1/4"   60mm  | 3 7/8"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPC-ESP | 810013419 | 6"   150mm | 3"   80mm      | 4 7/8"   120mm |
| 4" x 6"   100mm x 150mm | 4PPC-ESP | 810013420 | 6"   150mm | 3 3/4"   100mm | 5 7/8"   150mm |


## Tee With Cover



Use for a 90° offset or to combine connections.

| SIZE                    | ORDER #  | STOCK #   | A               | B              | C              |
|-------------------------|----------|-----------|-----------------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-TCD | 810013415 | 9"   230mm      | 2 1/4"   60mm  | 3 7/8"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPC-TCD | 810013416 | 10 3/4"   275mm | 3 1/8"   80mm  | 4 7/8"   125mm |
| 4" x 6"   100mm x 150mm | 4PPC-TCD | 810013417 | 11 3/4"   300mm | 3 7/8"   100mm | 5 7/8"   150mm |

## VSM Adapter

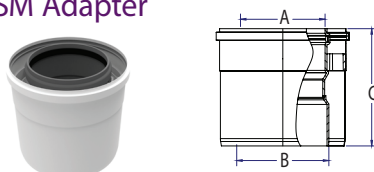

Use to adapt from 110mm x 150mm (4" x 6") (Non-DuraVent) PolyPro to DuraVent's 100mm x 150mm (4" x 6") concentricPolyPro.

| SIZE                    | ORDER #    | STOCK #   | A          | B              | C              |
|-------------------------|------------|-----------|------------|----------------|----------------|
| 4" x 6"   100mm x 150mm | PPC-VSM-AD | 810006939 | 4"   102mm | 4 3/8"   110mm | 5 1/2"   140mm |


## Adapter Increaser



Use to transition the vent system to a larger diameter. Install in vertical orientation only.

| SIZE                    | ORDER #    | STOCK #   | A              | B             | C              |
|-------------------------|------------|-----------|----------------|---------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-X3INC | 810005203 | 4 3/8"   110mm | 2 1/4"   60mm | 3 7/8"   100mm |
| 3" x 5"   80mm x 130mm  | 2PPC-X4INC | 810005204 | 4 7/8"   125mm | 2 1/4"   60mm | 3 7/8"   100mm |
| 4" x 6"   100mm x 150mm | 3PPC-X4INC | 810005873 | 4 3/8"   110mm | 3"   80mm     | 4 7/8"   125mm |


## Concentric Reducer

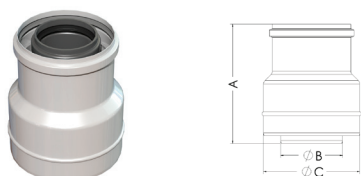

Use to transition the concentric vent system to a smaller diameter.

| SIZE                   | ORDER #    | STOCK #   | A              | B             | C              |
|------------------------|------------|-----------|----------------|---------------|----------------|
| 3" x 5"   80mm x 130mm | 3PPC-X2RED | 810014341 | 6 1/8"   156mm | 3 1/8"   80mm | 5 7/8"   150mm |


## 4x6 Vertical Termination



Use for concentric vertical terminations.

| SIZE                    | ORDER #  | STOCK #   | A                | B               | C               | D              | E              |
|-------------------------|----------|-----------|------------------|-----------------|-----------------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-VCT | 810005202 | 50 3/8"   1280mm | 16 1/2"   420mm | 27"   685mm     | 1 3/4"   60mm  | 3 7/8"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPC-VCT | 810005871 | 53 3/8"   1355mm | 16 1/2"   420mm | 34"   860mm     | 2 3/4"   80mm  | 4 7/8"   125mm |
| 4" x 6"   100mm x 150mm | 4PPC-VCT | 810005983 | 68 1/2"   1740mm | 16 1/2"   420mm | 36 5/8"   930mm | 3 3/4"   100mm | 5 7/8"   150mm |


## Concentric Horizontal Termination



Use for concentric horizontal terminations.

| SIZE                    | ORDER #  | STOCK #   | A               | B               | C              | D              |
|-------------------------|----------|-----------|-----------------|-----------------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-HCT | 810005197 | 23 3/4"   604mm | 13 5/8"   347mm | 3 7/8"   100mm | 2 1/4"   60mm  |
| 3" x 5"   80mm x 130mm  | 3PPC-HCT | 810005866 | 23 1/4"   591mm | 11 1/4"   284mm | 4 7/8"   125mm | 3 1/8"   80mm  |
| 4" x 6"   100mm x 150mm | 4PPC-HCT | 810005978 | 23 1/4"   591mm | 11 1/4"   284mm | 5 7/8"   150mm | 3 3/4"   100mm |


## Concentric Horizontal Termination Kit



Use for concentric horizontal terminations. Includes 1 meter concentric vent length, 1 concentric 90° elbow, 1 concentric horizontal termination.

| SIZE                    | ORDER #   | STOCK #   | A            | B             | C              | WALL STRAPS |
|-------------------------|-----------|-----------|--------------|---------------|----------------|-------------|
| 2" x 4"   60mm x 100mm  | 2PPC-HVKA | 810005198 | 44"   1120mm | 2"   55mm     | 3 7/8"   100mm | 1           |
| 3" x 5"   80mm x 130mm  | 3PPC-HVKA | 810005867 | 45"   1140mm | 2 3/4"   75mm | 4 7/8"   125mm | 2           |
| 4" x 6"   100mm x 150mm | 4PPC-HVKA | 810005979 | 46"   1170mm | 3 5/8"   95mm | 5 7/8"   150mm | 2           |

## Wall Strap - Metal

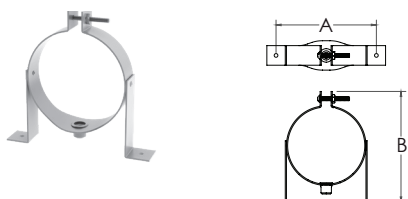

Use to support single-wall and concentric offsets and pipe used in vertical rise or horizontal runs as per installation instructions. Wall Strap legs can be rotated up to 360° for versatility. Accepts standard 3/8" all-thread. Available in galvanized or stainless steel metals. Note: Vent pipe must be supported at least every 10 feet (3m) vertically. Horizontal or sloped sections of vent pipe require a wall strap on each pipe section.

| SIZE                    | ORDER #   | STOCK #   | A              | B              |
|-------------------------|-----------|-----------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPC-WSM1 | 810014412 | 5 1/8"   130mm | 5 5/8"   143mm |
| 3" x 5"   80mm x 130mm  | 3PPC-WSM1 | 810014413 | 6 1/8"   150mm | 6 5/8"   170mm |
| 4" x 6"   100mm x 150mm | 4PPC-WSM1 | 810014414 | 7 1/8"   180mm | 7 5/8"   190mm |



## EPDM Replacement Gasket



Use as a replacement gasket for rigid PolyPro products. Available in packs of 12 for sizes 2" - 4".

| SIZE                    | ORDER # | STOCK #   |
|-------------------------|---------|-----------|
| 2" x 4"   60mm x 100mm  | 2PPS-GA | 810004124 |
| 3" x 5"   80mm x 130mm  | 3PPS-GA | 810004164 |
| 4" x 6"   100mm x 150mm | 4PPS-GA | 810004204 |


## Firestop Spacer



Use when penetrating floor levels. Two piece design for easier installation.

| SIZE                    | ORDER # | STOCK #   | A              | B              |
|-------------------------|---------|-----------|----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPS-FS | 810004114 | 7"   178mm     | 8 3/4"   223mm |
| 3" x 5"   80mm x 130mm  | 3PPS-FS | 810004154 | 7 7/8"   200mm | 9 7/8"   251mm |
| 4" x 6"   100mm x 150mm | 4PPS-FS | 810004197 | 7 7/8"   200mm | 9 7/8"   251mm |


## Flat Roof Flashing



Use to weather-proof the penetration of vent pipe through the roof. For use with concentric terminations only.

| SIZE                    | ORDER # | STOCK #   | A              | B               | C              |
|-------------------------|---------|-----------|----------------|-----------------|----------------|
| 2" x 4"   60mm x 100mm  | 2PPS-FF | 810004116 | 4 5/8"   117mm | 13 3/4"   349mm | 5 7/8"   149mm |
| 3" x 5"   80mm x 130mm  | 3PPS-FF | 810004156 | 5 3/8"   137mm | 15 3/8"   391mm | 5 7/8"   149mm |
| 4" x 6"   100mm x 150mm | 4PPS-FF | 810004199 | 6 5/8"   168mm | 16 7/8"   429mm | 5 7/8"   149mm |

## Adjustable Roof Flashing




Use to weather proof penetration of vent through the roof. For concentric pipe. Made of aluminum. Adjusts from 0/12 to 5/12.

| SIZE                    | ORDER # | STOCK #   | A          |
|-------------------------|---------|-----------|------------|
| 2" x 4"   60mm x 100mm  | 2PPS-F5 | 810004117 | 4"   100mm |
| 3" x 5"   80mm x 130mm  | 3PPS-F5 | 810004157 | 5"   130mm |
| 4" x 6"   100mm x 150mm | 4PPS-F5 | 810004200 | 6"   150mm |

# PolyPro Double-Wall Components


## Pipe



Galvanized outer jacket can be used as a conduit for single-wall PolyPro pipe. In exterior applications, provides protection from impact and UV light. Also provides some insulation value for use in colder climates. Can be field-painted if desired. Simple twist-lock assembly. To calculate installed length, subtract 1 1/2" for each joint. Includes internal metal support ring. PolyPro pipe sold separately.

| SIZE       | ORDER #   | STOCK #   | A           | B   |
|------------|-----------|-----------|-------------|-----|
| 8"   200mm | 8PPS-40DW | 810009358 | 10"   254mm | 40" |
| 8"   200mm | 8PPS-75DW | 810009359 | 10"   254mm | 75" |


## Telescoping Pipe

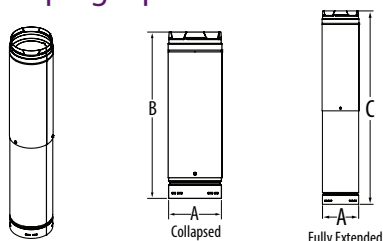

Matching telescoping section for galvanized outer jacket can be used to help achieve specific offset length or stack height. Minimum and maximum lengths vary according to diameter selected.

| SIZE       | ORDER #    | STOCK #   | A           | B   | C       |
|------------|------------|-----------|-------------|-----|---------|
| 8"   200mm | 8PPS-40DWA | 810009928 | 10"   254mm | 24" | 37 7/8" |


## Appliance Adapter

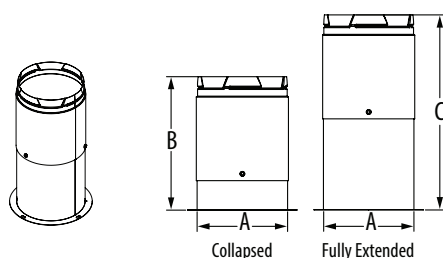

Adjustable Adapter with flange for galvanized outer jacket. Flange attaches to appliance cabinet with supplied screws. To calculate installed length, subtract 1 1/2" for each joint.

| SIZE       | ORDER #   | STOCK #   | A           | B      | C       |
|------------|-----------|-----------|-------------|--------|---------|
| 8"   200mm | 8PPS-ADDW | 810009931 | 10"   254mm | 9 3/4" | 14 1/4" |


## 90° Elbow

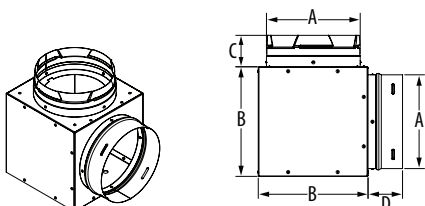

Adjustable Adapter with flange for galvanized outer jacket. Flange attaches to appliance cabinet with supplied screws. To calculate installed length, subtract 1 1/2" for each joint. Includes metal support ring.

| SIZE       | ORDER #    | STOCK #   | A           | B       | C      | D  |
|------------|------------|-----------|-------------|---------|--------|----|
| 8"   200mm | 8PPS-E90DW | 810009361 | 10"   254mm | 11 1/4" | 2 3/8" | 3" |


## 45° Elbow

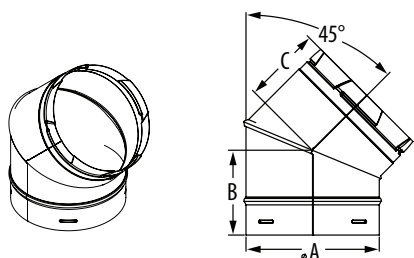

Galvanized outer jacket 45 degree elbow. Includes metal support ring. To calculate installed length, subtract 1 1/2" for each joint.

| SIZE       | ORDER #    | STOCK #   | A           | B              | C              |
|------------|------------|-----------|-------------|----------------|----------------|
| 8"   200mm | 8PPS-E45DW | 810009360 | 10"   254mm | 4 1/2"   115mm | 4 3/8"   110mm |


## Wall Strap

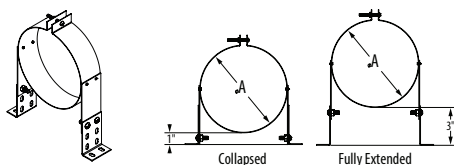

Use in interior or exterior installations to add lateral support to PolyPro DW Pipe. Adjusts to provide a 1"-3" clearance to combustibles and maintain proper slope. Additional clearance can be increased with optional PPS-WSMDW-EXT.

| SIZE                     | ORDER #    | STOCK #   | A           |
|--------------------------|------------|-----------|-------------|
| 8" - 10"   200mm - 254mm | 8PPS-WSMDW | 810009919 | 10"   254mm |


## Wall Strap Extension

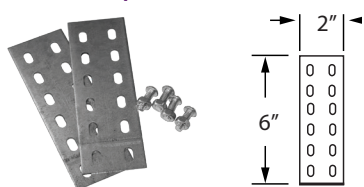

Use with Wall-Strap if additional mounting clearances or slope is required. Universal design fits all sizes.

| SIZE                    | ORDER #       | STOCK #   |
|-------------------------|---------------|-----------|
| 5" - 8"   130mm - 200mm | PPS-WSMDW-EXT | 810010086 |


## Elbow Strap

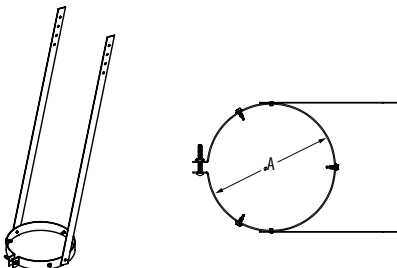

Used to support galvanized outer jacket when 45° elbows are used for offset purposes.

| SIZE       | ORDER #   | STOCK #   | A           |
|------------|-----------|-----------|-------------|
| 8"   200mm | 8PPS-ESDW | 810009949 | 10"   254mm |


## Adjustable Roof Flashing

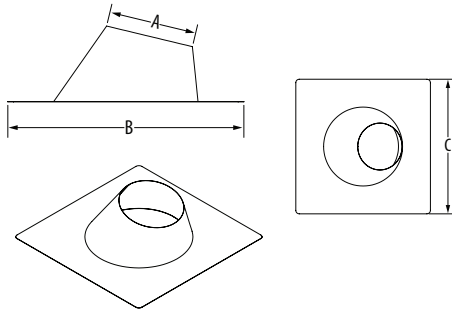

Use to weather-proof the penetration of the galvanized outer jacket through the roof. Made of galvalume.

| SIZE       | FLASHING            |           |              |
|------------|---------------------|-----------|--------------|
|            | ORDER #             | STOCK #   | PITCH        |
| 8"   200mm | 8PPS-FDW            | 810009925 | 0/12 - 6/12  |
| SIZE       | FLASHING STEEP ROOF |           |              |
|            | ORDER #             | STOCK #   | PITCH        |
| 8"   200mm | 8PPS-FSRDW          | 810009934 | 7/12 - 12/12 |


## Storm Collar

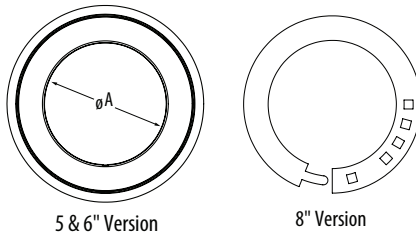

Used to maintain a weather tight, resistant seal between the galvanized outer jacket and flashing.

| SIZE       | ORDER #   | STOCK #   | A           |
|------------|-----------|-----------|-------------|
| 8"   200mm | 8PPS-SCDW | 810009943 | 10"   254mm |


## Firestop Spacer



Use when penetrating walls or floor levels. Two piece design for easier installation.

| SIZE       | SPACER HZ  |           |                 |                 |                 |
|------------|------------|-----------|-----------------|-----------------|-----------------|
|            | ORDER #    | STOCK #   | A               | B               | C               |
| 8"   200mm | 8PPS-FSSDW | 810010080 | 10 1/8"   253mm | 14 5/8"   366mm | 17 1/8"   428mm |


## Firestop Support

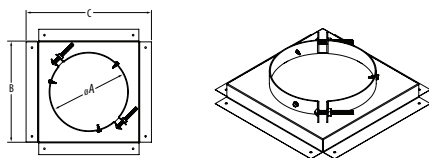

Use when penetrating floor levels with Double-Wall PolyPro and provide support at the ceiling level. Includes clamp that supports and prevents pipe sections from slipping down.

| SIZE       | SUP. ASSEMBLY |           |             |             |                 |
|------------|---------------|-----------|-------------|-------------|-----------------|
|            | ORDER #       | STOCK #   | A           | B           | C               |
| 8"   200mm | 8PPS-FSDW     | 810009922 | 10"   254mm | 12"   305mm | 14 1/8"   353mm |


Roof Support

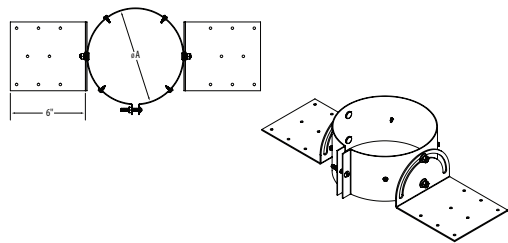

Used to support galvanized outer jacket and PolyPro vent within at the roof level. Adjustable to different roof pitches. Ideal for cathedral ceilings.

| SIZE       | ORDER #   | STOCK #   | A           |
|------------|-----------|-----------|-------------|
| 8"   200mm | 8PPS-RSDW | 810010341 | 10"   254mm |


Horizontal Trim Plate

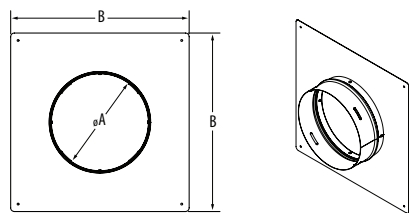

Used to trim interior wall penetration and transition from Double-Wall PolyPro (interior) to single wall pipe or Horizontal Termination (exterior). Includes built-in female twist-lock connection.

| SIZE       | ORDER #    | STOCK #   | A           | B           |
|------------|------------|-----------|-------------|-------------|
| 8"   200mm | 8PPS-HSTDW | 810010077 | 10"   254mm | 14"   358mm |


Vertical Termination

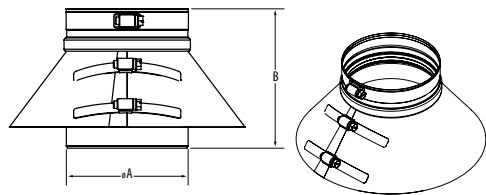

Use to vertically terminate a Double-Wall PolyPro system. Includes a AL29-4C stainless steel termination pipe with collar.

| SIZE       | ORDER #   | STOCK #   | A              | B          |
|------------|-----------|-----------|----------------|------------|
| 8"   200mm | 8PPS-VTDW | 810009940 | 7 7/8"   200mm | 7"   178mm |

# PolyPro Flex Venting Components

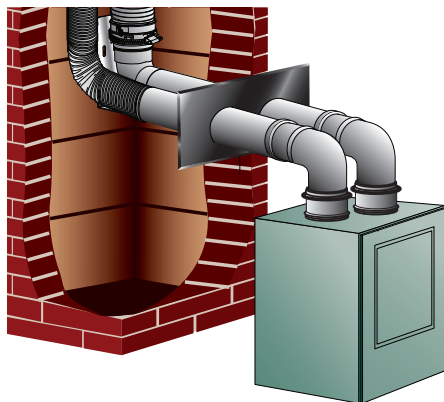

## Need An Air Intake Solution? Create Your Own Kit

Order DuraFlex AL length, Hanger Bracket, Coupler and Wall Plate for Twin Pipe. (2" Air intake will require a 2"-3" Increaser: 2PPS-X3)

- (1) DuraFlex AL Length: DFA-25, DFA-35, or DFA-50
- (1) Hanger Bracket: DFA-FCB
- (1) Coupler DFA-FCP
- (1) Wall Plate for Twin Pipe: PPS-WPT


## Flex Chimney Lining Kit



Use for a vertical flex lining system. Includes black, UV resistant chimney cap, rigid flue vent, flex support bracket, 4 spacers in 3" & 4" kits, male and female flex adapters with gaskets, extended support elbow, wall plate, appliance adapter, Locking Clamp, and Adapter Connector clamp. Flex sold separately.

| SIZE       | ORDER #  | STOCK #   |
|------------|----------|-----------|
| 2"   60mm  | 2PPS-FKC | 810014487 |
| 3"   80mm  | 3PPS-FKC | 810014541 |
| 4"   100mm | 4PPS-FKC | 810014599 |
| 5"   130mm | 5PPS-FKC | 810014658 |


## Chimney Cap

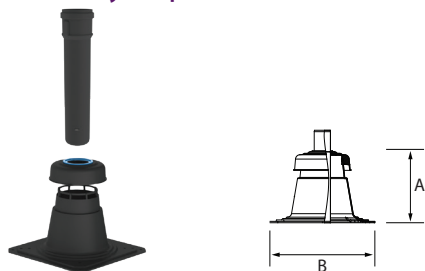

Use to vertically terminate a flex system. Black, UV resistant chimney cap with rigid steel flue vent.

| SIZE       | ORDER #   | STOCK #   | A              | B               |
|------------|-----------|-----------|----------------|-----------------|
| 2"   60mm  | 2PPS-FCTC | 810014486 | 9 3/4"   244mm | 15 1/4"   381mm |
| 3"   80mm  | 3PPS-FCTC | 810014555 | 9 3/4"   244mm | 15 1/4"   381mm |
| 4"   100mm | 4PPS-FCTC | 810014617 | 9 3/4"   244mm | 15 1/4"   381mm |
| 5"   130mm | 5PPS-FCTC | 810014665 | 7 3/4"   197mm | 15 3/4"   394mm |


## Vertical Flex Termination Cap

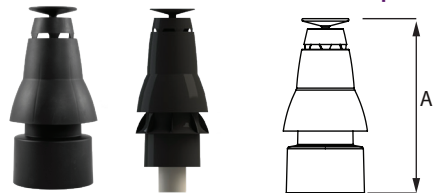

Use to vertically terminate a flex system when using the B-vent retrofit adapters. Includes male and female flex adapters and gaskets. Black, UV resistant. Match the termination size with flex diameter.

| SIZE      | ORDER #   | STOCK #   | A               |
|-----------|-----------|-----------|-----------------|
| 2"   60mm | 2PPS-VFTC | 810009691 | 13 3/4"   349mm |
| 3"   80mm | 3PPS-VFTC | 810014552 | 17"   432mm     |

## B-vent Retrofit Adapters



Use to retrofit common sizes of B-vent chimney for use as a chase for one appliance using PolyPro flex. Includes top cap adapter and bottom support cup. 3" size also includes required C-support plate.

| SIZE                            | ORDER #  | STOCK #   |
|---------------------------------|----------|-----------|
| 2"   60mm in a 3"   80mm chase  | 2PPS-BV3 | 810004332 |
| 2"   60mm in a 4"   100mm chase | 2PPS-BV4 | 810004333 |
| 2"   60mm in a 5"   130mm chase | 2PPS-BV5 | 810004334 |
| 3"   80mm in a 5"   130mm chase | 3PPS-BV5 | 810004348 |
| 2"   60mm in a 6"   150mm chase | 2PPS-BV6 | 810006999 |
| 3"   80mm in a 6"   150mm chase | 3PPS-BV6 | 810005874 |


## Support Elbow



Use the support elbow to stabilize a vertical termination. Elbow has integrated support base that is compatible with bracket or support shown on the following page. Includes 1 Locking Clamp.

| SIZE       | ORDER #    | STOCK #   | SIZE       | ORDER #    | STOCK #   |
|------------|------------|-----------|------------|------------|-----------|
| 5"   130mm | 5PPS-SE90C | 810014659 | 8"   200mm | 8PPS-SE90C | 810014809 |
| 6"   150mm | 6PPS-SE90C | 810014692 |            |            |           |

## Support Elbow Extended



Use the extended support elbow to stabilize the vertical termination. Extended horizontal length can be trimmed to length as required. Elbow has integrated support base that is compatible with Support Bracket or Chimney Support shown. Includes 1 Locking Clamp.

| SIZE       | ORDER #     | STOCK #   | A                 |
|------------|-------------|-----------|-------------------|
| 2"   60mm  | 2PPS-SE90XC | 810014492 | 21 11/16"   551mm |
| 3"   80mm  | 3PPS-SE90XC | 810014548 | 22 1/4"   565mm   |
| 4"   100mm | 4PPS-SE90XC | 810014606 | 22 7/16"   570mm  |
| 5"   130mm | 5PPS-SE90XC | 810014660 | 24 7/16"   620mm  |

## Flex or Rigid Support Bracket



Use to secure the Support Elbow or the Extended Support Elbow inside a masonry chimney or chase. Heavy Duty.

| SIZE                 | ORDER # | STOCK #   |
|----------------------|---------|-----------|
| 2"-8"   60mm - 200mm | PPS-SUP | 810004225 |


## Flex Chimney Support



Use to support the Support Elbow inside a masonry chimney or chase. Includes mounting hardware and pipe support clamp.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-SUP | 810004338 | 4"   100mm | 4PPS-SUP | 810004364 |
| 3"   80mm | 3PPS-SUP | 810004352 | 5"   130mm | 5PPS-SUP | 810004375 |

Flex Support Bracket



Use to support PolyPro Flex from top of masonry chimney or chase.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-FSB | 810004335 | 4"   100mm | 4PPS-FSB | 810004361 |
| 3"   80mm | 3PPS-FSB | 810004349 | 5"   130mm | 5PPS-FSB | 810004373 |

Spacer



Use to center PolyPro flex. Universal for all diameters. Simple installation and ratchet adjustment. For 3" & 4" diameters, use 3PPS-S.

| SIZE      | ORDER # | STOCK #   | SIZE      | ORDER # | STOCK #   |
|-----------|---------|-----------|-----------|---------|-----------|
| 2"   60mm | 2PPS-S  | 810004336 | 3"   80mm | 3PPS-S  | 810004350 |

Flex Length



Use to line masonry chimneys that vent condensing appliances. Double-wall construction. Can be cut to precise length in the field. Available in 25, 35 or 50 foot lengths. 5" diameter flex comes in rolls of 98 feet only.

| SIZE       | 25 FEET     |           | 35 FEET     |           |
|------------|-------------|-----------|-------------|-----------|
|            | ORDER #     | STOCK #   | ORDER #     | STOCK #   |
| 2"   60mm  | 2PPS-FLEX25 | 810004318 | 2PPS-FLEX35 | 810004319 |
| 3"   80mm  | 3PPS-FLEX25 | 810004321 | 3PPS-FLEX35 | 810004322 |
| 4"   100mm | 4PPS-FLEX25 | 810004324 | 4PPS-FLEX35 | 810004325 |
| SIZE       | 50 FEET     |           | 82 FEET     |           |
|            | ORDER #     | STOCK #   | ORDER #     | STOCK #   |
| 2"   60mm  | 2PPS-FLEX50 | 810004320 | -           | -         |
| 3"   80mm  | 3PPS-FLEX50 | 810004323 | -           | -         |
| 4"   100mm | -           | -         | 4PPS-FLEX   | 810004326 |
| SIZE       | 98 FEET     |           |             |           |
|            | ORDER #     | STOCK #   |             |           |
| 5"   130mm | 5PPS-FLEX   | 810004327 |             |           |

Flex Adapter Kit



Use with PolyPro flex lining system. Includes one male and one female adapter. These allow you to switch from rigid pipe to flex at the base of the system and back to rigid at the top. Flex gaskets (2) included.

| SIZE       | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|------------|----------|-----------|------------|----------|-----------|
| 3"   80mm  | 3PPS-FAS | 810009373 | 5"   130mm | 5PPS-FAS | 810007033 |
| 4"   100mm | 4PPS-FAS | 810005987 |            |          |           |

## Flex Male Adapter



Use to connect PolyPro rigid pipe to PolyPro flex at the base of the system. Flex gasket included.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-FAM | 810004329 | 4"   100mm | 4PPS-FAM | 810004358 |
| 3"   80mm | 3PPS-FAM | 810004344 | 5"   130mm | 5PPS-FAM | 810004370 |

## Flex Female Adapter



Use to convert from PolyPro flex back to PolyPro rigid pipe towards the top of the vent system. Flex gasket included.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-FAF | 810004330 | 4"   100mm | 4PPS-FAF | 810004359 |
| 3"   80mm | 3PPS-FAF | 810004345 | 5"   130mm | 5PPS-FAF | 810004371 |


## Flex Coupler Adapter



Use to tightly connect one length of PolyPro flex to another. Two flex gaskets are included.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-FAC | 810004331 | 4"   100mm | 4PPS-FAC | 810004360 |
| 3"   80mm | 3PPS-FAC | 810004346 | 5"   130mm | 5PPS-FAC | 810004372 |

## Wall Plate

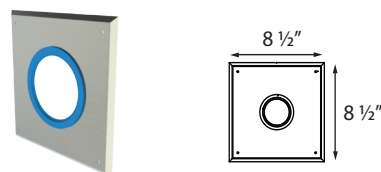

Use to trim wall penetration. Includes silicone seal for tight seal. Aluminum construction. White finish. Can be painted to suit.

| SIZE      | ORDER # | STOCK #   | SIZE       | ORDER # | STOCK #   |
|-----------|---------|-----------|------------|---------|-----------|
| 2"   60mm | 2PPS-WP | 810004339 | 4"   100mm | 4PPS-WP | 810004365 |
| 3"   80mm | 3PPS-WP | 810004353 | 5"   130mm | 5PPS-WP | 810004376 |

## Viton Replacement Gasket Flex



Use as a replacement gasket for PolyPro flex products. Sold in packs of 12.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-GAF | 810004340 | 4"   100mm | 4PPS-GAF | 810004366 |
| 3"   80mm | 3PPS-GAF | 810004354 | 5"   130mm | 5PPS-GAF | 810004377 |

## Gaskets



Use as a replacement gasket for PolyPro Wall Plates. Sold in packs of 12

| SIZE       | ORDER #  | STOCK #   |
|------------|----------|-----------|
| 2"   60mm  | 2PPS-GAW | 810004423 |
| 3"   80mm  | 3PPS-GAW | 810004424 |
| 4"   100mm | 4PPS-GAW | 810004425 |

Flex Puller




Use with the provided rope to guide PolyPro flex lengths down masonry chimney. 2" version snaps onto flex, 3"-5" version twist-locks onto the male flex adapter.

| SIZE      | ORDER # | STOCK #   | SIZE       | ORDER # | STOCK #   |
|-----------|---------|-----------|------------|---------|-----------|
| 2"   60mm | 2PPS-FP | 810004342 | 4"   100mm | 4PPS-FP | 810004368 |
| 3"   80mm | 3PPS-FP | 810004356 | 5"   130mm | 5PPS-FP | 810004378 |

PolyPro Multi-Flex Venting System


Reline Upper Plate



Use to seal pipe penetration with gasket, plate needs to be silicone sealed and fastened to (field fabricated) support plate.

| SIZE      | ORDER #  | STOCK #   | SIZE       | ORDER #  | STOCK #   |
|-----------|----------|-----------|------------|----------|-----------|
| 2"   60mm | 2PPS-RPU | 810007982 | 4"   100mm | 4PPS-RPU | 810007963 |
| 3"   80mm | 3PPS-RPU | 810007983 |            |          |           |

Reline Hanger Support



Use to support flex under the support plate. Clamps around the flex and is fastened to the support plate, then covered by the reline upper plate at the correct size. Universal for 2" - 4" diameters.

| SIZE                   | ORDER # | STOCK #   |
|------------------------|---------|-----------|
| 2" - 4"   60mm - 100mm | PPS-RH  | 810007965 |