

SPECIFICATIONS

COIL DATA

RATED COIL VOLTAGE 24 VOLTS 50/60 Hz
 NOMINAL COIL CURRENT 50 ma
 PICK UP VOLTAGE 19.2 VOLTS MAX
 DROP OUT VOLTAGE 7.2 VOLTS MIN
 NOMINAL OPERATING POWER 1.20 VA

CONTACTS

CONTACT MATERIAL GOLD-CLAD
 SILVER NICKEL


CONTACTS (4 FORM C) 4 PDT
 RATING (RESISTIVE) 5A 250V AC
 BREAKDOWN VOLTAGE
 BETWEEN CONTACT SETS 700V RMS
 BETWEEN CONTACTS AND COIL 1500V RMS
 BETWEEN LIVE PARTS AND GROUND 1500V RMS

AMBIENT TEMPERATURE


-58°F TO +122°F

EXPECTED LIFE (MIN OPERATIONS)

AT 1A RMS 2,000,000

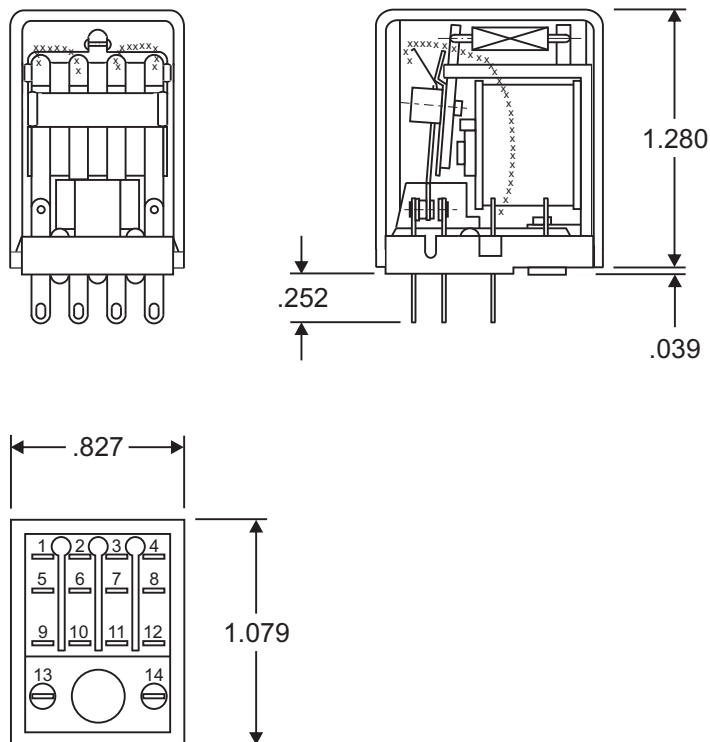

SCHEMATIC

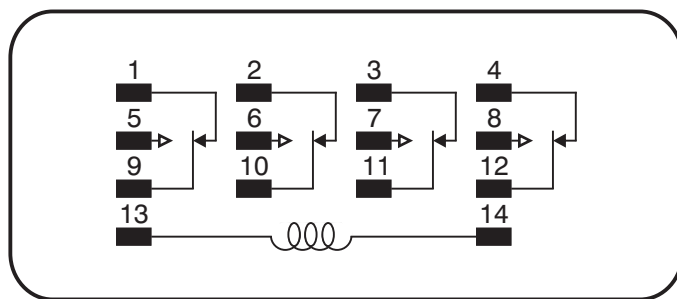

SUBMITTAL FORM

SUBMITTED BY: _____

JOB: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____