

The ACK check valve is a normally closed magnetic check valve that prevents reverse refrigerant flow in liquid lines and compressor discharge lines.




Features

- Copper Connection Sizes 1/4" through 2-5/8"
- Hermetic Spun Copper Design
- Magnetic Checking Action
- Built-In 30 Mesh Stainless Steel Strainer
- Can Be Installed In Any Position

Specifications

- UL/CUL File number: SA 5312

Dimensional Data

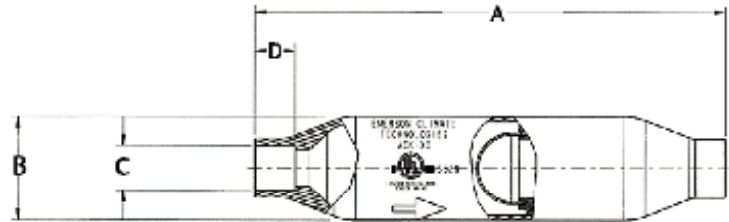

Nomenclature example: ACK-4

ACK	4
Check Valve Series	Copper ODF Connection Size (in 1/16")

Ordering Information and Dimensional Data (in)

PCN	Description	Connection Size	A	B	C	D	Opening Pressure (oz/sq in)	Opening Pressure (psig)	MWP (psig)	Nominal Tons R-22 Suction 40°F @ 1 psi	Nominal Tons R-22 Liquid 40°F @ 1 psi	Cv
064985	ACK-4	1/4 ODF	4.00	0.88	0.254 ± 0.002	0.19	1.20	0.08	800	0.40	2.60	0.9
064986	ACK-6	3/8 ODF			0.379 ± 0.002	0.40				1.30	0.08	0.60
064987	ACK-8	1/2 ODF	5.00	1.13	0.504 ± 0.002	0.31	3.50	0.22	680	1.20	9.40	3.1
064988	ACK-10	5/8 ODF			0.629 ± 0.002	0.50				1.40	13	3.6
064989	ACK-12	3/4 ODF	7.00	1.63	0.754 ± 0.002	0.63	3.80	0.24	680	3.30	27	8.0
064990	ACK-14	7/8 ODF			0.879 ± 0.003	0.42				3.70	29	9.2
064991	ACK-18	1-1/8 ODF	8.38	2.13	1.130 ± 0.003	0.94	6.80	0.43	680	6	51	15.4
064992	ACK-22	1-3/8 ODF	9.38	2.63	1.380 ± 0.003	1.04	10.20	0.64	680	9.50	79	23.8
064993	ACK-26	1-5/8 ODF	10.50	3.13	1.630 ± 0.003	1.07	11.40	0.71	680	17	102	24.2
064994	ACK-34	2-1/8 ODF	12.00	3.63	2.130 ± 0.003	1.34	18.10	1.13	680	30	213	38.7
064995	ACK-42	2-5/8 ODF	13.00	4.13	2.630 ± 0.003	1.50	23.00	1.44	680	50	375	71.7

Cross Reference (Identical Lay-In)

Emerson	A-1 Components	Superior
ACK-4	MS-4	900M-4S
ACK-6	MS-6	900M-6S
ACK-8	MS-8	900M-8S
ACK-10	MS-10	900M-10S
ACK-12	MS-12	900M-12S
ACK-14	MS-14	900M-14S
ACK-18	MS-18	N/A
ACK-22	MS-22	N/A
ACK-26	MS-26	N/A
ACK-34	MS-34	N/A
ACK-42	MS-42	N/A