

PRESS SWING CHECK VALVES

- Lead Free Compliant
- One-Piece Body Design
- EPDM O-Ring Seal
- Heavy Pattern Cast Brass



Press Swing Check Valve

- One-piece body design
- EPDM o-ring seal
- Heavy pattern cast brass construction
- Lead free brass material
- Metal to metal disc seal
- 200 WOG
- Max Temp: 248°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
400R012-NL	1/2"	Press Swing Check Valve	10	160
400R034-NL	3/4"	Press Swing Check Valve	10	120
400R001-NL	1"	Press Swing Check Valve	5	60
400R114-NL	1-1/4"	Press Swing Check Valve	5	40
400R112-NL	1-1/2"	Press Swing Check Valve	5	30
400R002-NL	2"	Press Swing Check Valve	2	24

Press Ball Valve With Drain
Full Port Lead Free

- Lead free DZR brass material
- Full port forged brass body
- 250 WOG
- Max Temp: 203°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
310D012-NL	1/2"	Press Ball Valve	5	50
310D034-NL	3/4"	Press Ball Valve	5	40
310D001-NL	1"	Press Ball Valve	4	20

Press x MIP Ball Valve
Full Port Lead Free

- Lead free DZR brass material
- Full port forged brass body
- 250 WOG / 150 WSP
- Max Temp: 203°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
320M012-NL	1/2"	Press Ball Valve	5	50
320M034-NL	3/4"	Press Ball Valve	5	40
320M001-NL	1"	Press Ball Valve	4	20
320M114-NL	1-1/4"	Press Ball Valve	5	20
320M112-NL	1-1/2"	Press Ball Valve	4	16
320M002-NL	2"	Press Ball Valve	2	8

Press Ball Valve
Full Port Lead Free

- Lead free DZR brass material
- UPC NSF1-8
- Double O-Ring
- Blow Out Proof Stem
- 250 CWP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
310R012-NL	1/2"	Full Port Press Ball Valve	5	50
310R034-NL	3/4"	Full Port Press Ball Valve	5	40
310R001-NL	1"	Full Port Press Ball Valve	4	20
310R114-NL	1-1/4"	Full Port Press Ball Valve	5	20
310R112-NL	1-1/2"	Full Port Press Ball Valve	4	16
310R002-NL	2"	Full Port Press Ball Valve	2	8
310R212-NL	2-1/2"	Full Port Press Ball Valve	1	6
310R003-NL	3"	Full Port Press Ball Valve	1	4
310R004-NL	4"	Full Port Press Ball Valve	1	2

Press x FIP Ball Valve
Full Port Lead Free

- Lead free DZR brass material
- Full port forged brass body
- 250 WOG
- Max Temp: 203°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
320T012-NL	1/2"	Press Ball Valve	5	50
320T034-NL	3/4"	Press Ball Valve	5	40
320T001-NL	1"	Press Ball Valve	4	20
320T114-NL	1-1/4"	Press Ball Valve	5	20
320T112-NL	1-1/2"	Press Ball Valve	4	16
320T002-NL	2"	Press Ball Valve	2	8

NOW AVAILABLE PRESS COPPER FITTINGS

ONE PIECE GAS VALVE

One piece brass body for leak resistance and long valve life.



One Piece Gas Ball Valve

- One-piece brass body
- Female NPT x Female NPT
- PTFE ball seats
- Blow out proof brass stem
- Pressure Rating: 175 GAS
- Max Temp: -4° F to 149° F

- Thread conforms to ANSI B1.20.1
- Approvals: ANSI Z21.15/CSA 9.1 for 1/2 psig, ASME B16.44/CR91-002 for 5 psig, ASME B16.33/CGA3.16 for 125 psig

RAVEN
SAFETY PRODUCTS

PART #	SIZE	DESCRIPTION	INNER	MASTER
OP4512	1/2"	FIP Gas Ball Valve	10	120
OP4534	3/4"	FIP Gas Ball Valve	10	120
OP4501	1"	FIP Gas Ball Valve	10	50



Gas Ball Valve Yellow Handle

- Forged brass body
- UL approved 125 psig, ANSI Z21.15
- CSA approved 1/2 psig / 5 psig / 125 psig
- 600 WOG / 175 GAS
- Max Temp: 149°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
4512Y	1/2"	FIP Gas Ball Valve	10	120
4534Y	3/4"	FIP Gas Ball Valve	10	120

Premium Approved Lock Handle Ball Valve Full Port Lead Free

- Lead free DZR brass material
- Threaded & sweat ends available
- CSA, UL, FM, UPC approved
- 600 WOG / 150 WSP
- Max Temp: 300°F



# SWT	# IPS	SIZE	INNER	MASTER
-	L-610T014-NL	1/4"	12	144
-	L-610T038-NL	3/8"	12	144
L-610C012-NL	L-610T012-NL	1/2"	10	100
L-610C034-NL	L-610T034-NL	3/4"	10	100
L-610C001-NL	L-610T001-NL	1"	5	50
L-610C114-NL	L-610T114-NL	1-1/4"	5	25
L-610C112-NL	L-610T112-NL	1-1/2"	5	25
L-610C002-NL	L-610T002-NL	2"	2	12
L-610C212-NL	L-610T212-NL	2-1/2"	2	8
L-610C003-NL	L-610T003-NL	3"	2	6
L-610C004-NL	L-610T004-NL	4"	2	4

Gas Ball Valve With Screw Driver Slot

- Forged brass body
- UL approved 1/2"- 3/4" 125 psig
- CSA approved 1/2 psig / 5 psig / 125 psig
- 600 WOG / 175 GAS,
- Max Temp: 149°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
S4512	1/2"	FIP Gas Ball Valve	10	50
S4534	3/4"	FIP Gas Ball Valve	10	120
S4501	1"	FIP Gas Ball Valve	10	120

Hose Ball Valve With Cap Full Port Lead Free

- Lead free DZR brass material
- Threaded & sweat ends available
- CSA/IAPMO, NSF/ANSI 372, IGC 157
- blow out proof stem
- Cap and chain included
- 600 WOG / 150 WSP
- Max Temp: 300°F



# SWT	# IPS	SIZE	INNER	MASTER
CHBV-012-NL	THBV-012-NL	1/2" x Hose	10	100
CHBV-034-NL	THBV-034-NL	3/4" x Hose	10	100

LARGE PEX BALL VALVES

1 1/4"

1 1/2"

2"

THINK
BIGASTM
F1807
CRIMP PEXPex Ball Valve
Large Diameter

- Lead free DZR brass material
- Full port forged brass body
- Blow out proof brass stem
- 600 WOG
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
600P114-NL	1-1/4"	PEX x PEX	5	25
600P112-NL	1-1/2"	PEX x PEX	5	25
600P002-NL	2"	PEX x PEX	2	12

Pex Ball Valve
PEX x SWT

- Lead free DZR brass material
- T-Handle
- 600 WOG / 150 WSP
- Max Temp: 300°F



PSBV-012-NL	1/2" x 1/2"	PEX x SWT	2	12
PSBV-034-NL	3/4" x 3/4"	PEX x SWT	5	25

Pex Ball Valve
PEX x SWT

- Lead free DZR brass material
- Lever Handle
- 600 WOG / 150 WSP
- Max Temp: 300°F



PSBL-012-NL	1/2" x 1/2"	PEX x SWT	5	25
PSBL-034-NL	3/4" x 3/4"	PEX x SWT	5	25
PSBL-001-NL	1" x 1"	PEX x SWT	2	12

Inline Check Valve
Spring Loaded

- Lead free brass body
- Sweat / Threaded
- 200 CWP
- Max Temp: 180°F



# SWT	# IPS	SIZE	INNER	MASTER
150C012-NL	150T012-NL	1/2"	10	100
150C034-NL	150T034-NL	3/4"	10	80
150C114-NL	150T114-NL	1-1/4"	6	60
150C112-NL	150T112-NL	1-1/2"	4	40
150C100-NL	150T100-NL	1"	5	30
150C200-NL	150T200-NL	2"	5	20

207 Series Gate Valve
Heavy Duty Industrial Grade

- Brass body
- Full Port
- 200 WOG
- Max Temp: 200°F



207T112-NL	1-1/2"	IPS Gate Valve	5	30
207T002-NL	2"	IPS Gate Valve	2	20
207T012	1/2"	IPS Gate Valve	10	100
207T034	3/4"	IPS Gate Valve	10	80
207T001	1"	IPS Gate Valve	5	50
207T114	1-1/4"	IPS Gate Valve	5	40
207T112	1-1/2"	IPS Gate Valve	5	30
207T002	2"	IPS Gate Valve	2	20
207T212	2-1/2"	IPS Gate Valve	1	8
207T003	3"	IPS Gate Valve	1	6
207T004	4"	IPS Gate Valve	1	4

F1960 PEX BALL VALVES

- Full Port
- Lead Free Compliant
- NSF



ASTM
F1960
EXPANSION PEX

Expansion PEX Ball Valve F1960 PEX

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
600F012-NL	1/2"	F1960 PEX	10	100
600F034-NL	3/4"	F1960 PEX	10	100
600F001-NL	1"	F1960 PEX	5	50
600F114-NL	1-1/4"	F1960 PEX	5	25
600F112-NL	1-1/2"	F1960 PEX	5	25
600F002-NL	2"	F1960 PEX	2	12

Expansion PEX Ball Valve F1960 PEX x SWT

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
FSBL-012-NL	1/2"	F1960 PEX x SWT	10	100
FSBL-034-NL	3/4"	F1960 PEX x SWT	10	100
FSBL-001-NL	1"	F1960 PEX x SWT	5	50

Expansion PEX Ball Valve F1960 PEX x FIP

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
FFBL-012-NL	1/2"	F1960 PEX x FIP	10	100
FFBL-034-NL	3/4"	F1960 PEX x FIP	10	100
FFBL-001-NL	1"	F1960 PEX x FIP	5	50

Expansion PEX Ball Valve F1960 PEX x MIP

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
FMBL-012-NL	1/2"	F1960 PEX x MIP	10	100
FMBL-034-NL	3/4"	F1960 PEX x MIP	10	100
FMBL-001-NL	1"	F1960 PEX x MIP	5	50

Expansion PEX Ball Valve F1960 PEX With Drain

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
405F012-NL	1/2"	F1960 PEX	10	100
405F034-NL	3/4"	F1960 PEX	10	100
405F001-NL	1"	F1960 PEX	5	50

Expansion PEX Drop Ear Ball Valve F1960 PEX

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
806W012-NL	1/2"	F1960 PEX	20	100
806W034-NL	3/4"	F1960 PEX	10	50

Expansion PEX Drop Ear Ball Valve F1960 PEX With Drain

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
807W012-NL	1/2"	F1960 PEX	20	100
807W034-NL	3/4"	F1960 PEX	10	50

Expansion PEX Drop Ear Ice Maker Valve F1960 PEX

- Lead free DZR brass material
- 400 WOG / 150 WSP
- Max Temp: 300°F



PART #	SIZE	DESCRIPTION	INNER	MASTER
WIMV12-NL	1/2" x 1/2" x 1/4" COMP		1	60

Water Heater Pans


Available in Aluminum & Black Plastic

- PVC Drain fitting included for 1" and 1-1/2"
- Protects your property from water damage

ALUMINUM #	PLASTIC #	SIZE	QTY
AWHP20	-	20"	10
AWHP22	PWHP22	22"	10
AWHP24	PWHP24	24"	10
AWHP26	PWHP26	26"	10
AWHP28	PWHP28	28"	10
AWHP30	-	30"	10

PVC MALE ADAPTER - W/ WASHER & LOCK NUT

PART #	SIZE	QTY
AWLN01WH	1"	100

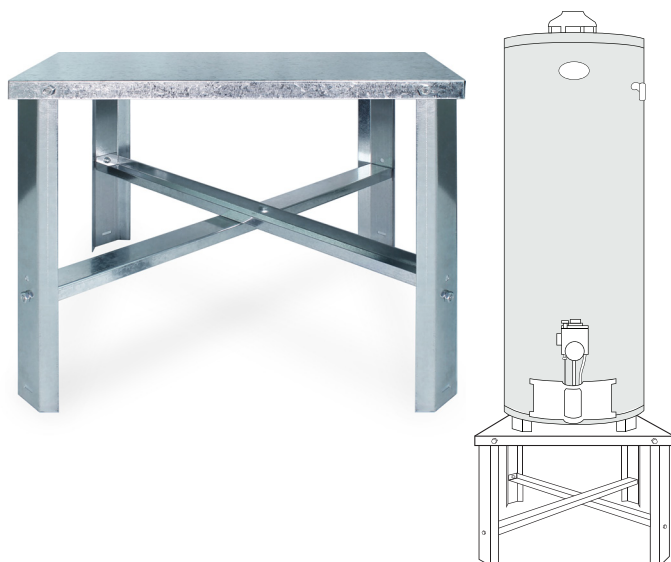

Steel Water Heater Stand


- 18 Gauge galvanized steel construction
- 650lb Load rating & up to 52 gallons
- Seismic clips included for secure mounting

PART #	SIZE	QTY
GWHS21	21" x 21" x 18"	5
GWHS24	24" x 24" x 18"	5

Steel Water Heater Straps

- Adjustable - Fits up to 80 gallon tanks
- Protect your home & family against water, fire & explosions
- Easy to install / Corrosion resistant
- Wrap around mount

PART #	SIZE	QTY
GWHSE55	UP TO 55 WITH CLIP	8
GWHSE80	UP TO 80 WITH CLIP	8

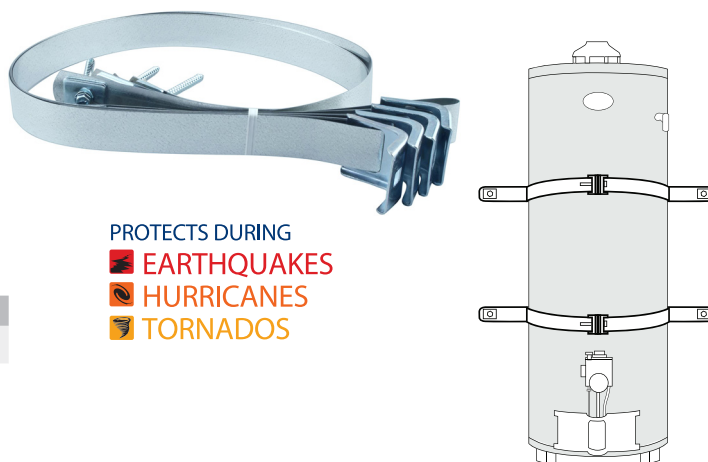

PROTECTS DURING
 EARTHQUAKES
 HURRICANES
 TORNADOS



Higher-Quality PTFE Sealing Tape

- Protects against rust and corrosion
- Creates a permanent, watertight seal

Designed for threads made from galvanized steel, iron, brass, copper, aluminum, stainless steel, polyethylene, polypropylene, PVC, CPVC, ABS, fiberglass and more.

White PTFE Sealing Tape

- Thicker professional-grade density
- No need for pipe dope
- Easy to apply



PART #	SIZE	INNER	MASTER
TTC12520	1/2" x 520	25	250
TTC34520	3/4" x 520	25	250
TTC1296	1/2" x 1296	25	250

Gray PTFE Sealing Tape

- Thicker professional-grade density
- No need for pipe dope
- Easy to apply



PART #	SIZE	INNER	MASTER
TTC12520G	1/2" x 520	25	250
TTC34520G	3/4" x 520	25	250
TTC1296G	1/2" x 1296	25	250
TTC3496G	3/4" x 1296	25	250

Boiler Plug

- Boiler tube plug
- Cast iron body
- Square head for wrench



PART #	SIZE	INNER	MASTER
BP200	2"	8	16
BP212	2-1/2"	24	48
BP300	3"	5	10

Lead Plug


- Lead "Fit All" plug
- Cast iron body
- Square head for wrench



PART #	SIZE	INNER	MASTER
LP200	2"	24	48
LP212	2-1/2"	24	48
LP300	3"	12	24
LP312	3-1/2"	12	24
LP400	4"	6	12
LP412	4-1/2"	6	12
LP500	5"	1	8
LP512	5-1/2"	1	8
LP600	6"	1	8

Universal Thermocouples

- For gas furnaces and 30 millivolt systems
- Positive positioning for quick insertion
- Includes adapter fittings
- Heavy-duty, long-lasting element
- Fits screw-in, clamp-in or push-in type pilot burners



PART #	SIZE	INNER	MASTER
TCP18	18"	1 Carded/25	100
TCP24	24"	1 Carded/25	100
TCP30	30"	1 Carded/25	100
TCP36	36"	1 Carded/25	100
TCP48	48"	1 Carded/25	100

5 Gallon Bucket

- All purpose plastic pail
- Features durable plastic construction
- Tapered for easy stacking



PART #	DESCRIPTION	INNER	MASTER
5GB	5 Gallon Bucket	1	1
5GL	5 Gallon Lid	1	1
5GBLKT	White Bucket / Blue Lid	1	1