

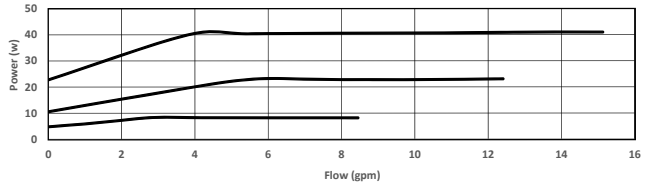
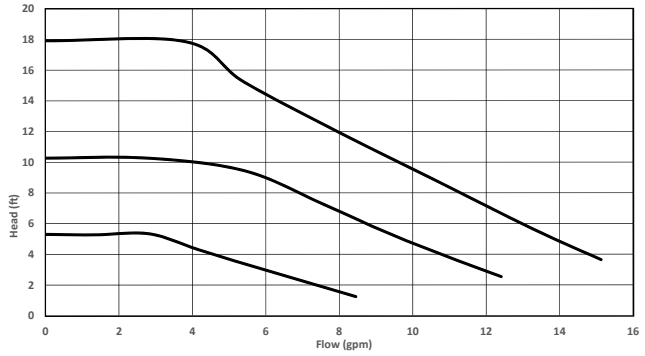
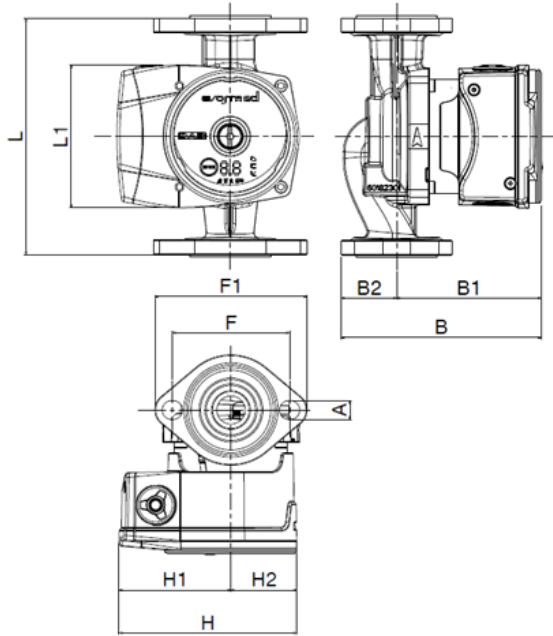


# EVOSTA2 - ELECTRONIC CIRCULATORS FOR DOMESTIC HEATING SYSTEMS - SINGLE, WITH UNIONS



Pumped liquid temperature range: from +14 °F to +230 °F - Maximum operating pressure: 145 psi 10 bar (1000 kPa)

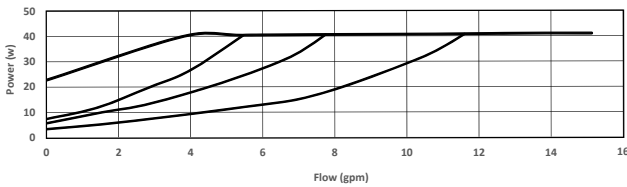

**CONSTANT SPEED**

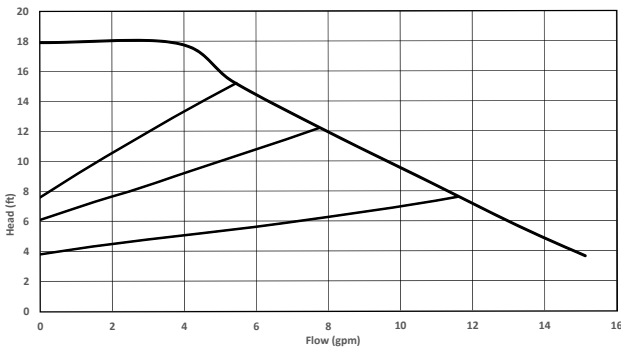

**PROPORTIONAL PRESSURE**

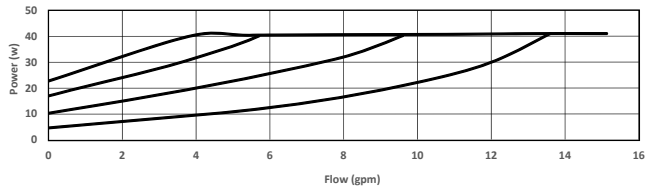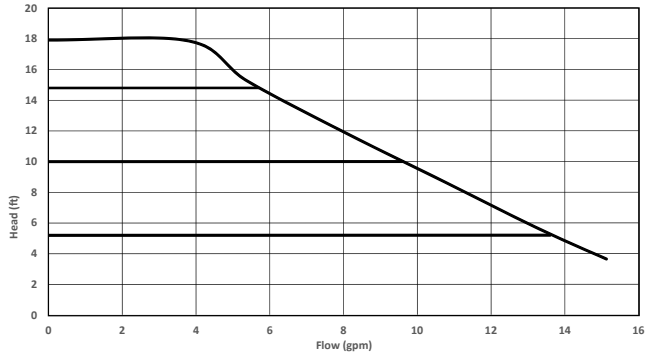

**CONSTANT PRESSURE**

The performance curves are based on kinematic viscosity values = 1 mm<sup>2</sup>/s and density equal to 1000 kg/m<sup>3</sup>. Curve tolerance according to ISO 9906.

MODEL	Q=gpm	0	2	4	6	8	10	12	14	15.12
EVOSTA 110-127v	H (ft)	17.92	17.85	17.81	14.38	11.98	9.42	7.01	4.79	3.34

MODEL	CENTRE DISTANCE	FLANGE	POWER INPUT 60 Hz	P1 MAX W	In A	EEI *	MINIMUM SUCTION PRESSURE	
							t°	194 °F
EVOSTA 110-127v	6 3/8"	OVAL 2 BOLT	1 x 110-127 V ~	4 41	0.064 0.61	EEI ≤ 0,23	ft.c.w.	32.8

MODEL	L	L1	B	B1	B2	H	H1	H2	A	F	F1	PACKING DIMENSIONS			VOLUME ft <sup>3</sup>	WEIGHT lbs
												L	B	H		
EVOSTA 110-127v	6 3/8"	5 55/64"	5 25/64"	3 57/64"	1 1/2"	5 5/8"	3 13/64"	1 13/64"	33/64"	3 3/16"	4 9/64"	5 23/64"	7 1/4"	6 17/32"	0.1467	5.37

