



# Submittal Data Information

## FloodBreaker™ Whole House Water Shut Off

101-161

Effective: June 1, 2013

Supersedes: New

Job: \_\_\_\_\_ Engineer: \_\_\_\_\_ Contractor: \_\_\_\_\_ Rep: \_\_\_\_\_

| ITEM NO. | MODEL NO. |  |
|----------|-----------|--|
|          |           |  |

### Features

Programmable Leak Detection Settings  
Programmable Vacation Mode Leak Settings  
Audible Alarm  
Floor Sensor  
Output Contact  
Input Contact  
Operates on Batteries and 9V DC Power Supply  
Reduces Property Damage  
Push Button Reset  
Mounts in Horizontal or Vertical Pipe

### Performance

Max. Flow: 15.5 gpm (58.7 L/Min)  
*Caution: Flow should never exceed standards for pipe size.*  
Max. Water Temperature 86°F (30°C)  
Max. Inlet Pressure: 230 psi (15.9 Bar)  
Power Supply 9V DC  
(4) AA Batteries  
Connection Sizes: 3/4", 1", 1-1/4" NPT

### Materials



Body: Brass ≤ .25% lead  
Internal Components:  
Brass ≤ .25% lead  
Acetal  
Nylon  
Seals: EPDM

### Approvals



### Application


The Taco FloodBreaker is a whole house adjustable leak detection system that monitors several aspects of water usage. It shuts off the water supply once any of the monitored settings are reached. Use FloodBreaker to protect homes from water damage, eliminate waste and protect unoccupied or vacation properties. Not only can it protect against a large catastrophic leak but is capable of protecting against the small unnoticed leak that could go on for weeks, months or even indefinitely.

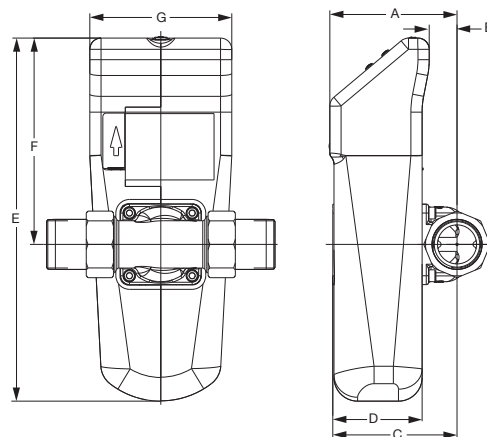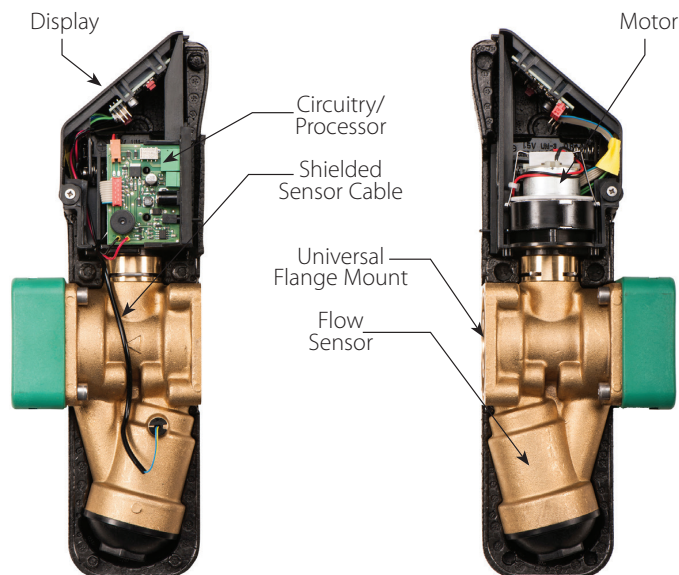

### FloodBreaker™ Dimensions

| DIMENSIONS<br>(For reference only) | In.     | mm  |
|------------------------------------|---------|-----|
| A                                  | 4-1/4   | 108 |
| B                                  | 15/16   | 24  |
| C                                  | 4-1/8   | 105 |
| D                                  | 3       | 76  |
| E                                  | 12-3/32 | 307 |
| F                                  | 6-55/64 | 174 |
| G                                  | 4-47/64 | 120 |

The universal body assembly can be installed into either a vertical or horizontal pipe line as shown



TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360  
TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436  
Visit our website at: [www.taco-hvac.com](http://www.taco-hvac.com)

Printed in USA  
Copyright 2014  
TACO, Inc.