

# ATMO™ 200E

## Fresh Air Appliance (Energy Recovery Ventilator)

Product #: 463891



Fantech's, ATMO 200E is an Energy Recovery Ventilator designed for higher static pressure applications. The unit brings a continuous supply of fresh air into a home while exhausting an equal amount of contaminated air. The energy recovery core at the center of the unit transfers heat and moisture from incoming air to the outgoing air that was cooled and dried by the building's air conditioner.

### Features

- Fans with backward curved blade
- Electrostatic filters (washable)
- ERV core transfers both heat and humidity
- Anti-microbial material
- Withstands freezing
- AHRI certified
- Removable screw terminal for easy connection with external access
- Lightweight 57 lbs (26Kg)
- Multiple speed operation

### Optional Controls

- ECO-Touch™ – Programmable Touch Screen Wall Control
- ECO-Fee|™ – Automatic IAQ Control
- EDF7 – Electronic multi-function dehumidistat
- EDF1 – Multi-function control
- RTS-W – Wireless 20/40/60 minute timer
- RTS5 – 20/40/60 minute over-ride
- RTS2 – 20 minute over-ride
- MDEH1 – Dehumidistat

### Specifications

- Duct size – 6" (152 mm)
- Voltage/Phase – 120/1
- Power rated – 168 W
- Amp – 1.4 A
- Average airflow – 200 cfm (94 L/s)  
@ 0.4" P<sub>s</sub> (100Pa)

### Fans

Two (2) factory-balanced fans with backward curved blades. Motors come with permanently lubricated, sealed ball-bearings to guarantee long life and maintenance-free operation.

### Energy Recovery Core

Energy recovery certified core made from water vapor transport durable polymer membrane that is highly permeable to humidity. The ERV core is freeze tolerant and water washable. Core dimensions are 12" x 12" (305 x 305 mm) with a 15" (381 mm) depth.

### Defrost

A preset defrost sequence is activated at an outdoor air temperature of 14°F (-10°C) and lower. During the defrost sequence, the supply blower shuts down & the exhaust blower switches into high speed to maximize the effectiveness of the defrost strategy. The unit then returns to normal operation, and continues cycle.

### Serviceability

Core, filters, fans and drain pan can be easily accessed through latched door. Core conveniently slides out on our new easy glide core guides. 22" (559 mm) of clearance is recommended for removal of core.

### Case

22 gauge galvanized steel cabinet with a pre-painted steel corrosion resistant door.

### Insulation

Cabinet is fully insulated with 3/4" (19 mm) high density expanded polystyrene.

### Filters

Two (2) washable electrostatic panel type air filters 11.9" (302mm) x 15" (380mm) x 0.125" (3mm).

### Controls

External three (3) position (Low/Stand By/Medium) rocker switch that will offer continuous ventilation. Fantech offers a variety of external controls. (see controls)


### Installation

Unit is typically hung by using installation kit supplied with unit. Mounting chains inserted on hooks located on top four (4) corners of unit. An optional wall bracket is available.

### Warranty

5 years on energy recovery core, 7 year on motors, and 5 year on parts.


## Dimensions & Airflow

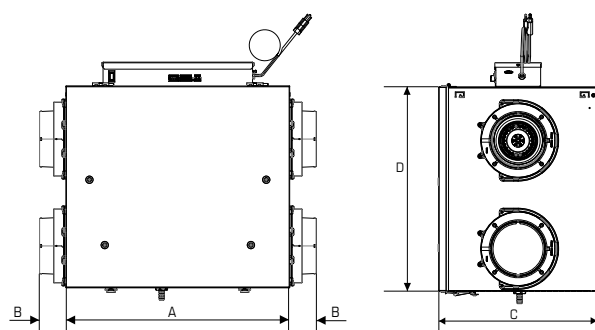

| Model | A  |    | B  |    | C  |    | D  |    |
|-------|----|----|----|----|----|----|----|----|
|       | in | mm | in | mm | in | mm | in | mm |


ATMO 200E 23 7/8 606 29 1/2 751 16 5/8 423 21 7/16 546

Clearance of 22" (559 mm) in front of the unit is recommended for removal of core. All units feature three foot plug-in power cord with 3-prong plug.

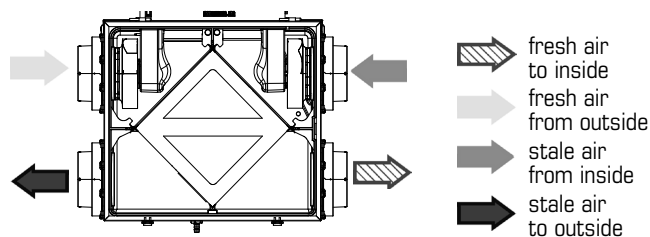

## Ventilation Performance

| in.wg. (Pa)           | 0.1 (25)  | 0.2 (50)  | 0.3 (75)  | 0.4 (100) | 0.5 (125) | 0.6 (150) | 0.7 (175) | 0.8 (200) |
|-----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                       | cfm (L/s) | cfm (L/s) | cfm (L/s) | cfm (L/s) | cfm (L/s) | cfm (L/s) | cfm (L/s) | cfm (L/s) |
| Net supply airflow    | 248 (117) | 233 (110) | 216 (102) | 201 (95)  | 182 (86)  | 167 (79)  | 150 (71)  | 131 (62)  |
| Gross supply airflow  | 250 (118) | 235 (111) | 218 (103) | 203 (96)  | 184 (87)  | 170 (80)  | 153 (72)  | 133 (63)  |
| Gross exhaust airflow | 248 (117) | 229 (108) | 214 (101) | 197 (93)  | 182 (86)  | 165 (78)  | 146 (69)  | 131 (62)  |

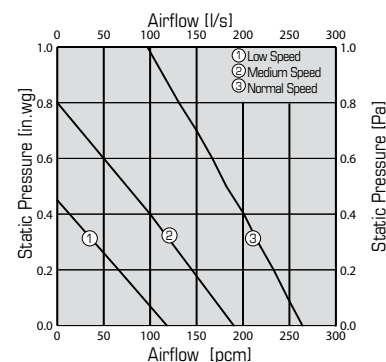

## Energy performance

|         | Supply temperature |     | Net airflow |     | Consumed power | Sensible recovery efficiency | Adjusted sensible recovery efficiency | Latent recovery/moisture transfer |
|---------|--------------------|-----|-------------|-----|----------------|------------------------------|---------------------------------------|-----------------------------------|
|         | °F                 | °C  | cfm         | L/s | W              | %                            | %                                     | %                                 |
| Heating | 32                 | 0   | 66          | 31  | 52             | 75                           | 81                                    | 72                                |
|         | 32                 | 0   | 178         | 84  | 115            | 67                           | 70                                    | 55                                |
|         | -13                | -25 | 66          | 31  | 49             | 60                           | 63                                    | 59                                |

|         | Supply temperature |    | Net airflow |     | Consumed power | Total recovery efficiency | Adjusted Total recovery efficiency | Latent recovery/moisture transfer |
|---------|--------------------|----|-------------|-----|----------------|---------------------------|------------------------------------|-----------------------------------|
|         | °F                 | °C | cfm         | L/s | W              | %                         | %                                  | %                                 |
| Cooling | 95                 | 35 | 64          | 30  | 49             | 65                        | 68                                 | 72                                |
|         | 95                 | 35 | 178         | 84  | 120            | 55                        | 58                                 | 61                                |

## Requirements and standards

- Complies with the UL 1812 requirements regulating the construction and installation of Heat Recovery Ventilators
- Complies with the CSA C22.2 no. 113 Standard applicable to ventilators
- Complies with the CSA F326 requirements regulating the installation of Heat Recovery Ventilators
- Energy Recovery Core is certified for mold and bacteria resistance
- Technical data was obtained from published results of test relating to CSA C439 Standards

## Contacts

|               |             |
|---------------|-------------|
| Submitted by: | Date:       |
| Quantity:     | Model:      |
| Comments:     | Project #:  |
| Location:     |             |
| Architect:    |             |
| Engineer:     | Contractor: |

## Distributed by:

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • [www.fantech.net](http://www.fantech.net)

Canada 50 Kanalfakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • [www.fantech.net](http://www.fantech.net)

Fantech, reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.