

bathfan Select (S) SC50-80-110 Series

Ceiling Mount Exhaust Fans



Perfect to overcome higher static pressure application(s), these ceiling mount exhaust fans offer selectable airflow settings, and features such as continuous flow and time delay. The product is powered by a Direct Current (DC) motor to enable high energy-efficiency and long lasting reliability. Comes with an adjustable EZ mounting frame to enable a multitude of installations.

Features


- Selectable airflow settings: 50/80/110 CFM (24/38/52 L/s)
- Virtually Silent operation
- Design – ideal for 2x8 joist construction and taller
- Energy-efficient, self-compensating DC motor
- Continuous Flow
- Time Delay
- Lighted grille (on SC50-80-110L models only)
- Built-in, soft-close backdraft damper
- Adjustable EZ Mounting Frame included
- Duct connector included
- For ceiling installations only

Specifications (@ 0.1 in. wg. (25 Pa))

• Airflow	50 CFM (24 L/s) 80 CFM (38 L/s) 110 CFM (52 L/s)
• Sones	<0.3–0.6–0.9
• Duct size	6 in. (152mm)
• Voltage/Phase/Hz	120/1/60
• Power rated	5.0–6.8–11.0 W
• Amp	0.2A

Requirements and Standards

- ETL listed
- ENERGY STAR® certified
- Complies with California Title 24
- HVI 2100 certified
- Complies with ASHRAE 62.2

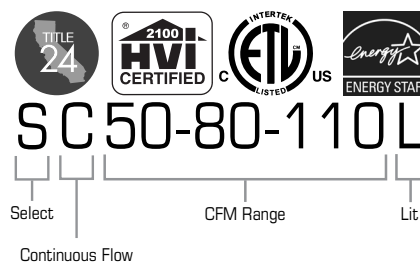

SC50-80-110 part # – 484313
SC50-80-110L part # – 484314

Casing

Constructed of 26 gauge galvanized steel for corrosion resistance. Detachable 6 in. (152mm) collar which includes a lightweight, built-in, soft-close backdraft damper. Adjustable EZ mounting frame included allows for ideal positioning.

Motor/Blower

Total enclosed brushless Direct Current (DC) motor designed to operate continuously. ENERGY STAR® certified motor engineered to maintain rated airflow as static pressure changes—up to 0.4 in. wg. (better than the leading competitors). Removable assembly for mounted replacements.

Grille

Low profile: constructed of a rugged polymeric resin known for its long life durability. Powerful torsion springs seat the trim tightly and evenly to the ceiling surface. Includes an 11W, 4000K cool white LED lighted grille (on SC50-80-110L models only).

Selectable Airflow Settings

Integrated toggle switches for high speed selection—50/80/110 CFM (24/38/52 L/s).

Continuous Flow

If activated, continuous flow allows the fan to run nonstop at a preset lower level. Adjustable from 0 and 30 CFM, up to the selected high-airflow setting (this feature deactivates when set between 0–30 CFM (0–14 L/s)).

Time Delay

Maintains the selected high-airflow setting for a period of time between 5–60 minutes (this feature deactivates when set between OFF–5 minutes).

Ceiling Radiation Damper

bathfan Select (S) Series to be used with the UL555C Fantech Ceiling Radiation Damper—Large (Model #: 98600, sold separately) or the UL555C Fantech Select Radiation Damper (Model #: 494046, sold separately).


Limited Warranty

5 years


Dimensions

Model	A		B		C		D		E		F	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
SC50-80-110 (#484313)	11- ³ / ₈	289	10- ¹ / ₂	267	7- ⁵ / ₈	194	6	152	13	330	13- ³ / ₄	349
SC50-80-110L (#484314)												

SC50-80-110, #484313

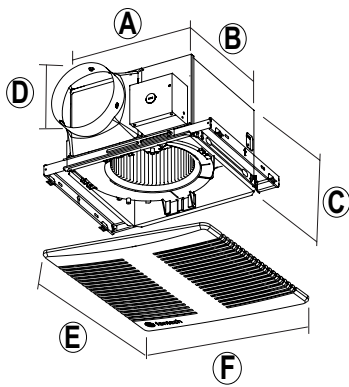

SC50-80-110L, #484314

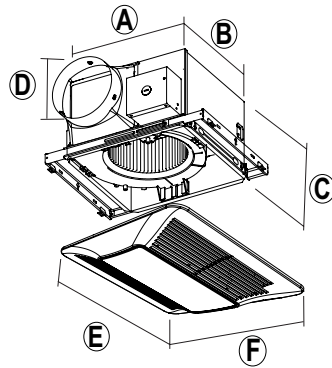

HVI Performance

SC50-80-110 & SC50-80-110L


6 in. (152mm) Duct

0.1 (25) in. wg. (Pa)

Air volume in CFM (L/s)	Noise (Sones)	Rated power (W)
50 (24)	<0.3	5.0
80 (38)	0.6	6.8
110 (52)	0.9	11.0

0.25 (62) in. wg. (Pa)

Air volume in CFM (L/s)	Noise (Sones)	Rated power (W)
47 (22)	0.9	9.1
76 (36)	1.2	11.9
107 (50)	1.5	18.4

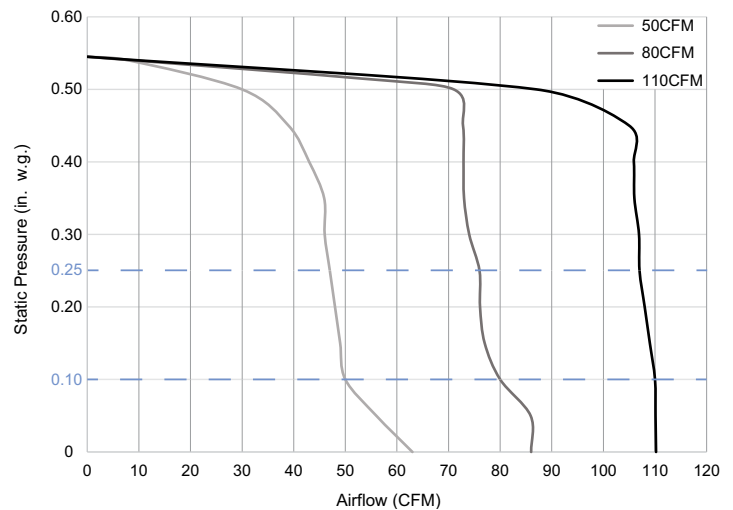

Contacts

Submitted by:	Date:
Quantity:	Model:
Comments:	Project #:
Location:	
Architect:	
Engineer:	Contractor:

Distributed by:

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net

Canada 50 Kanafkay Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech, reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.



fantech®
a systemair company