
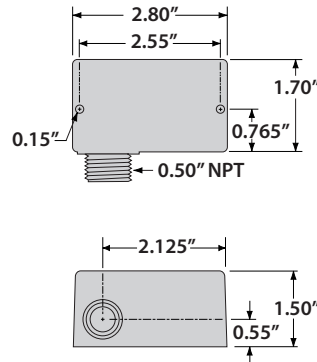


DRY CONTACT INPUT RELAY

RIB21CDC

Dry Contact Relay, 10 Amp SPDT, Class 2 Dry Contact Input, 120-277 Vac Power Input, NEMA 1 Housing

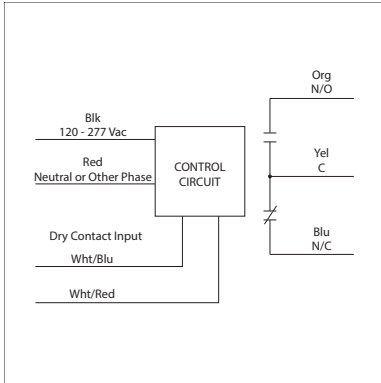

RIB21CDC-N4
NEMA 4X housing, UL508 only



RIB21CDC-RD

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 1.8 Seconds
Relay Status: LED On = Activated
Dimensions: 1.70"H x 2.80"W x 1.50"D with 0.50" NPT hub
Origin: Made of US and non-US parts
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc (N/O)
7 Amp Resistive @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
470 VA Pilot Duty @ 125 Vac
770 VA Pilot Duty @ 250 Vac

Power Input:
50 mA @ 240 Vac Max.

Note:
Dry Contact Input Operation:
Close White/Red wire to activate relay. If more than one dry contact RIB® shares a single dry contact input, White/Blue must be common.