
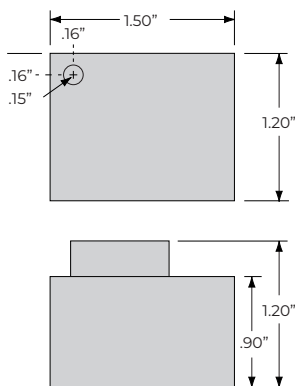


10 AMP CONTROL RELAY

RAM2401C

Relay 10 Amp SPDT, 24 Vac/dc or 120 Vac

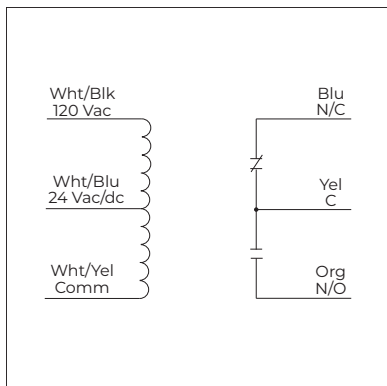

SPECIFICATIONS

# Relays & Contact Type	One (1) SPDT Continuous Duty Coil
Expected Relay Life	10 million cycles minimum mechanical
Operating Temperature	-30 to 104° F
Humidity Range	5 to 95% (noncondensing)
Operate Time	8ms
Relay Status	LED On = Activated
Dimensions	1.5"H x 1.2"W x 1.2"D
Origin	Made of US and non-US parts
Wires	12", 600V Rated
Approvals	UL Listed, UL916, C-UL Canada, CE, RoHS
Gold Flash	No
Override Switch	No

Contact Ratings	10 Amp General Use @ 120/240 Vac 7 Amp General Use @ 277 Vac 10 Amp Resistive @ 30 Vdc (N/O) 7 Amp Resistive @ 30 Vdc (N/C) C300 Pilot Duty 1000 VA Ballast @ 120 Vac (N/C) 1/4 HP @ 277 Vac (N/O) 1/2 HP @ 120 Vac (N/O)
Coil Current	20 mA @ 24 Vdc 50 mA @ 24 Vac, 50-60 Hz 30 mA @ 120 Vac, 50-60 Hz
Coil Voltage Input	24 Vac/dc ; 120 Vac ; 50-60 Hz Drop Out = 10 Vac / 10 Vdc Pull In = 16 Vac / 18 Vdc