



# Master Flow EZ Cool™ Plug-in Power Attic Vent

Help remove damaging heat and moisture from the attic and protect the roof system from premature deterioration



- Conveniently plugs into a standard 110v electrical outlet in the attic
- Helps eliminate hardwiring and the need for an electrician
- High-efficiency motor with preset thermostat

# Master Flow EZ Cool™ Plug-in Power Attic Vent

Roof Mount  
model # EZCR1

## Benefits:

- **Plugs into a standard 110v grounded electrical outlet in the attic**, helping eliminate the need for hardwiring and expensive, hard-to-schedule electricians
- **Extra-long 25' (7.62 m) power cord with plug** for optimal flexibility when selecting a location for your vent
- **Includes a factory-preset thermostat** to reduce hassles and help ensure the vent operates when you need it most; also available with **optional Humidistat/Thermostat** control
- **High-efficiency PSC motor**
- **Galvanized-steel construction** for durability
- **Passes the 110 mph wind-driven rain test** under controlled laboratory testing per TAS 100-(A) and passes UL2218 Class 4 impact-resistance test<sup>1</sup>
- **Eligible accessory product** in the Attic Ventilation category of GAF residential enhanced warranties<sup>2</sup>

## Balanced Attic Ventilation:

Balanced attic ventilation means an equal amount of air entering and exiting. The amount of exhaust ventilation at or near the ridge must **never** exceed the amount of intake ventilation at or near the soffits. A minimum of 1 sq. ft. of net free

ventilation for every 300 sq. ft. of attic floor space is recommended, but always consult local building codes to ensure compliance with local ventilation requirements. For more information, visit [gaf.com/ventcalculator](https://www.gaf.com/ventcalculator) and see the chart below.

Also available in Gable Mount models. See specifications chart below for further details.

| Master Flow EZ Cool™ Plug-in Power Attic Vents                      | Roof Mount EZCR1                  | Gable Mount EZCG1                  | Gable Mount EZCG2 |
|---------------------------------------------------------------------|-----------------------------------|------------------------------------|-------------------|
| Maximum Attic Floor Sq. Ft. per Vent                                | 2,000                             | 2,400                              | 3,000             |
| CFM Airflow (Third-Party Verified) <sup>3</sup>                     | 1,050                             | 1,375                              | 1,600             |
| Minimum Intake Ventilation (Sq. In. of NFA) per Vent                | 504                               | 660                                | 768               |
| ETL Listed                                                          | Yes                               | Yes                                | Yes               |
| Factory-Preset Thermostat                                           | Yes                               | Yes                                | Yes               |
| Optional Humidistat/Thermostat                                      | Available option — model #EZCR1HT | Available option — model # EZCG1HT | N/A               |
| 25' (7.62 m) Power Cord with Plug                                   | Yes                               | Yes                                | Yes               |
| Fan Blade Guard                                                     | N/A                               | Yes                                | Yes               |
| Available Colors                                                    | Black, Weathered Wood, Brown      | Black                              | Black             |
| Limited Warranty Against Manufacturing Defects (Years) <sup>4</sup> | 5                                 | 5                                  | 10                |


## Product Details (Roof Mount Unless Noted):

### Nominal Specifications

- For roof pitches 2:12 – 12:12
- Opening size: 15" (381 mm)
- Heavy-duty internal screen

### Code Approvals & Standards (Roof Mount EZCR1 only)

- Miami-Dade County Product Control Approved
- State of Florida Approved
- Texas Department of Insurance Product Evaluation RV-38
- Intertek-ETL Listed to UL507 (Roof & Gable Mount)
- Meets certain FORTIFIED Roof™ requirements. Visit [gaf.com/Fortified](https://www.gaf.com/Fortified) and current FORTIFIED Home™ Standard available at [fortifiedhome.org](https://fortifiedhome.org) for details. U.S. only.

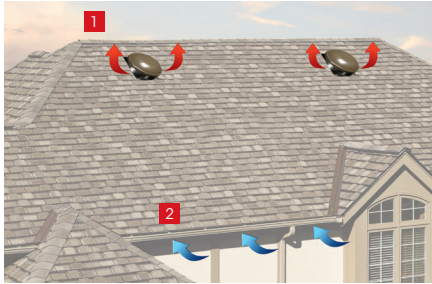

1. Warm, moist air is exhausted from the attic through the **Master Flow EZ Cool™ Plug-in Power Attic Vents**.
2. Fresh air enters the attic through intake vents at or near the soffit

<sup>1</sup> Testing performed under controlled laboratory conditions. Hail damage is not covered under GAF limited warranties.

<sup>2</sup> See GAF System Plus, Silver Pledge™ or Golden Pledge® Limited Warranty for complete coverage and restrictions.

<sup>3</sup> Based on laboratory testing in accordance with ANSI/AMCA Standard 210-16 and ANSI/ASHRAE 51-16 at 0 static pressure.

<sup>4</sup> See Master Flow™ Powered Ventilation Products Limited Warranty for complete coverage and restrictions.