


Spec Sheet

SPECS	GFX5
Model #	GFX5
GFI #	7172
Voltage	20-30 VAC, 60HZ
Switching Load	1amp max. 30 volt
Outdoor Sensor	max. 200ft (61 m.)
Control Mode	Auto: 10% - 60% RH control range / outdoor temp -10F (-23C) min. Manual: 10% - 75% RH
RH Accuracy	@77F (25C) 20% - 80% +/-4% RH
Annual Drift	+/-0.5% RH
Indoor Temp	+/-2F (1C)
Outdoor Temp	+/-2F (1C)
Resolution Temp	1 deg / 1%
Relay Close	Setting -1% RH
Relay Open	Setting +1% RH
Warranty	1 year

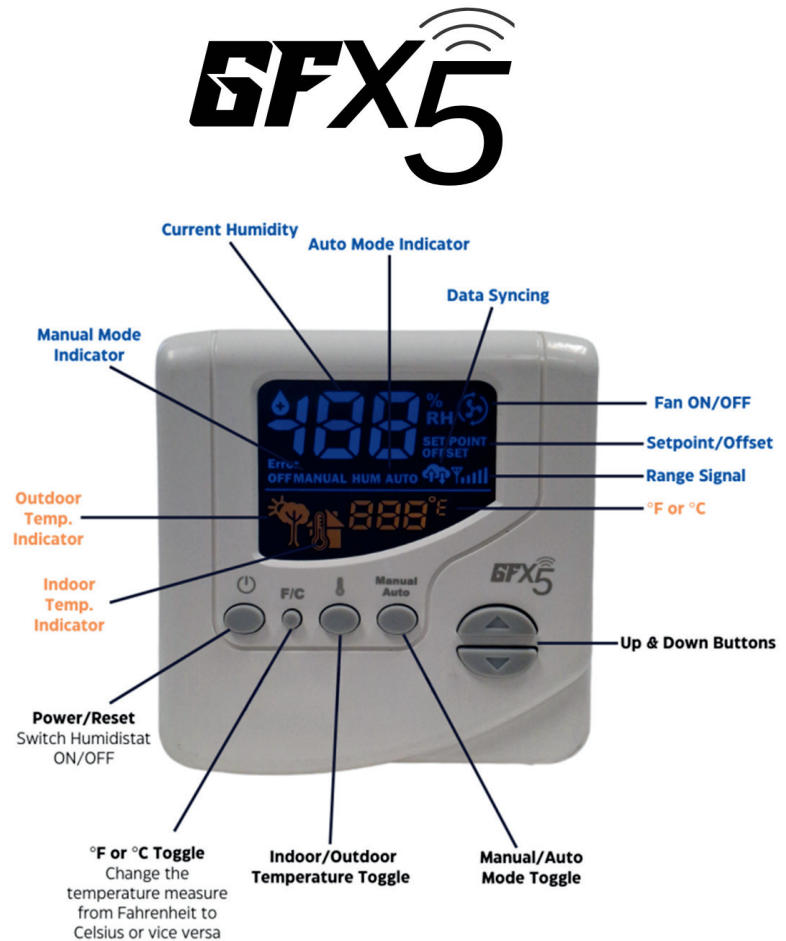

FEATURES

- Wi-Fi enabled through the GeneralAire® APP
- Universal Wi-Fi technology, the GFX5 can be used with any brand/model humidifier
- Automatic control (with sensor included) or can be operated in Manual mode
- Activates the furnace blower motor



Install The App

Your GFX5 humidistat can be connected to a Mobile app, and you can control the humidistat using your cellular device. GFX5 WIFI/APP connection Manual will act as a guide to help you connect the Humidistat with the Application for iPhone and/or Android Mobile Device.



Go to your App store and in the search column, type GeneralAire Humidification and click download. After you have downloaded the App on your phone, click open and follow the following steps.



App Humidity Screen



Go to your Play store and in the search column, type GeneralAire Humidification and click download. After you have downloaded the App on your phone, click open and follow the following steps.



GeneralAire Humidification
App Logo