

Features:

GHE27720

- Vitreous China
- High Efficiency 0.5 gpf (1.9 Lpf)
- ADA compliant
- Flushing Rim
- Washout Flush Action system
- Top spud 3/4" for Exposed Flushometer Inlet
- 2" Outlet spud NPT G0099160 Included
- Dual Wall Hanger G0099290 Included
- Flushometer not included
- Strainer not included



Technical Information:

Configuration	Wall-mount
Water per Flush	0.5 gpf (1.9 Lpf)
Height	21 5/8"
Width	14 1/8"
Depth	14"
Inlet	3/4"
Outlet	2"
Shipping weight	38.8 lbs

Accessories: (To Be Purchased Separately)


N/A

Available Colors:

- White Only
- Other: Refer to Price Book for additional colors/finishes

Warranty:

- Limited Lifetime on Vitreous China, refer to the website for more details.

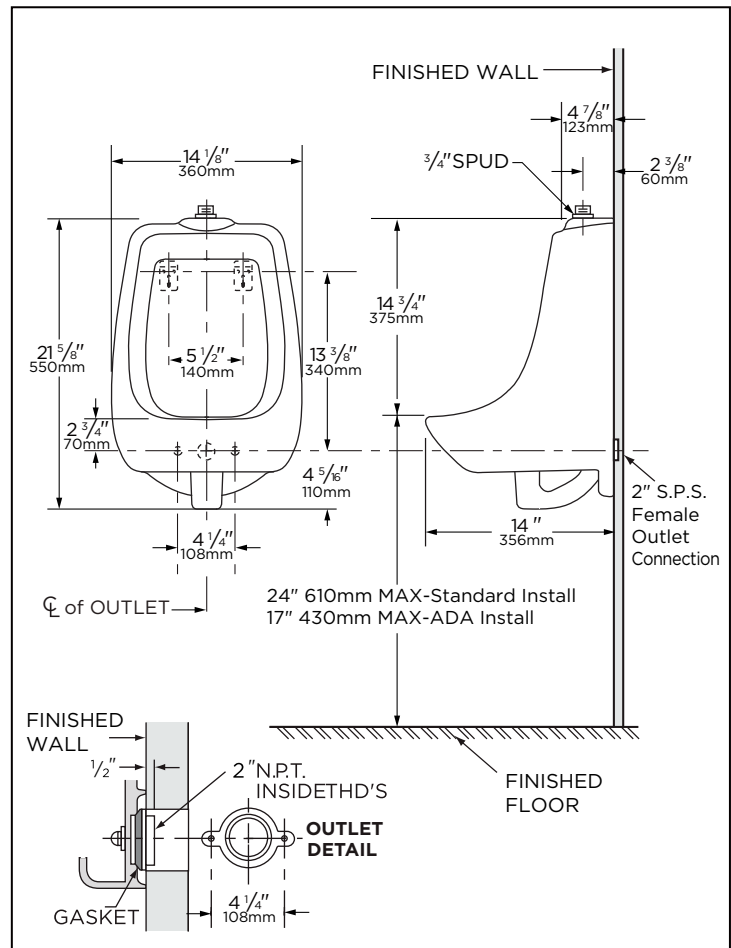

HIGH EFFICIENCY URINAL

HEU



NOTES: All dimensions are in inches and millimeter. Illustrations may not be drawn to scale.

Use flush valve MFR'S recommended rough-in.

Recommended static water pressure for plumbing fixtures is 20-80 psi static per ASME standards A112.19.2 Appendix B.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A 112.19.2

PLUMBERS NOTE: Provide suitable reinforcement for all wall supports.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH-EFFICIENCY URINAL WITH AN AVERAGE CONSUMPTION OF 0.5 gpf (1.9 Lpf) OR LESS.