

SUBMITTAL DATA

FXU48HP230V1R32AH / FXU48HP230V1R32AO
48000 BTU/H Unitary Heat Pump Split System

Job Name	Location	Date
Purchaser	Engineer	
Submmited to	For	
Unit Designation	Schedule No.	

 FXU48HP230V1R32AH	 FXU48HP230V1R32AO
--	--

GENERAL FEATURES


- AHRI Certificate: [215213331](#)
- High Efficiency DC Inverter Technology
- 24VAC Thermostat Compatible
- Zero Lot Line Design
- Match with GREE or Competitive Indoor Unit
- New R32 Refrigerant
- Designed for New Construction or Replacement Market
- Low Ambient Cooling down to -15°C (5°F)
- Low Ambient Heating down to -30°C (-22°F)
- Coil (Outdoor) Copper Tube/Aluminum Fin with Anti-Corrosion Coil Coating (Gold Colored Fin - 1500Hr Salt Spray Rating)
- Coil (Indoor) Copper Tube/Aluminum Fin with Anti-Corrosion Coil Coating (Blue Colored Fin - 500Hr Salt Spray Rating)

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SYSTEM TYPE		
Outdoor Model		FXU48HP230V1R32AO
Indoor Model		FXU48HP230V1R32AH
SYSTEM PERFORMANCE\$		
Cooling Capacity	Min - Max	Btu/h 33,792 - 55,000
	Capacity @95°F	Btu/h 48,000
Heating Capacity	Min - Max	Btu/h 25,162 - 50,880
	Capacity @47°F	Btu/h 48,000
	Capacity @17°F	Btu/h 39,500
	Capacity @5°F	Btu/h 48,000
SEER2		19.0
EER2		12.0
HSPF2		10.0
COP @5°F		2.0
Cooling Temperature Range	°F	5 - 129
Heating Temperature Range	°F	-22 - 75
Refrigerant Type		R32
INDOOR UNIT		FXU48HP230V1R32AH
Power Supply	VAC	208-230V / 1Ph / 60 Hz
Sound Pressure Level	dB(A)	52
Control Voltage	VAC	24
Rated Current Cooling	A	2.1
Rated Current Heating	A	1.9
MCA	A	7.1
MOCP	A	15
Electric Heater (Optional)	kW	6, 9, 12
Air Flow	CFM	1200
External Static Pressure (Up to)	In W.c.	1.0
Dehumidification	pt/hr	/
External Dimensions (W x H x D)	in	24-13/16 x 52 x 21-1/4
Package Dimension (W x H x D)	in	27-1/4 x 54-3/16 x 26
Net Weight	lbs	199.5
Gross Weight	lbs	218.3
OUTDOOR UNIT		FXU48HP230V1R32AO
Power Supply	VAC	208-230V / 1Ph / 60 Hz
Sound Pressure Level	dB(A)	62
Control Voltage	VAC	24
Rated Current Cooling	A	21.08
Rated Current Heating	A	21.81
MCA	A	39.9
MOCP	A	45
Cmpressor Type		GREE G20 / Double Cylinder / 2 - Stage Inverter
External Dimensions (W x H x D)	in	35-7/16 x 49-5/8 x 13-3/8
Package Dimension (W x H x D)	in	40-11/16 x 55-3/16 x 17-3/8
Net Weight	lbs	241.4
Gross Weight	lbs	263.5
Refrigerant Charge - R32	oz	162.3
Additional Charge	oz/ft	0.215
REFRIGERANT PIPING		
Line Set Size (Liquid - Gas) - Flared Connections	in	3/8 - 3/4
Pre-Charge Length	ft	31
Pipe Length (Min - Max)	ft	10 - 98
Max. Pipe Elevation	ft	49

FEATURES & FUNCTIONS SUMMARY	
Ultra Low Frequency Torque Control	Yes
Power Factor Correction	Yes
Outdoor Electronic Expansion Valve (EEV)	Yes
Indoor TXV Control	Yes
Basepan With Electric Heater	Yes
Compressor With Electric Heater	Yes
Fin Coating (Outdoor - Golden & Indoor - Blue)	Acrylic Resin
Intelligent Defrosting	Yes
Intelligent Preheating	Yes
Low Voltage Startup	Yes
Memory/Power Failure Recovery	Yes
Self Diagnosis	Yes
Low Ambient Cooling	Yes
24VAC Thermostat Compatible	Yes
Indoor Fan Type	Centrifugal
Multi Fan Speeds	5 Speeds
Auxiliary Electrical Heater	Optional

FAN PERFORMANCE

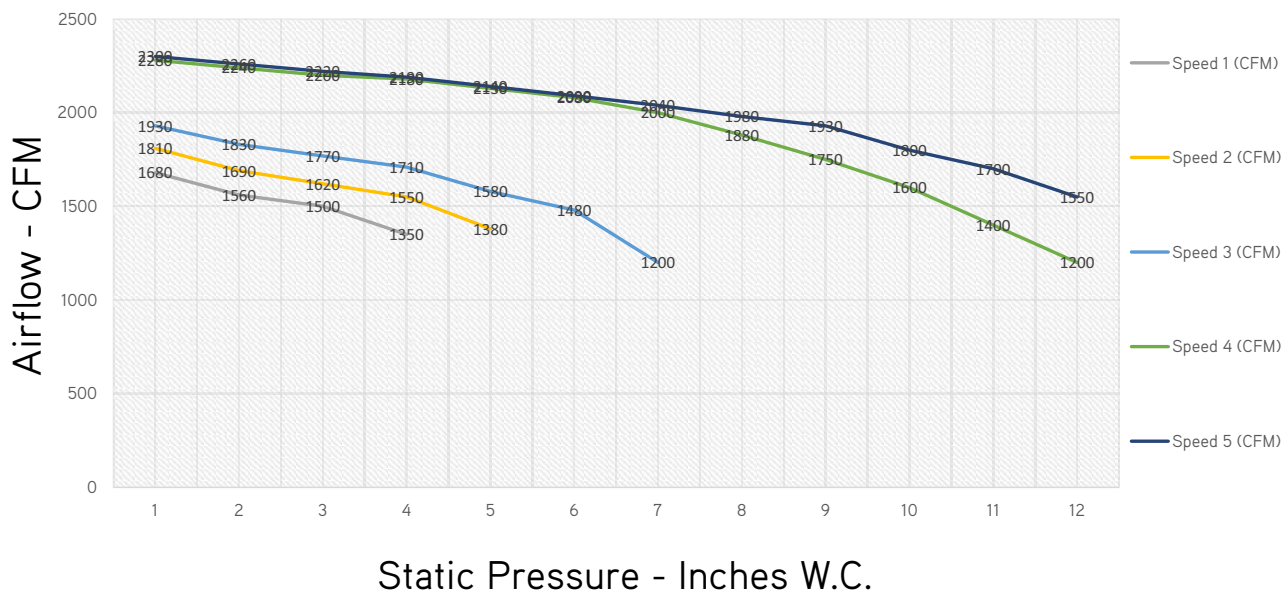

STATIC PRESSURE Inches W.C.	0	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Speed 1 - CFM	1680	1560	1500	1350								
Speed 2 - CFM	1810	1690	1620	1550	1380							
Speed 3 - CFM	1930	1830	1770	1710	1580	1480	1200					
Speed 4 - CFM	2280	2240	2200	2180	2130	2080	2000	1880	1750	1600	1400	1200
Speed 5 - CFM	2300	2260	2220	2190	2140	2090	2040	1980	1930	1800	1700	1550

NOTE:


- 1. Above chart CFM ratings are based on dry coil with factory filter installed.
- 2. For wet coil CFM ratings, multiply the CFM by 0.96 correction factor.

DIMENSIONS

INDOOR UNIT

Unit: inch


FXU48HP230V1R32AH	
DIMENSIONS	
A	11-5/8
B	20
H	52
W	24-13/16
D	21-1/4

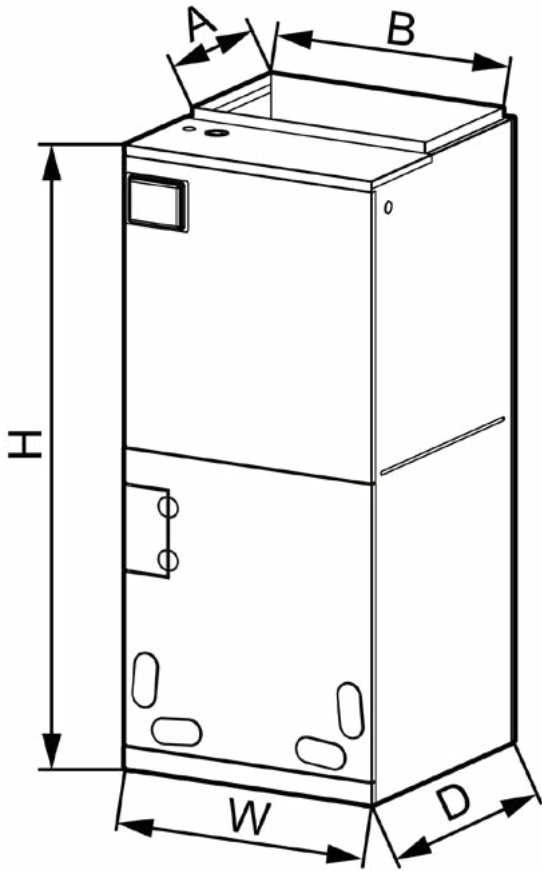


OUTDOOR UNIT

Unit: inch

FXU48HP230V1R32AO	
DIMENSIONS	
A	35-7/16
B	16-1/4
C	49-5/8
D	22-7/16
E	14-7/8
G	13-3/8

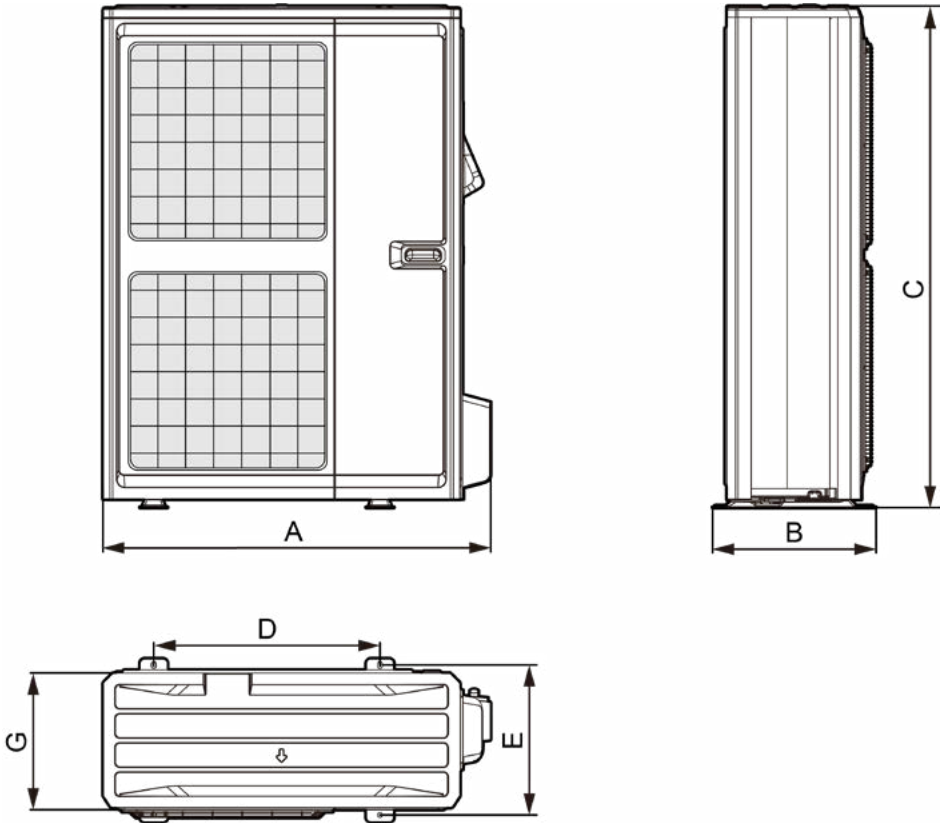

ACCESSORY HEATER AND GENERAL INFORMATION

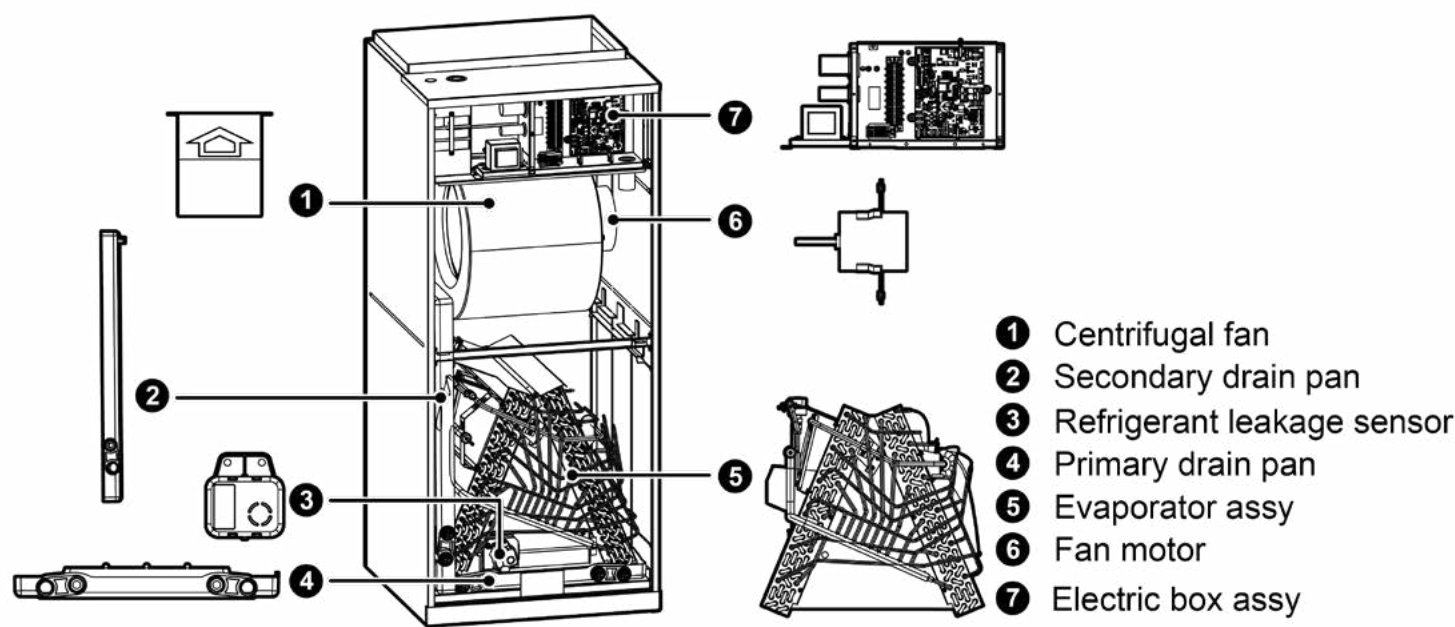

MODEL	Heat Kit Model	Part Number	Electric Heat (kW)		Min. Circuit Ampacity (A)				Max Fuse or Breaker (A)			
			208V	230V	208V		230V		208V		230V	
FXU48HP230V1R32AH	One Mains Supply											
	320004060223	FLEXA2LHTR06	3.74	4.6	31		33		35		35	
	Two Mains Supply											
					Power A	Power B	Power A	Power B	Power A	Power B	Power A	Power B
	320004060224	FLEXA2LHTR09	6.03	7.36	35	13.8	36.9	15	40	15	40	20
	320004060225	FLEXA2LHTR12	7.49	9.2	35	27.5	36.9	30	40	30	40	35



CLEARANCES

INDOOR UNIT


Minimum clearance

FRONT

> 24

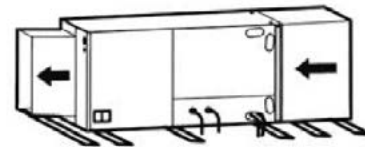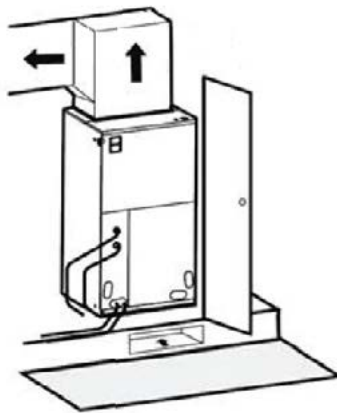

Horizontal Left Configuration - No Modification Needed

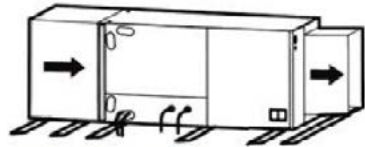

Horizontal Right Configuration - Must Relocate Drain Pan

NOTE:

Allow a minimum of 24" in front of the unit for service clearance. When installing in an area directly over a finished ceiling (such as an attic), an emergency drain pan is required directly under the unit. **See local and state codes for requirements.** When installing this unit in an area that may become wet, elevate the unit with a sturdy, non-porous material. In installations that may lead to physical damage (i.e. a garage) it is advised to install a protective barrier to prevent such damage. This air handler is designed for a complete supply and return ductwork system.

OUTDOOR UNIT


Minimum clearance

NOTE:

Install the Outdoor Unit **2 Inches** Above the Expected Snow Line

1. When one outdoor unit is to be installed.


A - E	H_b H_d H		(in)				
			a	b	c	d	e
B	-	-	-	≥ 4	-	-	-
A, B, C	-	-	≥ 12	≥ 4	≥ 4	-	-
B, E	-	-	-	≥ 4	-	-	≥ 40
A, B, C, E	-	-	≥ 12	≥ 6	≥ 6	-	≥ 40
D	-	-	-	-	-	≥ 40	-
D, E	-	-	-	-	-	≥ 40	≥ 40
B, D	$H_b < H_d$	$H_d < H$	-	≥ 4	-	≥ 40	-
	$H_b > H_d$	$H_d > H$	-	≥ 4	-	≥ 40	-
B, D, E	$H_b \leq 1/2H$		-	≥ 10	-	≥ 80	≥ 40
	$H_b < H_d$	$1/2H < H_b \leq H$	-	≥ 10	-	≥ 80	≥ 40
	$H_b > H$		Prohibited				
	$H_b > H_d$	$H_d \leq 1/2H$	-	≥ 4	-	≥ 80	≥ 40
	$H_b > H_d$	$1/2H < H_d \leq H$	-	≥ 8	-	≥ 80	≥ 40
	$H_d > H$		Prohibited				

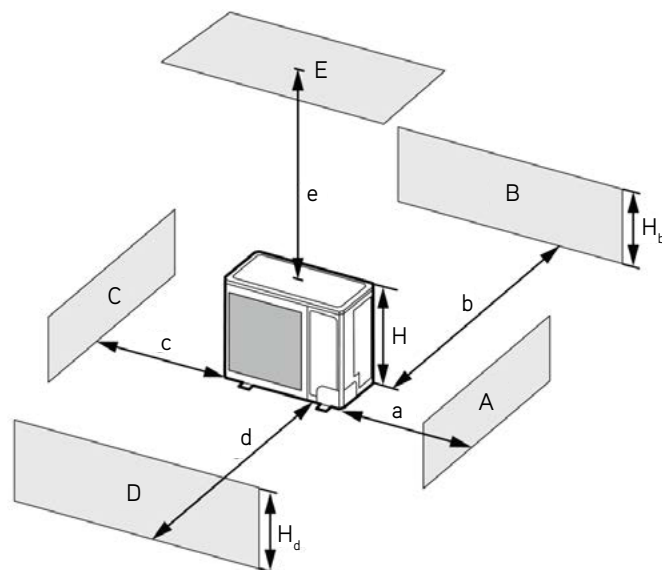

CLEARANCES


2. When two or more outdoor units are to be installed side by side.

A - E	H _b H _d H		(in)				
			a	b	c	d	e
A, B, C	-		≥ 12	≥ 12	≥ 40	-	-
A, B, C, E	-		≥ 12	≥ 12	≥ 40	-	≥ 40
D	-		-	-	-	≥ 80	-
D, E	-		-	-	-	≥ 80	≥ 40
B, D	H _b < H _d	H _d > H	-	≥ 12	-	≥ 80	-
	H _b > H _d	H _d ≤ 1/2H	-	≥ 10	-	≥ 80	-
B, D, E	H _b > H _d	1/2H < H _d ≤ H	-	≥ 12		≥ 100	
		H _b ≤ 1/2H	-	≥ 12	-	≥ 80	≥ 40
	H _b < H _d	1/2H < H _b ≤ H	-	≥ 12	-	≥ 100	≥ 40
	H _b > H		Prohibited				
	H _d ≤ 1/2H		-	≥ 10	-	≥ 100	≥ 40
	H _b > H _d	1/2H < H _d ≤ H	-	≥ 12	-	≥ 100	≥ 40
	H _d > H		Prohibited				

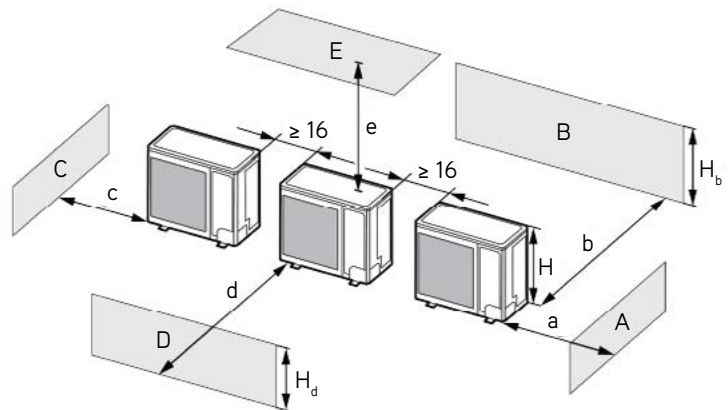

3. When outdoor units are installed in rows.

$H_b \leq H_d$	(in)
$H_b \leq 1/2H$	$b \leq 10$
$1/2H < H_b \leq H$	$b \leq 12$
$H_b > H_d$	Prohibited

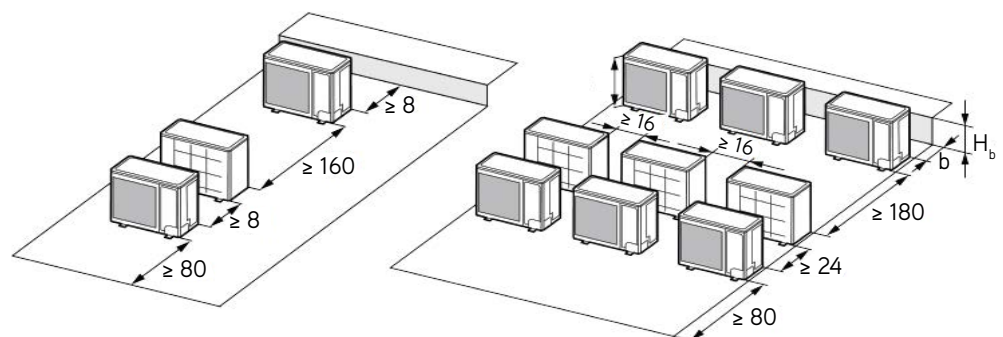

4. When outdoor units are installed one above another.

