


STANDARD FEATURES:

1. 22 GAUGE GALVANIZED STEEL CASING CONSTRUCTION
2. 1/2" DUAL DENSITY LINING
3. ROUND INLET COMPATIBLE WITH NOMINAL RIGID AND FLEX DUCT CONNECTIONS
4. SLIP AND DRIVE DISCHARGE CONNECTION
5. PATENTED FLO-CROSS MULTIPOINT FLO SENSOR
6. 1/2"-DAMPER SHAFT WITH DELRIN BEARINGS AND POSITION INDICATOR
7. LOW LEAKAGE DAMPER WITH SEAL

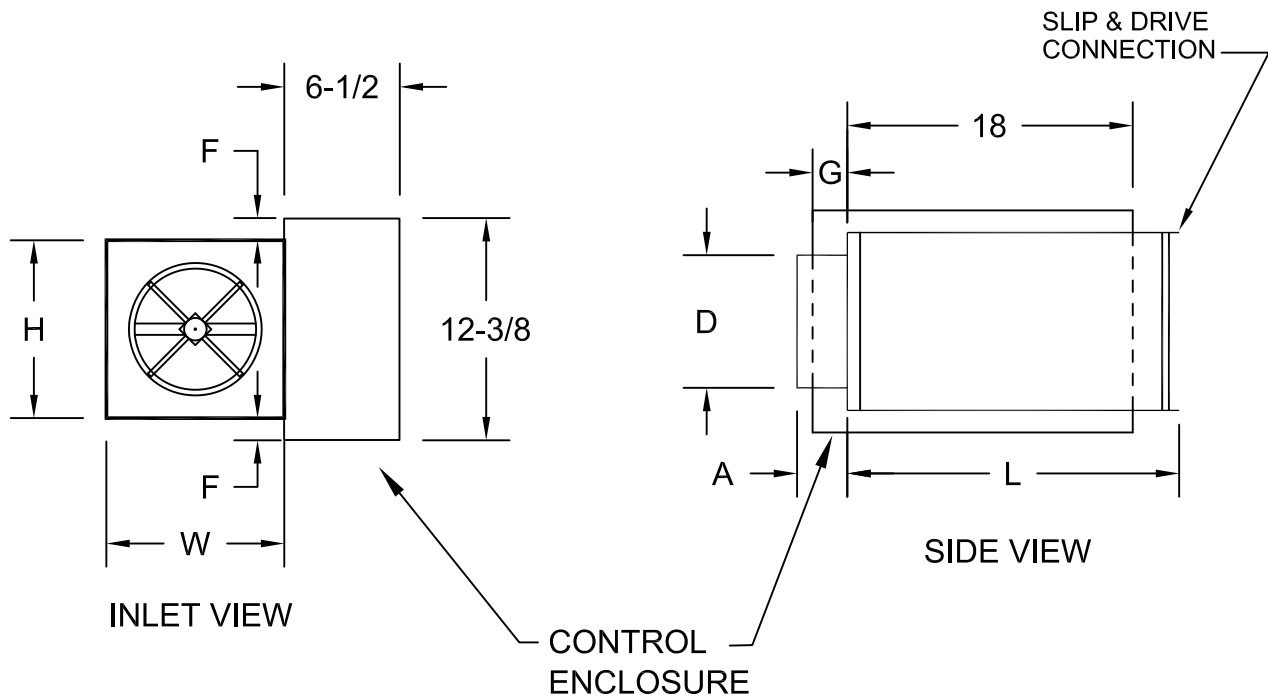

UNIT SIZE	CFM RANGE MIN TO MAX	L	H	W	A	D	F	G
6	0/100 - 520	15 1/2	8	12	3 3/8	5 7/8	2 1/8	7 1/4
8	0/185 - 925	15 1/2	10	12	3 3/8	7 7/8	1 1/8	7 1/4
10	0/290 - 1450	15 1/2	12 1/2	14	3 3/8	9 7/8	-	5 1/4
12	0/420 - 2100	15 1/2	15	16	3 3/8	11 7/8	-	5 1/4
14	0/580 - 2900	15 1/2	17 1/2	20	3 3/8	13 7/8	-	3 1/4

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 1/15/16 DRAWING NUMBER: SD-9818
**HCVB - SINGLE DUCT TERMINAL UNIT
 BASE UNIT**