


HELIX® 3015



Innovation intertwined with safety. That's the DNA of the Helix® Series. The Helix® 3015 features an ultra-thin, extremely flexible 21-gauge HPPE/steel blend shell for advanced comfort and dexterity on the job.

The back-of-hand IR-X® Impact Exoskeleton™ with a high-flex design provides ANSI/ISEA 138-2019 Level 2 protection, while the micro foam nitrile palm coating provides superior grip, tactility, and touchscreen capabilities.

Protection zones

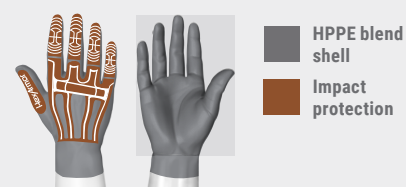

	ANSI/ISEA 105-2024 CUT	A2
	ANSI/ISEA 105-2024 GRAM SCORE	712
	ANSI/ISEA 105-2024 PUNCTURE	3
	ANSI/ISEA 105-2024 ABRASION	5
	ANSI/ISEA 138-2019 IMPACT	2

EN388:2016+A1:2018 **Pending**

Attributes

Shell:		21G HPPE/ steel
Coating:	Material:	Micro foam nitrile
	Finish:	Smooth/light texture
	Weight:	Lightweight
	Breathability:	Good
	Flexibility:	Great
	Grip:	Dry or oil
Sizes:		6/XS through 12/3XL



Touchscreen

Product features

- Ultra-thin, 21-gauge HPPE/steel blend shell
- Micro foam nitrile palm coating provides superior grip
- Sewn-on back-of-hand IR-X® Impact Exoskeleton™ with high-flex design
- Reinforced thumb saddle
- Touchscreen capabilities
- Made with silicone-free materials
- Elastic knit wrist helps prevent dirt and debris from entering the glove
- Ultimate dexterity and tactility
- Seamless construction for enhanced comfort and breathability
- Washable
- Vend-packed

Call **1.877.MY ARMOR** or visit **hexarmor.com**

HexArmor® products are cut and puncture resistant, NOT CUT AND PUNCTURE PROOF. Do not use with moving or serrated blades or tools. User shall be exclusively responsible to assess the suitability of the product as specified for any individual application or use. Protection zones are to be used as a general guide. Actual product protection zones may differ. Product features, design, protection zones subject to change. Protected by patents and patents pending.

UVEX SAFETY GROUP GmbH & Co. KG, parent company of HexArmor®, has achieved a Gold EcoVadis Rating, placing us in the top 5% of sustainable suppliers globally.

