

RC840

Electromechanical Relays

This easy-to-install relay features instant activation and is compatible with 2- and 3-wire 24 V thermostats

MODEL & RATINGS

RC840	2640 W @ 120 V	22 A resistive	0.8 HP inductive	FLA 16 / LRA 42
	4575 W @ 208 V	22 A resistive	1.0 HP inductive	FLA 13 / LRA 42
	5280 W @ 240 V	22 A resistive	1.5 HP inductive	FLA 12 / LRA 42
	5260 W @ 277 V	19 A resistive		
	6245 W @ 347 V	18 A resistive		

All above models operate on 50/60 Hz



Without transformer

SPECIFICATIONS

CONTROL SIGNAL

24 VAC / 40 mA
24 VDC / 35 mA

HUMIDITY LIMITS

0% to 95% non-condensing

TERMINAL WIRE SIZE

12 AWG

DIMENSIONS (H•W•D)

68 x 85 x 36 mm / 2.7 x 3.3 x 1.4 inches

FEATURES

Direct replacement for any brand name relay

Compatible with 24 V thermostats with 2-wire connections (R, W) or 3-wire connections (R, W, C)


Immediate relay activation provides improved temperature control and comfort

Epoxy-soundproofed relay ensures quiet operation

Terminal board connection enables easy installation

Low current consumption means multiple relays can be controlled by a single thermostat

INSTALLATION

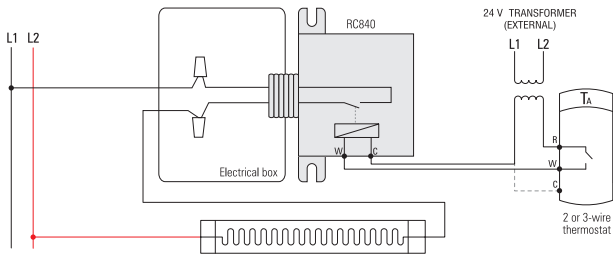

COMPATIBLE WITH AUBE THERMOSTATS:

- TH114-A-024T
- TH115-A-024T
- TH135-01
- TH140-28-01
- TH150 Series



3 year warranty