

Bursting Bubbles Is A Good Thing

The unique design of the Honeywell SuperVent® Air Eliminator automatically separates and removes air from hydronic heating systems, eliminating noise and improving system efficiency. A higher-quality, more flexible replacement for other brands, the Honeywell SuperVent is easier to install and maintain. Plus, it features that famous Honeywell reliability.

Honeywell SuperVent®

More safety and comfort
for your customers.
More profits for you.



Learn More

Call toll-free 1-800-328-5111
Email info@honeywell.com
customer.honeywell.com

Automation and Control Solutions

In the US:
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422-3992

In Canada:
Honeywell Limited
35 Dynamic Drive,
Toronto, Ontario M1V 4Z9

50-9337 PR
May 2008
©2008 Honeywell International Inc. All rights reserved.

Honeywell

Honeywell SuperVent®

Honeywell




ELIMINATE AIR AND NOISE FROM
HYDRONIC HEATING SYSTEMS

Positive Change

PV Series SuperVent® Air Eliminator

The rugged design stands up to tough conditions and continuous service, providing you with leak-proof operation, reduced service intervals and the elimination of callbacks.

To learn more about adding profits with the Honeywell SuperVent®, contact your distributor, call 1-800-328-5111, email info@honeywell.com or visit customer.honeywell.com.

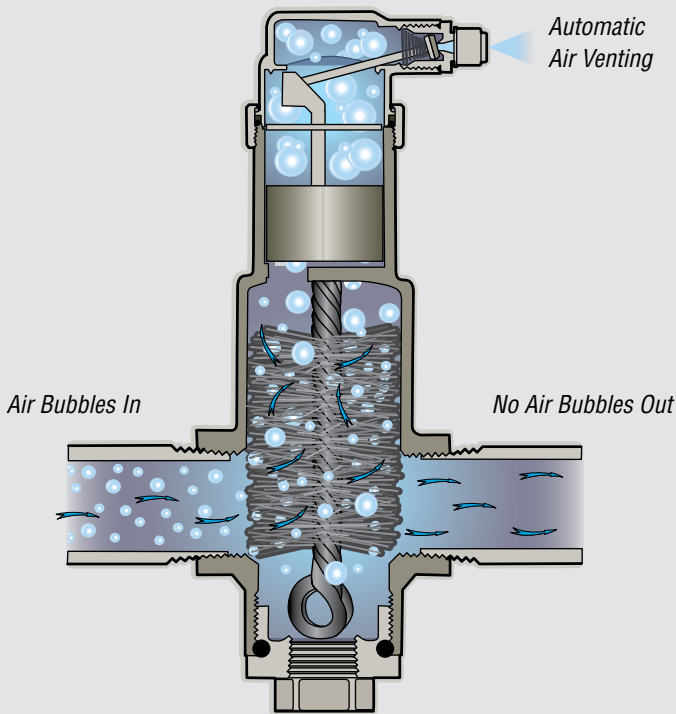

The PV Series SuperVent® eliminates air from hydronic heating systems without bleeding.

Adjustable Vent Top Collar Ring allows easier installation and application flexibility

High Temperature Thermoplastic Float controls venting rate under continuous operation

Bronze Body provides durable construction with no ferrous materials

NPT and Sweat Connections Available — see chart below for more details

No-Clog Vent for peace of mind — no leaking or callbacks

Debris Baffle to control dirt fouling and prevent failure

Encapsulated O-Ring for leak-proof cap seal

Stainless Steel Concentrator — a patented and more efficient way to eliminate air. (US Patent No. 5,490,874)

Brass Bottom Port for expansion tank mounting, ease of installation and maintenance

MODEL #	SIZE	CV	CONNECTION TYPE
PV075	3/4"	13 Cv	NPT
PV075S	3/4"	13 Cv	Sweat
PV100	1"	22 Cv	NPT
PV100S	1"	22 Cv	Sweat
PV125	1-1/4"	38 Cv	NPT
PV125S	1-1/4"	38 Cv	Sweat
PV150	1-1/2"	53 Cv	NPT
PV200	2"	95 Cv	NPT
PVU	Universal models available for vertical risers		